

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757126

Luminaire Tested: LD6D02D010-EU6DR300210IC9024-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P757126
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR300210IC9024-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 304.8 lumens
Efficiency: N/A
Efficacy: 59.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757126

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBS1B

Luminous Intensity Polar Plot

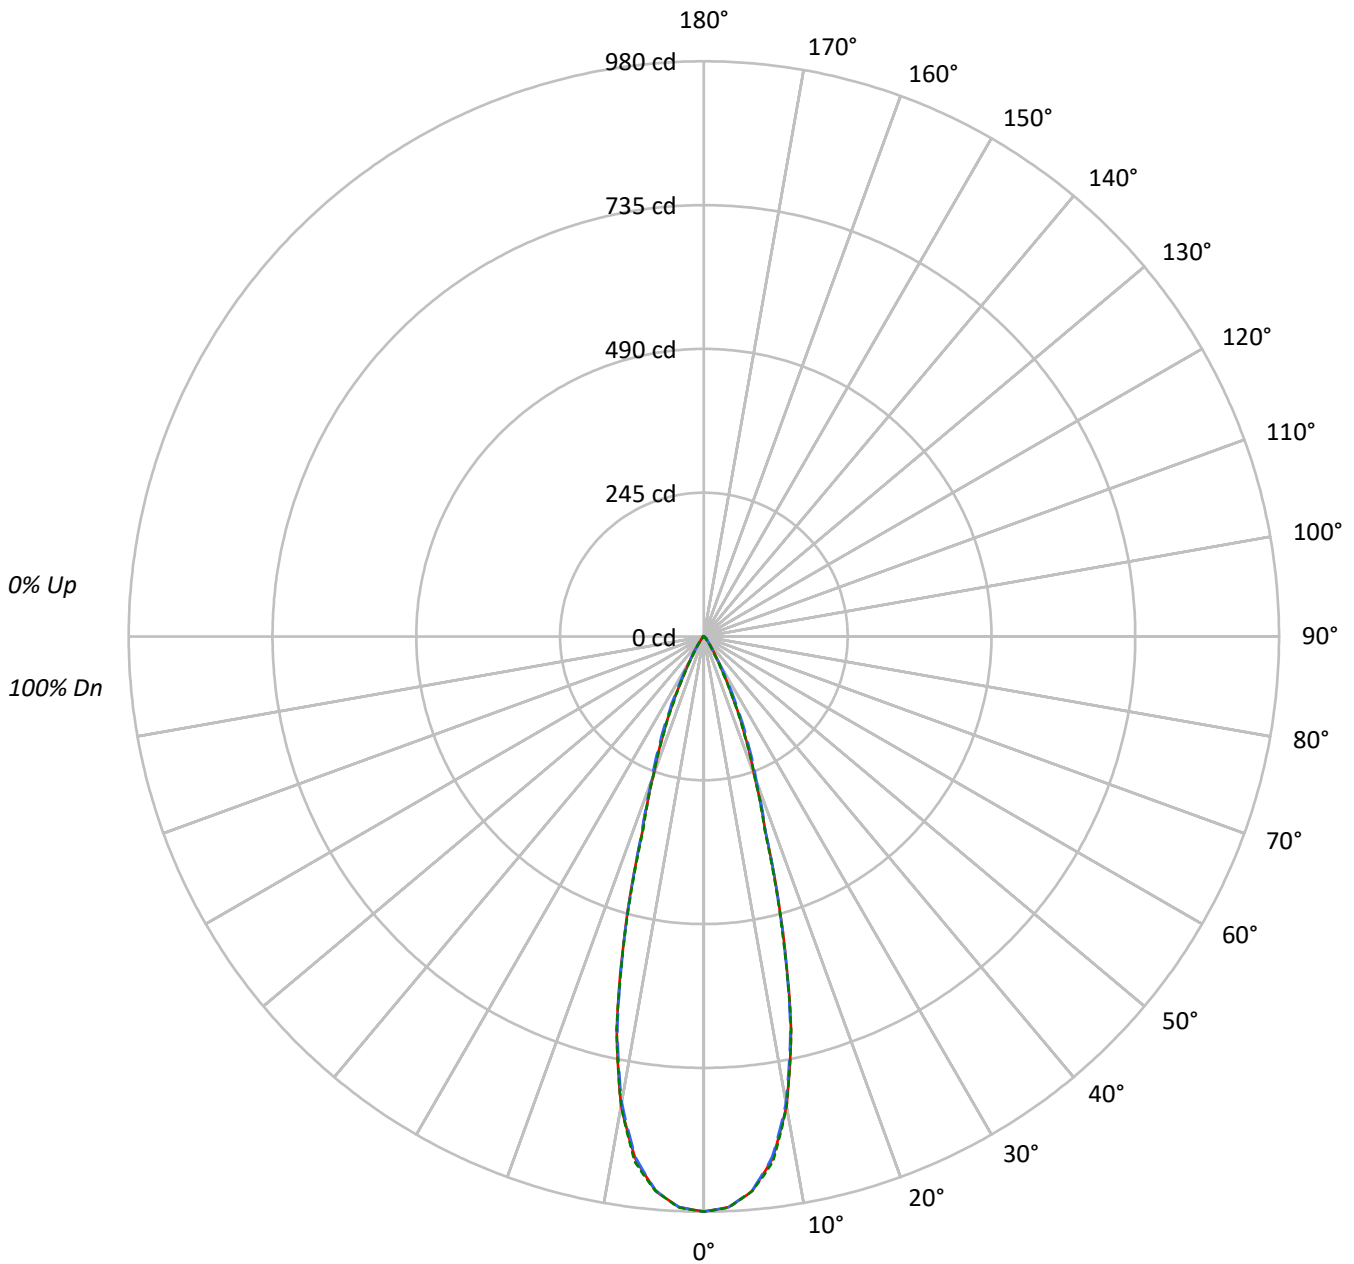



TEST NUMBER: P757126

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	75005	75005	75005
5°	72856	72771	72856
10°	63104	62653	63089
15°	41175	40945	40747
20°	20478	21236	20445
25°	10312	11630	10101
30°	4128	4499	3597
35°	1916	1841	1532
40°	829	919	779
45°	585	725	585
50°	202	524	214
55°	120	227	120
60°	77	92	77
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 725 cd/sqm



TEST NUMBER: P757126

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.2	28.3
10°-20°	138.8	45.5
20°-30°	60.0	19.7
30°-40°	13.7	4.5
40°-50°	4.7	1.5
50°-60°	1.1	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	284.9	93.5
0°-40°	298.6	98.0
0°-60°	304.4	99.9
0°-90°	304.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	304.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	980	980	980	980	980	
5°	948	947	947	949	948	86
15°	520	513	517	515	514	139
25°	122	127	138	124	120	58
35°	20	21	20	20	16	14
45°	5	7	7	7	5	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P757126

CATALOG NUMBER: LD6D02D010-EU6DR300210IC9024-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	979.9	979.9	979.9	979.9	979.9
2.5°	973.4	972.8	973.2	973.6	973.8
5°	948.2	947.3	947.1	949.0	948.2
7.5°	897.2	895.9	894.0	898.4	902.6
10°	811.9	810.4	806.1	808.3	811.7
12.5°	685.9	681.2	681.1	687.8	687.0
15°	519.6	513.3	516.7	515.1	514.2
17.5°	349.4	347.0	351.6	350.2	344.2
20°	251.4	252.0	260.7	256.3	251.0
22.5°	183.4	185.6	196.1	184.7	180.5
25°	122.1	126.7	137.7	123.5	119.6
27.5°	75.1	77.2	88.3	74.1	72.0
30°	46.7	45.7	50.9	43.7	40.7
32.5°	30.7	29.3	31.0	27.8	25.4
35°	20.5	20.9	19.7	19.5	16.4
37.5°	12.8	14.7	13.0	13.9	10.6
40°	8.3	10.7	9.2	10.1	7.8
42.5°	6.8	8.3	7.6	8.0	6.9
45°	5.4	6.7	6.7	6.7	5.4
47.5°	3.0	4.5	5.7	4.6	3.2
50°	1.7	2.2	4.4	2.3	1.8
52.5°	1.1	1.3	3.0	1.4	1.2
55°	0.9	0.9	1.7	1.0	0.9
57.5°	0.7	0.7	0.9	0.7	0.7
60°	0.5	0.5	0.6	0.6	0.5
62.5°	0.4	0.4	0.5	0.4	0.4
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)