

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757748

Luminaire Tested: LD6D02D010-EU6DR700210IC9024-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757748  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR700210IC9024-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 335.1 lumens  
Efficiency: N/A  
Efficacy: 65.7 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757748

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9024-6LBDP1LI

### Luminous Intensity Polar Plot

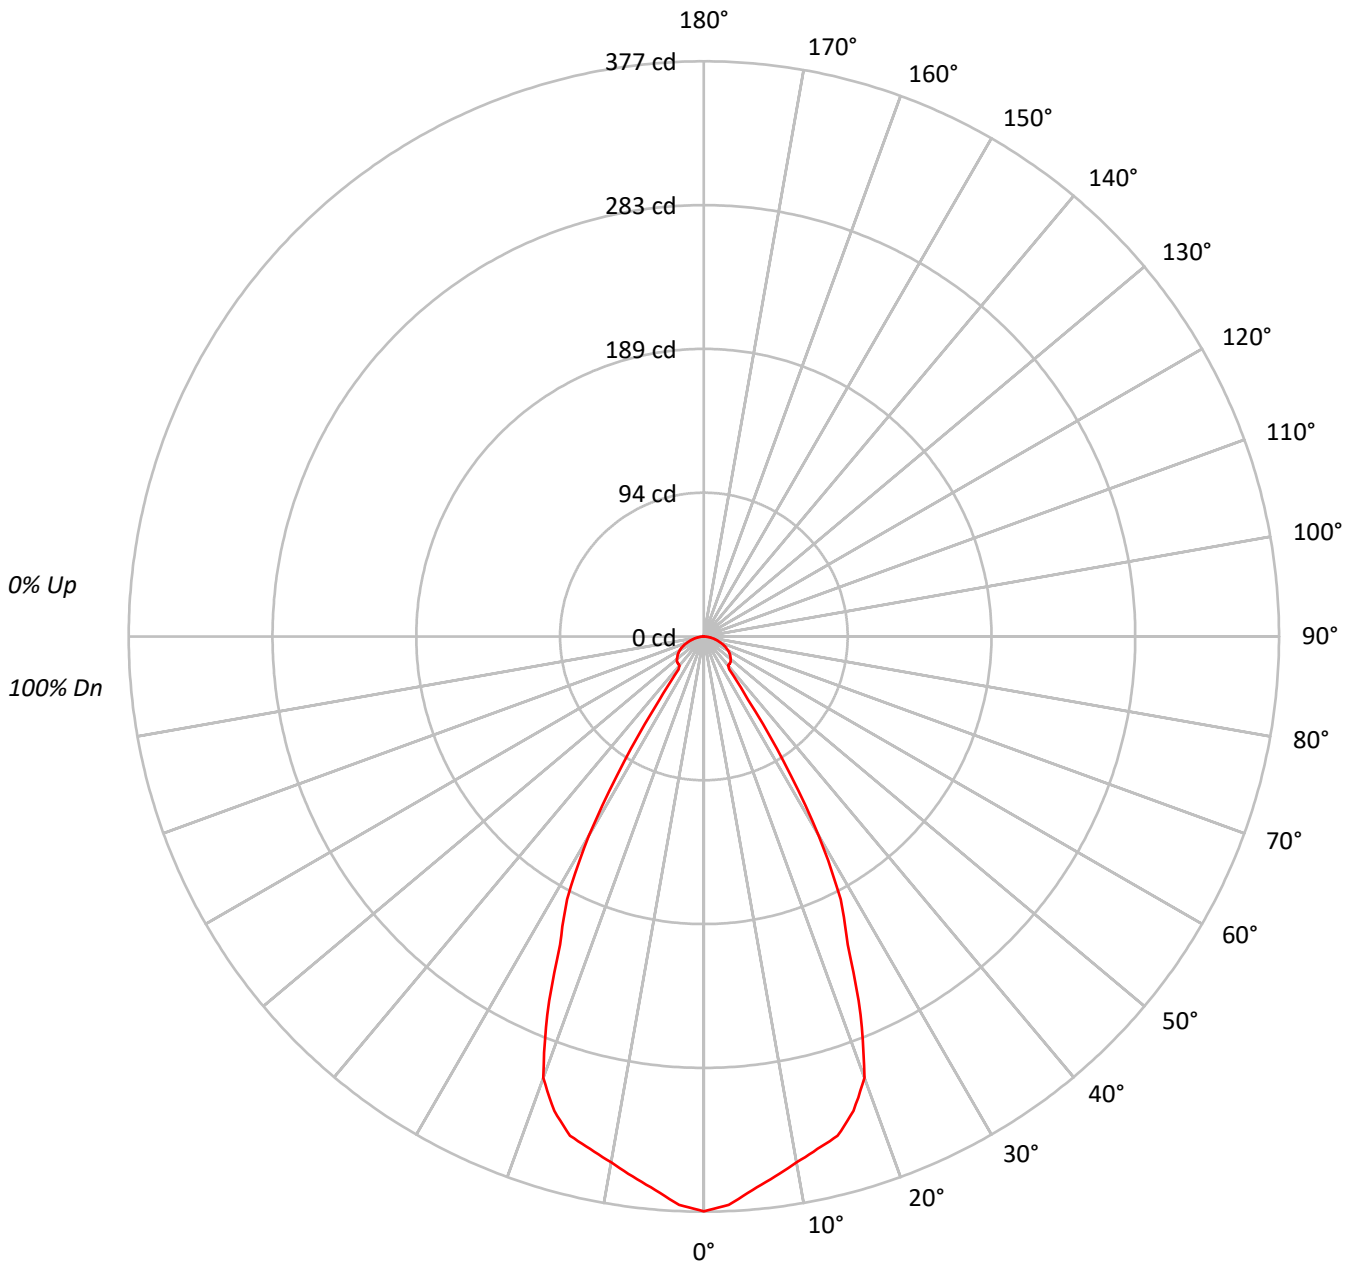



TEST NUMBER: P757748

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9024-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	41169
5°	39945
10°	38831
15°	38323
20°	35789
25°	26884
30°	19000
35°	6736
40°	3537
45°	3770
50°	3910
55°	3981
60°	3999
65°	3904
70°	3706
75°	3419
80°	3020
85°	2382

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 57.5°  
 Luminance: 4006 cd/sqm



TEST NUMBER: P757748

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9024-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	34.4	10.3
10°-20°	94.2	28.1
20°-30°	103.8	31.0
30°-40°	39.7	11.8
40°-50°	18.7	5.6
50°-60°	18.6	5.6
60°-70°	14.9	4.4
70°-80°	8.6	2.6
80°-90°	2.3	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	232.4	69.3
0°-40°	272.0	81.2
0°-60°	309.4	92.3
0°-90°	335.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	335.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	377	
5°	364	34
15°	339	94
25°	223	104
35°	50	40
45°	24	19
55°	21	19
65°	15	15
75°	8	9
85°	2	2
90°	0	



TEST NUMBER: P757748

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9024-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	376.8
2.5°	372.9
5°	364.2
7.5°	357.0
10°	350.0
12.5°	344.1
15°	338.8
17.5°	326.0
20°	307.8
22.5°	268.5
25°	223.0
27.5°	194.1
30°	150.6
32.5°	97.3
35°	50.5
37.5°	27.3
40°	24.8
42.5°	24.6
45°	24.4
47.5°	23.9
50°	23.0
52.5°	21.9
55°	20.9
57.5°	19.7
60°	18.3
62.5°	16.8
65°	15.1
67.5°	13.3
70°	11.6
72.5°	9.8
75°	8.1
77.5°	6.4
80°	4.8
82.5°	3.4
85°	1.9
87.5°	0.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)