

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757604

Luminaire Tested: LD6D02D010-EU6DR600210IC9027-6LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757604  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR600210IC9027-6LBDP1H  
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 352.0 lumens  
Efficiency: N/A  
Efficacy: 69.0 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757604

CATALOG NUMBER: LD6D02D010-EU6DR600210IC9027-6LBDP1H

### Luminous Intensity Polar Plot

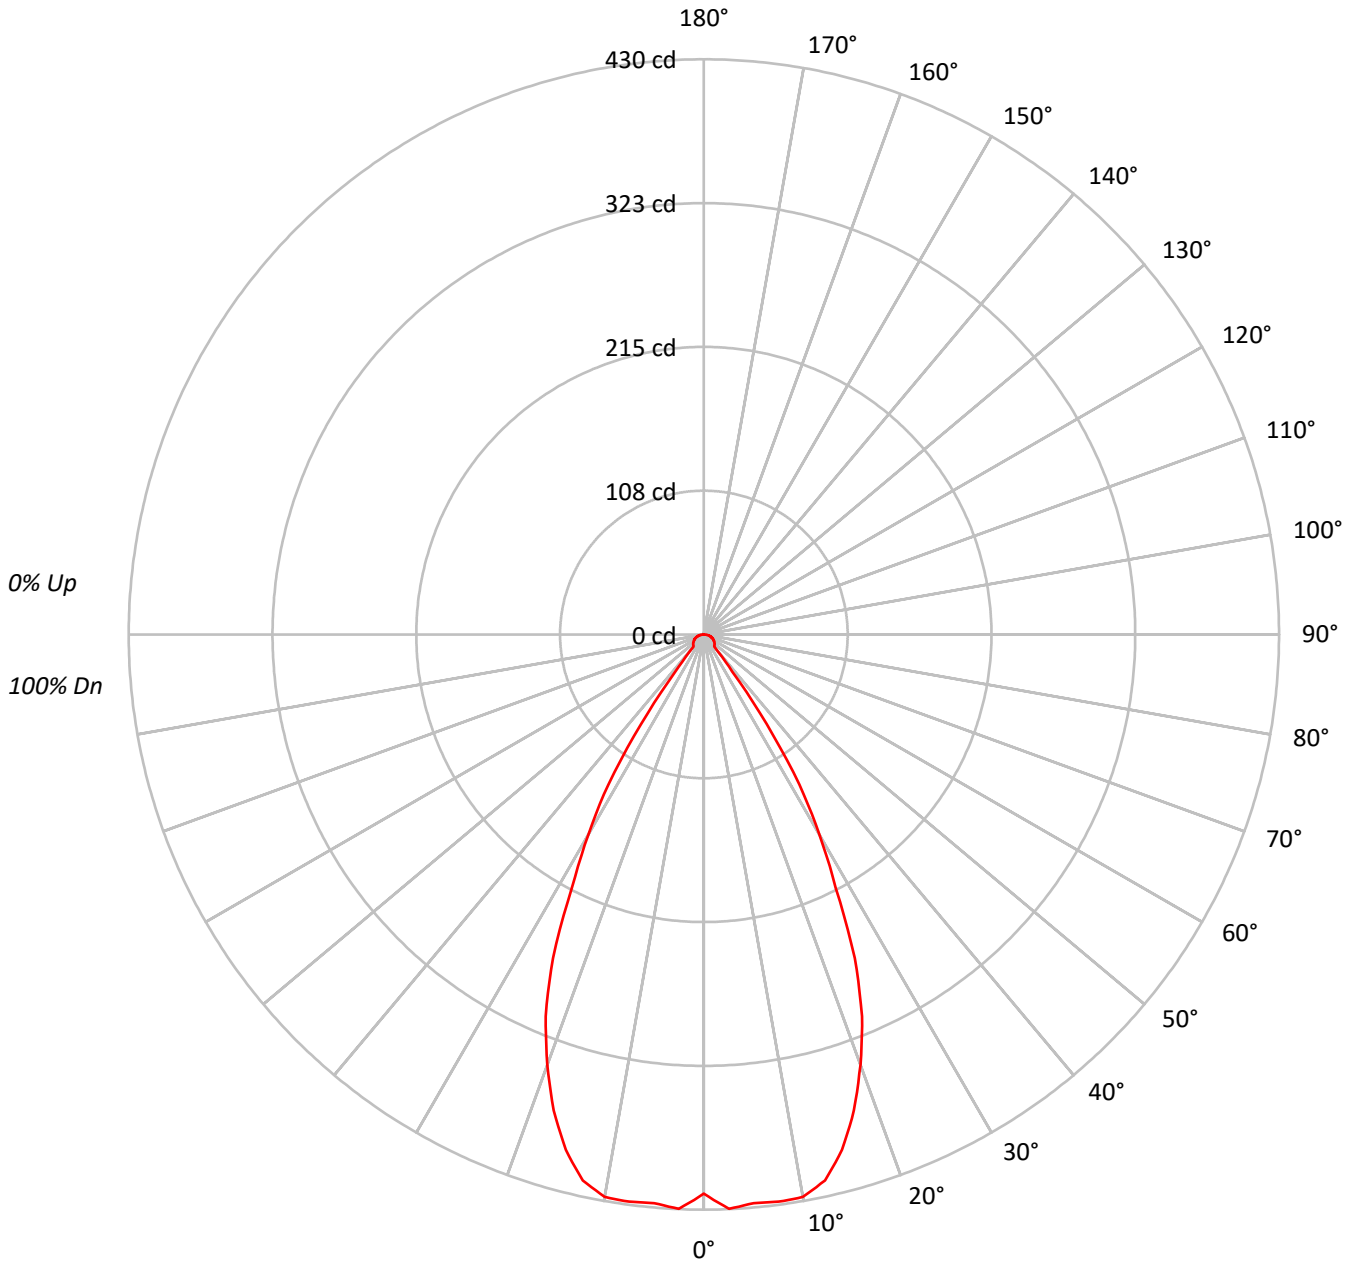



TEST NUMBER: P757604

CATALOG NUMBER: LD6D02D010-EU6DR600210IC9027-6LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |     |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |     |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 110 | 108 | 105 | 111 | 108 | 106 | 104 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 96  | 95  | 93  |    |    | 93  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 107 | 102 | 98  | 95  | 105 | 101 | 97  | 94  | 97  | 94  | 92  | 94  | 92  | 90  | 92  | 90  | 88  | 86  |    |    | 86  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 102 | 96  | 90  | 86  | 100 | 94  | 89  | 86  | 91  | 88  | 84  | 89  | 86  | 83  | 87  | 84  | 82  | 80  |    |    | 80  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 97  | 89  | 84  | 80  | 95  | 88  | 83  | 79  | 86  | 82  | 78  | 84  | 80  | 77  | 82  | 79  | 76  | 75  |    |    | 75  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 92  | 84  | 78  | 74  | 91  | 83  | 78  | 74  | 81  | 77  | 73  | 80  | 76  | 72  | 78  | 75  | 72  | 70  |    |    | 70  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 88  | 79  | 73  | 69  | 87  | 78  | 73  | 69  | 77  | 72  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 66  |    |    | 66  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 84  | 75  | 69  | 65  | 83  | 74  | 68  | 64  | 73  | 68  | 64  | 72  | 67  | 64  | 71  | 67  | 63  | 62  |    |    | 62  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 80  | 71  | 65  | 61  | 79  | 70  | 65  | 61  | 69  | 64  | 60  | 68  | 64  | 60  | 67  | 63  | 60  | 59  |    |    | 59  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 77  | 67  | 61  | 57  | 75  | 67  | 61  | 57  | 66  | 61  | 57  | 65  | 60  | 57  | 64  | 60  | 57  | 55  |    |    | 55  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 73  | 64  | 58  | 54  | 72  | 63  | 58  | 54  | 63  | 58  | 54  | 62  | 57  | 54  | 61  | 57  | 54  | 53  |    |    | 53  |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 45682 |
| 5°  | 46800 |
| 10° | 47374 |
| 15° | 45122 |
| 20° | 39789 |
| 25° | 32176 |
| 30° | 21763 |
| 35° | 10911 |
| 40° | 1769  |
| 45° | 1731  |
| 50° | 1768  |
| 55° | 1791  |
| 60° | 1836  |
| 65° | 1887  |
| 70° | 1917  |
| 75° | 1942  |
| 80° | 1888  |
| 85° | 1630  |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 1942 cd/sqm



TEST NUMBER: P757604

CATALOG NUMBER: LD6D02D010-EU6DR600210IC9027-6LBDP1H

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 40.8   | 11.6      |
| 10°-20°   | 110.3  | 31.3      |
| 20°-30°   | 118.7  | 33.7      |
| 30°-40°   | 51.6   | 14.7      |
| 40°-50°   | 8.7    | 2.5       |
| 50°-60°   | 8.4    | 2.4       |
| 60°-70°   | 7.2    | 2.0       |
| 70°-80°   | 4.8    | 1.4       |
| 80°-90°   | 1.5    | 0.4       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 269.8  | 76.7      |
| 0°-40°    | 321.5  | 91.3      |
| 0°-60°    | 338.5  | 96.2      |
| 0°-90°    | 352.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 352.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 418 |      |
| 5°  | 427 | 41   |
| 15° | 399 | 110  |
| 25° | 267 | 119  |
| 35° | 82  | 52   |
| 45° | 11  | 9    |
| 55° | 9   | 8    |
| 65° | 7   | 7    |
| 75° | 5   | 5    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P757604

CATALOG NUMBER: LD6D02D010-EU6DR600210IC9027-6LBDP1H

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 418.1 |
| 2.5°  | 429.8 |
| 5°    | 426.7 |
| 7.5°  | 427.7 |
| 10°   | 427.0 |
| 12.5° | 418.1 |
| 15°   | 398.9 |
| 17.5° | 373.1 |
| 20°   | 342.2 |
| 22.5° | 309.0 |
| 25°   | 266.9 |
| 27.5° | 213.5 |
| 30°   | 172.5 |
| 32.5° | 133.0 |
| 35°   | 81.8  |
| 37.5° | 35.0  |
| 40°   | 12.4  |
| 42.5° | 11.4  |
| 45°   | 11.2  |
| 47.5° | 10.8  |
| 50°   | 10.4  |
| 52.5° | 9.9   |
| 55°   | 9.4   |
| 57.5° | 8.9   |
| 60°   | 8.4   |
| 62.5° | 7.9   |
| 65°   | 7.3   |
| 67.5° | 6.7   |
| 70°   | 6.0   |
| 72.5° | 5.3   |
| 75°   | 4.6   |
| 77.5° | 3.8   |
| 80°   | 3.0   |
| 82.5° | 2.1   |
| 85°   | 1.3   |
| 87.5° | 0.5   |
| 90°   | 0.0   |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)