

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757760

Luminaire Tested: LD6D02D010-EU6DR700210IC9027-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P757760
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR700210IC9027-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 354.4 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757760
CATALOG NUMBER: LD6D02D010-EU6DR700210IC9027-6LBDP1H

Luminous Intensity Polar Plot

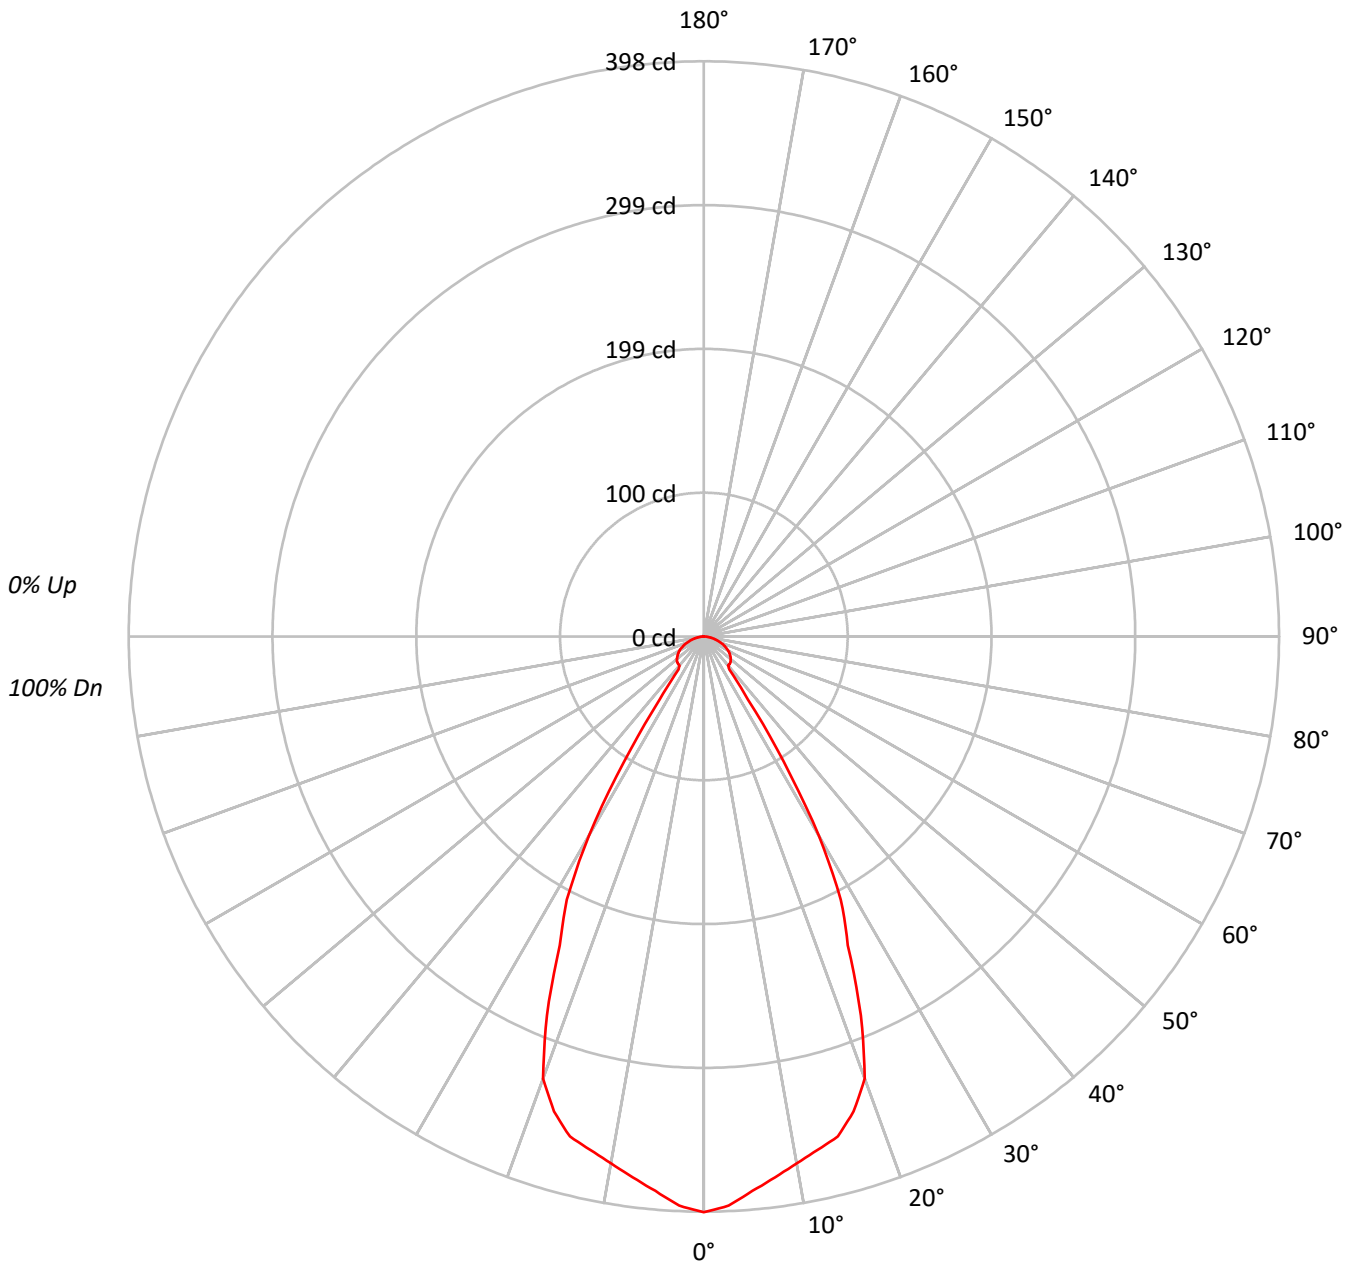



TEST NUMBER: P757760

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9027-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	68	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	43529
5°	42237
10°	41061
15°	40518
20°	37835
25°	28427
30°	20098
35°	7109
40°	3737
45°	3987
50°	4131
55°	4210
60°	4239
65°	4137
70°	3929
75°	3630
80°	3209
85°	2633

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 4239 cd/sqm



TEST NUMBER: P757760

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9027-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	36.3	10.2
10°-20°	99.6	28.1
20°-30°	109.7	31.0
30°-40°	41.9	11.8
40°-50°	19.8	5.6
50°-60°	19.7	5.6
60°-70°	15.8	4.5
70°-80°	9.1	2.6
80°-90°	2.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	245.7	69.3
0°-40°	287.6	81.1
0°-60°	327.0	92.3
0°-90°	354.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	354.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	398	
5°	385	36
15°	358	100
25°	236	110
35°	53	42
45°	26	20
55°	22	20
65°	16	16
75°	9	9
85°	2	2
90°	0	



TEST NUMBER: P757760

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9027-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	398.4
2.5°	394.2
5°	385.1
7.5°	377.4
10°	370.1
12.5°	363.8
15°	358.2
17.5°	344.6
20°	325.4
22.5°	283.9
25°	235.8
27.5°	205.2
30°	159.3
32.5°	102.8
35°	53.3
37.5°	28.8
40°	26.2
42.5°	26.1
45°	25.8
47.5°	25.2
50°	24.3
52.5°	23.2
55°	22.1
57.5°	20.8
60°	19.4
62.5°	17.7
65°	16.0
67.5°	14.2
70°	12.3
72.5°	10.4
75°	8.6
77.5°	6.8
80°	5.1
82.5°	3.6
85°	2.1
87.5°	0.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)