

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757695

Luminaire Tested: LD6D02D010-EU6DR650210IC9030-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P757695
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR650210IC9030-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 317.6 lumens
Efficiency: N/A
Efficacy: 62.3 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757695

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9030-6LBDP1H

Luminous Intensity Polar Plot

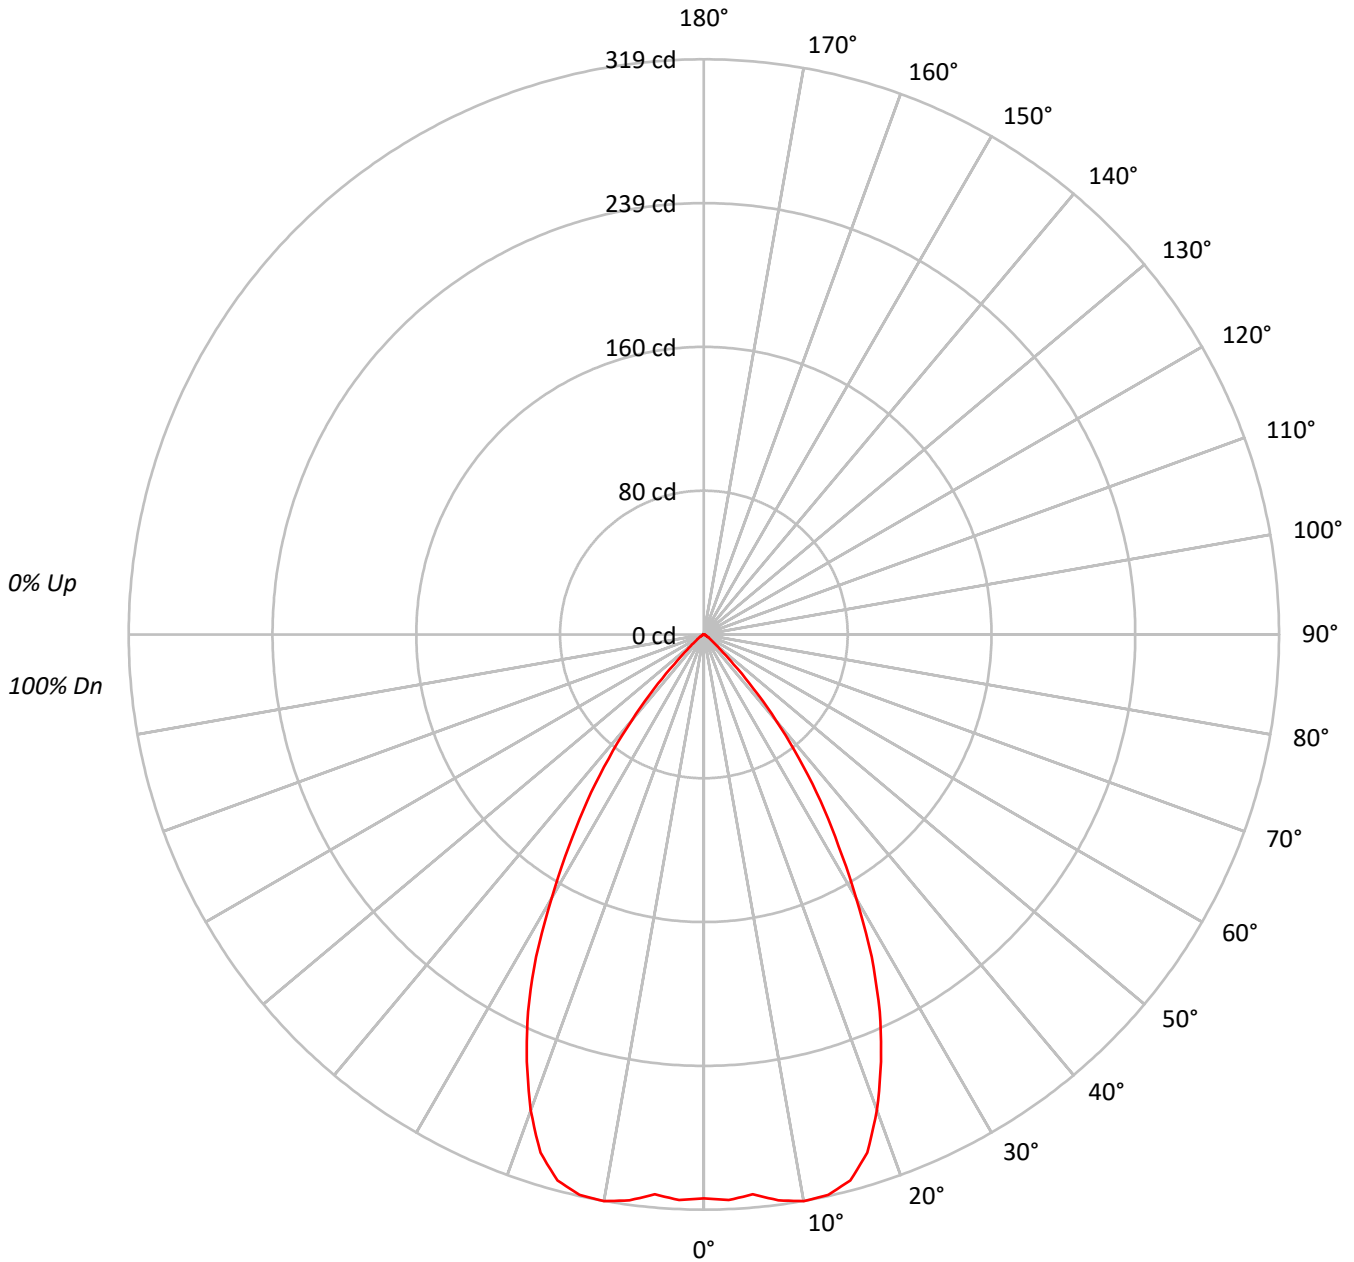



TEST NUMBER: P757695

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9030-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	34166
5°	34187
10°	35403
15°	35462
20°	32638
25°	27812
30°	21296
35°	15046
40°	8886
45°	3600
50°	1309
55°	724
60°	415
65°	233
70°	224
75°	211
80°	189
85°	125

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3600 cd/sqm



TEST NUMBER: P757695

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9030-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.1	9.5
10°-20°	86.9	27.3
20°-30°	104.2	32.8
30°-40°	70.0	22.1
40°-50°	21.0	6.6
50°-60°	3.7	1.2
60°-70°	1.1	0.3
70°-80°	0.5	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	221.2	69.6
0°-40°	291.2	91.7
0°-60°	315.9	99.5
0°-90°	317.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	317.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	313	
5°	312	30
15°	314	87
25°	231	104
35°	113	70
45°	23	21
55°	4	4
65°	1	1
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P757695

CATALOG NUMBER: LD6D02D010-EU6DR650210IC9030-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	312.7
2.5°	314.0
5°	311.7
7.5°	316.5
10°	319.1
12.5°	318.4
15°	313.5
17.5°	301.3
20°	280.7
22.5°	256.6
25°	230.7
27.5°	201.5
30°	168.8
32.5°	139.1
35°	112.8
37.5°	86.8
40°	62.3
42.5°	40.7
45°	23.3
47.5°	12.4
50°	7.7
52.5°	5.3
55°	3.8
57.5°	2.8
60°	1.9
62.5°	1.3
65°	0.9
67.5°	0.8
70°	0.7
72.5°	0.6
75°	0.5
77.5°	0.4
80°	0.3
82.5°	0.2
85°	0.1
87.5°	0.1
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)