

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757773

Luminaire Tested: LD6D02D010-EU6DR700210IC9030-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P757773
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D02D010-EU6DR700210IC9030-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 365.9 lumens
Efficiency: N/A
Efficacy: 71.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P757773

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBDP1H

Luminous Intensity Polar Plot

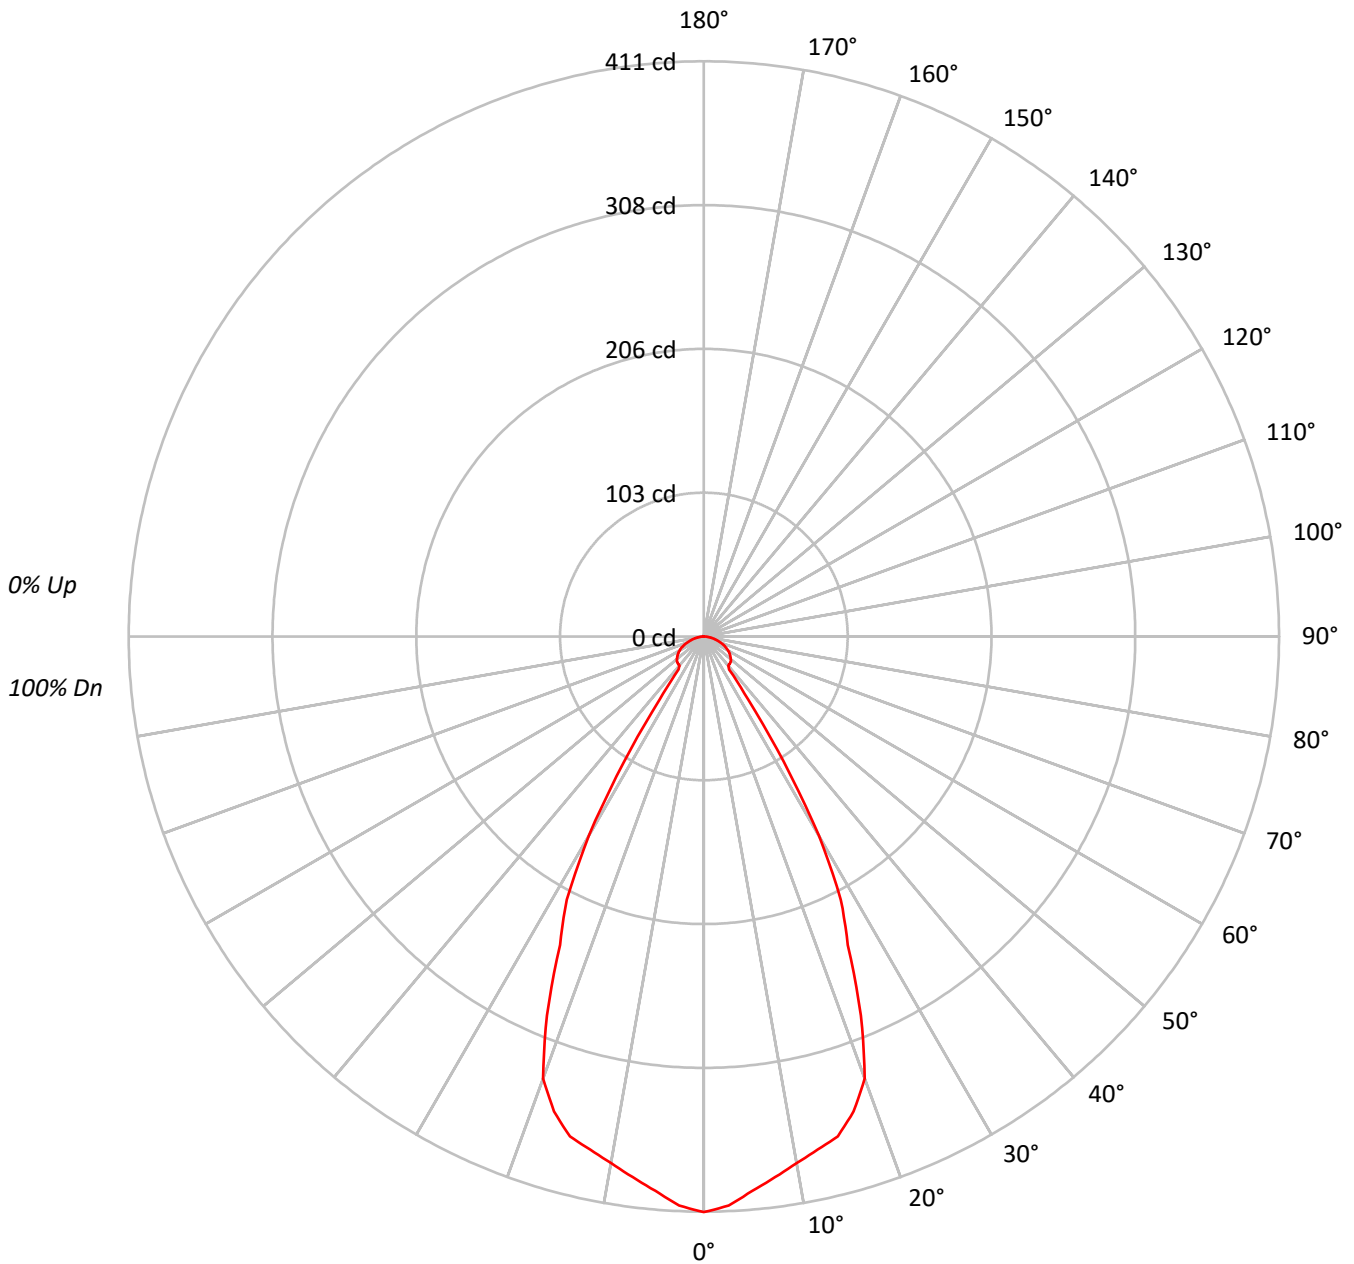



TEST NUMBER: P757773

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	68	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	44939
5°	43608
10°	42393
15°	41830
20°	39068
25°	29343
30°	20741
35°	7349
40°	3865
45°	4110
50°	4266
55°	4343
60°	4370
65°	4292
70°	4057
75°	3757
80°	3335
85°	2758

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 4372 cd/sqm



TEST NUMBER: P757773

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	37.5	10.2
10°-20°	102.9	28.1
20°-30°	113.3	31.0
30°-40°	43.3	11.8
40°-50°	20.4	5.6
50°-60°	20.3	5.6
60°-70°	16.3	4.5
70°-80°	9.4	2.6
80°-90°	2.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	253.6	69.3
0°-40°	296.9	81.1
0°-60°	337.7	92.3
0°-90°	365.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	365.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	411	
5°	398	38
15°	370	103
25°	243	113
35°	55	43
45°	27	20
55°	23	20
65°	17	16
75°	9	9
85°	2	3
90°	0	



TEST NUMBER: P757773

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9030-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	411.3
2.5°	407.0
5°	397.6
7.5°	389.7
10°	382.1
12.5°	375.6
15°	369.8
17.5°	355.9
20°	336.0
22.5°	293.1
25°	243.4
27.5°	211.9
30°	164.4
32.5°	106.2
35°	55.1
37.5°	29.7
40°	27.1
42.5°	26.9
45°	26.6
47.5°	26.1
50°	25.1
52.5°	23.9
55°	22.8
57.5°	21.5
60°	20.0
62.5°	18.3
65°	16.6
67.5°	14.6
70°	12.7
72.5°	10.7
75°	8.9
77.5°	7.0
80°	5.3
82.5°	3.7
85°	2.2
87.5°	0.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)