

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P756929

Luminaire Tested: LD6D02D010-EU6DR150210IC9035-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P756929  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR150210IC9035-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 405.7 lumens  
Efficiency: N/A  
Efficacy: 79.6 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P756929

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9035-6LBDP1LI

### Luminous Intensity Polar Plot

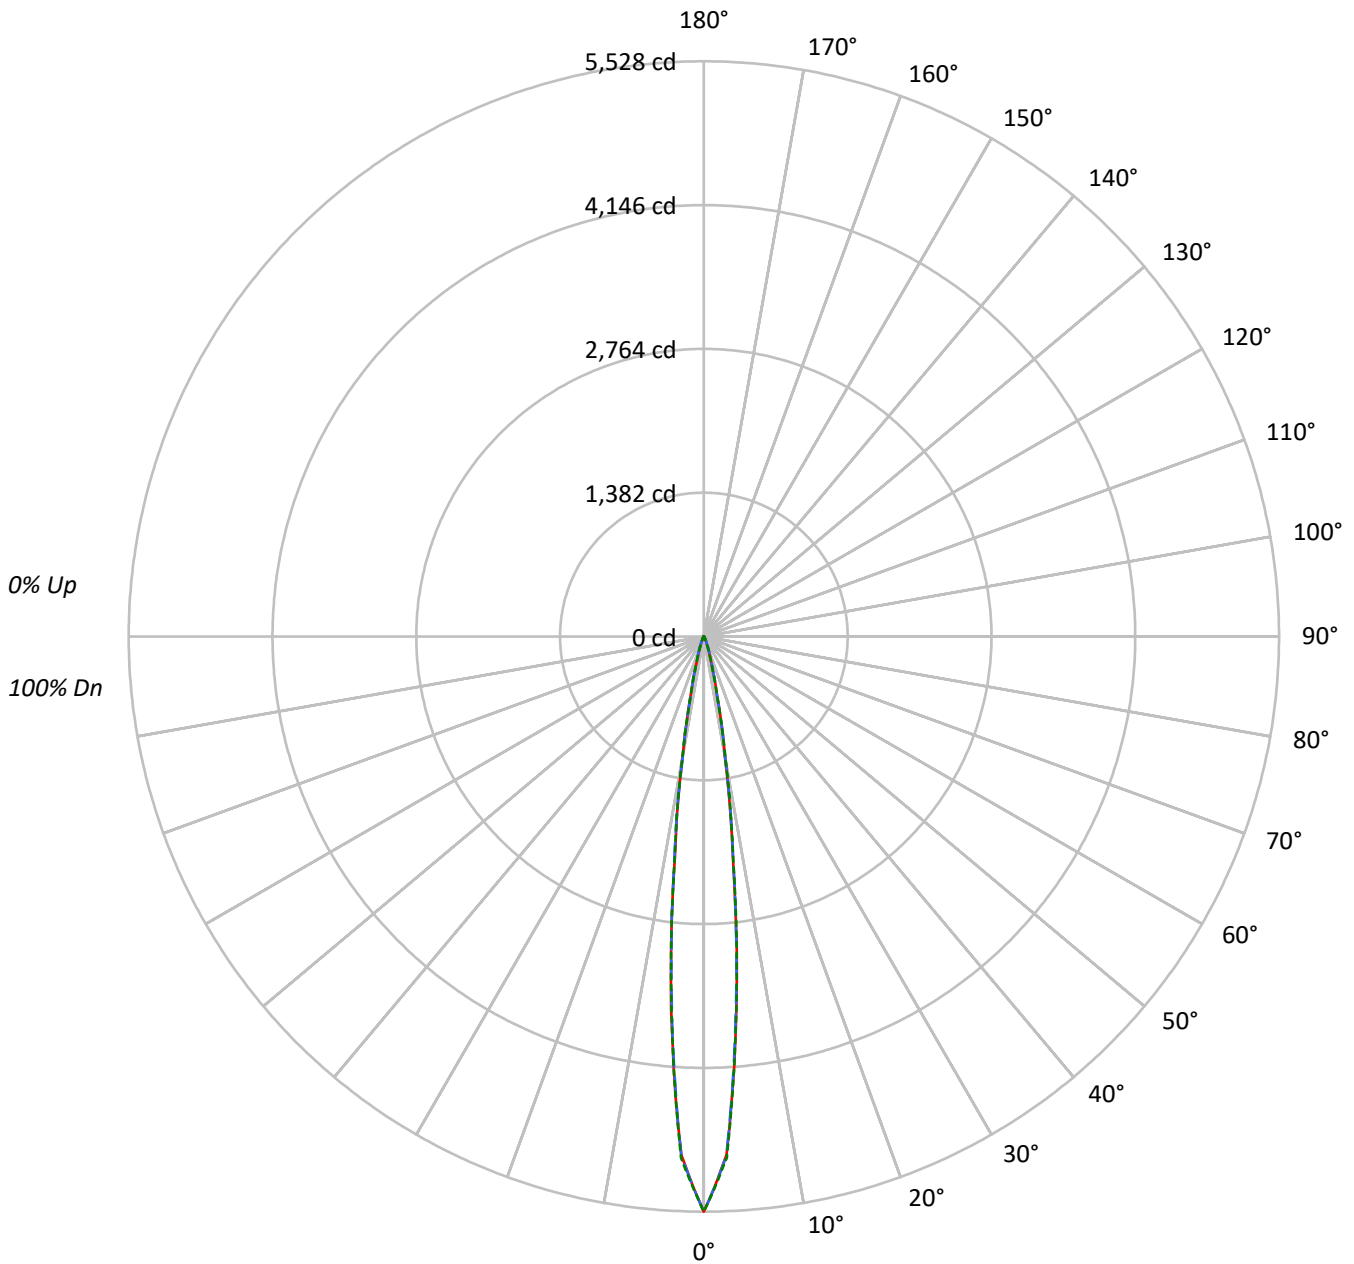



TEST NUMBER: P756929

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9035-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	622055	622055	622055
5°	365549	360813	363669
10°	109095	109860	111549
15°	27134	27664	26813
20°	8117	9401	8289
25°	2859	3646	2898
30°	1048	1385	1071
35°	530	595	508
40°	334	362	334
45°	245	259	245
50°	195	195	195
55°	160	160	160
60°	133	133	133
65°	100	100	100
70°	88	88	88
75°	53	53	68
80°	39	39	39
85°	17	17	17

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 259 cd/sqm



TEST NUMBER: P756929

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9035-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	263.2	64.9
10°-20°	108.2	26.7
20°-30°	21.5	5.3
30°-40°	5.4	1.3
40°-50°	2.8	0.7
50°-60°	2.1	0.5
60°-70°	1.5	0.4
70°-80°	0.8	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	392.9	96.8
0°-40°	398.3	98.2
0°-60°	403.2	99.4
0°-90°	405.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	405.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	5528	5528	5528	5528	5528	
5°	3597	3560	3550	3575	3578	263
15°	312	318	318	313	309	107
25°	37	42	47	41	37	19
35°	7	8	8	8	7	5
45°	4	4	4	4	4	3
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P756929

CATALOG NUMBER: LD6D02D010-EU6DR150210IC9035-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	5528.4	5528.4	5528.4	5528.4	5528.4
2.5°	4986.9	4991.1	4992.7	4997.6	5015.9
5°	3596.9	3559.9	3550.3	3574.9	3578.4
7.5°	2130.7	2138.2	2165.5	2171.6	2149.6
10°	1169.2	1178.8	1177.4	1185.9	1195.5
12.5°	598.0	590.5	588.1	597.7	584.4
15°	312.4	318.3	318.5	312.9	308.7
17.5°	168.0	174.8	186.1	176.9	162.9
20°	99.2	105.3	114.9	107.4	101.3
22.5°	61.3	66.2	73.0	67.2	62.3
25°	36.7	41.7	46.8	41.4	37.2
27.5°	21.8	26.0	29.3	25.7	21.5
30°	14.0	16.4	18.5	16.1	14.3
32.5°	9.8	10.8	11.7	10.8	9.8
35°	7.3	7.7	8.2	7.7	7.0
37.5°	5.6	6.1	6.3	5.9	5.4
40°	4.7	4.9	5.1	4.9	4.7
42.5°	4.0	4.2	4.2	4.2	4.0
45°	3.5	3.5	3.7	3.5	3.5
47.5°	3.0	3.0	3.3	3.0	3.0
50°	2.8	2.8	2.8	2.8	2.8
52.5°	2.6	2.6	2.6	2.6	2.6
55°	2.3	2.3	2.3	2.3	2.3
57.5°	2.1	2.1	2.1	2.1	2.1
60°	1.9	1.9	1.9	1.9	1.9
62.5°	1.6	1.6	1.6	1.6	1.6
65°	1.4	1.4	1.4	1.4	1.4
67.5°	1.4	1.4	1.4	1.4	1.4
70°	1.2	1.2	1.2	1.2	1.2
72.5°	0.9	0.9	0.9	0.9	0.9
75°	0.7	0.7	0.7	0.7	0.9
77.5°	0.7	0.7	0.7	0.7	0.7
80°	0.5	0.5	0.5	0.5	0.5
82.5°	0.5	0.5	0.5	0.5	0.5
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)