

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P757788

Luminaire Tested: LD6D02D010-EU6DR700210IC9035-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P757788  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D02D010-EU6DR700210IC9035-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 301.6 lumens  
Efficiency: N/A  
Efficacy: 59.1 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P757788

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9035-6LBDP1MW

### Luminous Intensity Polar Plot

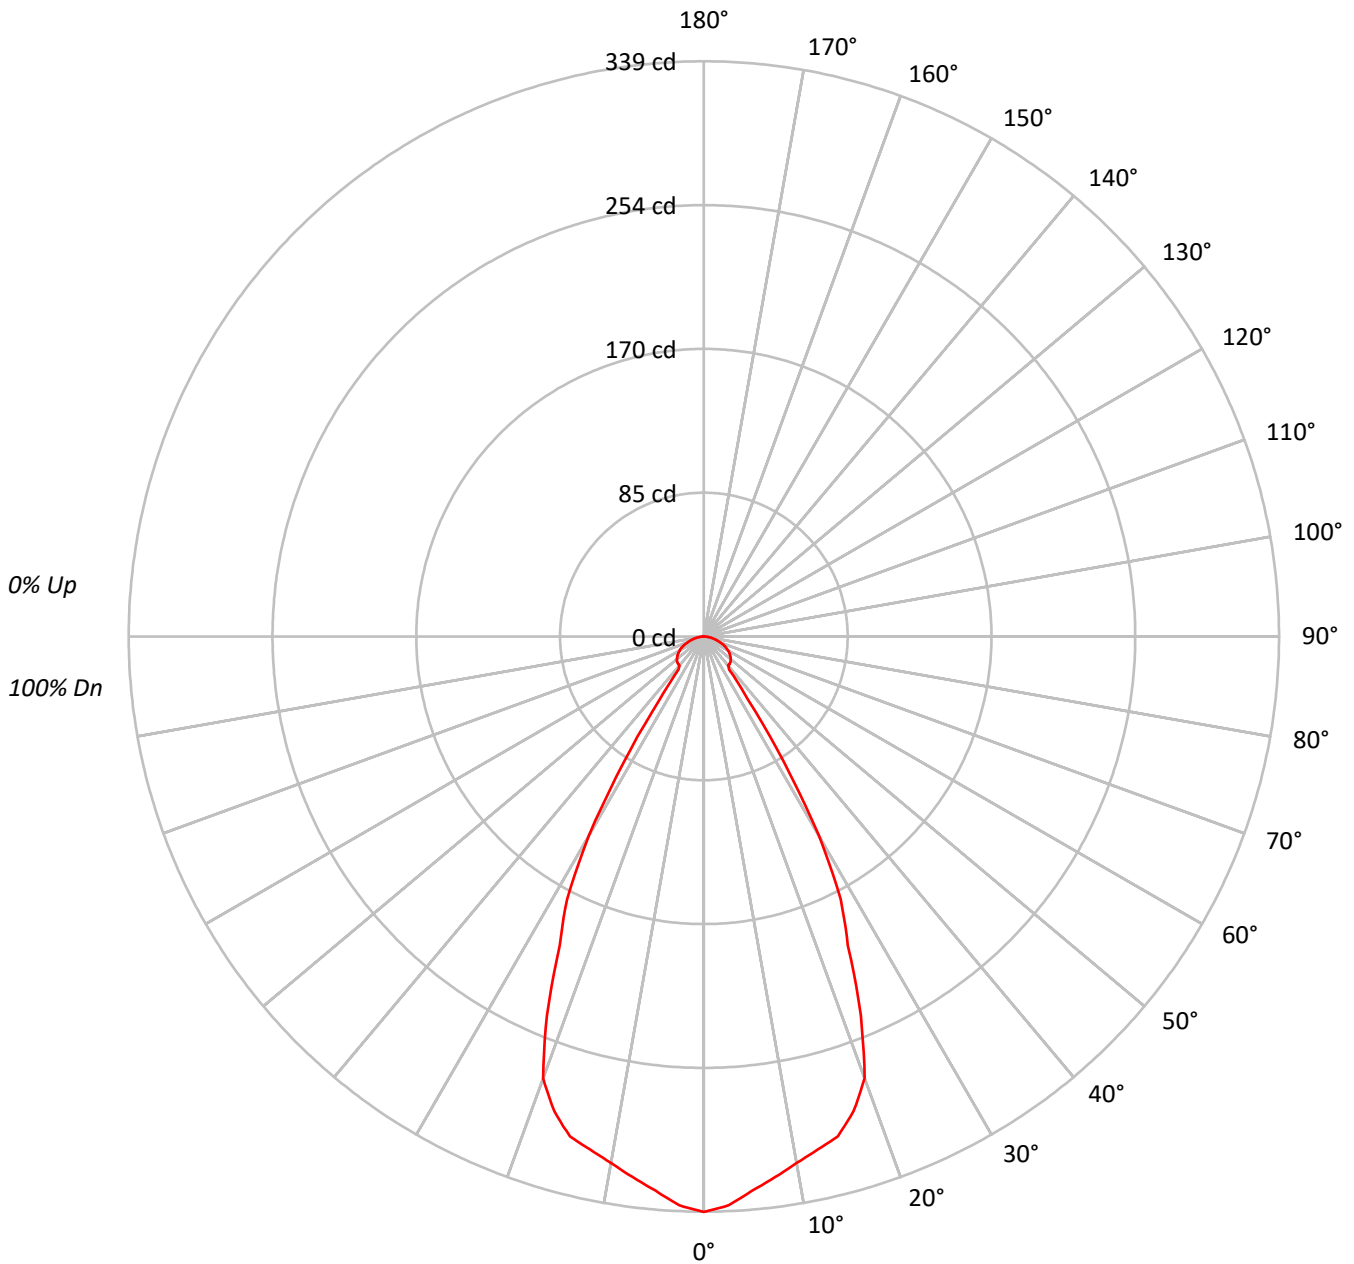



TEST NUMBER: P757788

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9035-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	88	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	37061
5°	35952
10°	34959
15°	34500
20°	32208
25°	24208
30°	17108
35°	6056
40°	3181
45°	3384
50°	3519
55°	3581
60°	3606
65°	3516
70°	3322
75°	3082
80°	2769
85°	2257

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 60°  
 Luminance: 3606 cd/sqm



TEST NUMBER: P757788

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9035-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.9	10.3
10°-20°	84.8	28.1
20°-30°	93.4	31.0
30°-40°	35.7	11.8
40°-50°	16.8	5.6
50°-60°	16.8	5.6
60°-70°	13.4	4.4
70°-80°	7.7	2.6
80°-90°	2.1	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	209.2	69.3
0°-40°	244.8	81.2
0°-60°	278.4	92.3
0°-90°	301.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	301.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	339	
5°	328	31
15°	305	85
25°	201	93
35°	45	36
45°	22	17
55°	19	17
65°	14	13
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P757788

CATALOG NUMBER: LD6D02D010-EU6DR700210IC9035-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	339.2
2.5°	335.6
5°	327.8
7.5°	321.4
10°	315.1
12.5°	309.7
15°	305.0
17.5°	293.4
20°	277.0
22.5°	241.7
25°	200.8
27.5°	174.7
30°	135.6
32.5°	87.6
35°	45.4
37.5°	24.5
40°	22.3
42.5°	22.2
45°	21.9
47.5°	21.5
50°	20.7
52.5°	19.8
55°	18.8
57.5°	17.7
60°	16.5
62.5°	15.1
65°	13.6
67.5°	12.0
70°	10.4
72.5°	8.8
75°	7.3
77.5°	5.7
80°	4.4
82.5°	3.0
85°	1.8
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)