

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P762953

Luminaire Tested: LD6D25D010-EU6DR2015309027-6LBDP1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P762953  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D25D010-EU6DR2015309027-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2494.5 lumens  
Efficiency: N/A  
Efficacy: 99.4 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P762953

CATALOG NUMBER: LD6D25D010-EU6DR2015309027-6LBDP1B

### Luminous Intensity Polar Plot

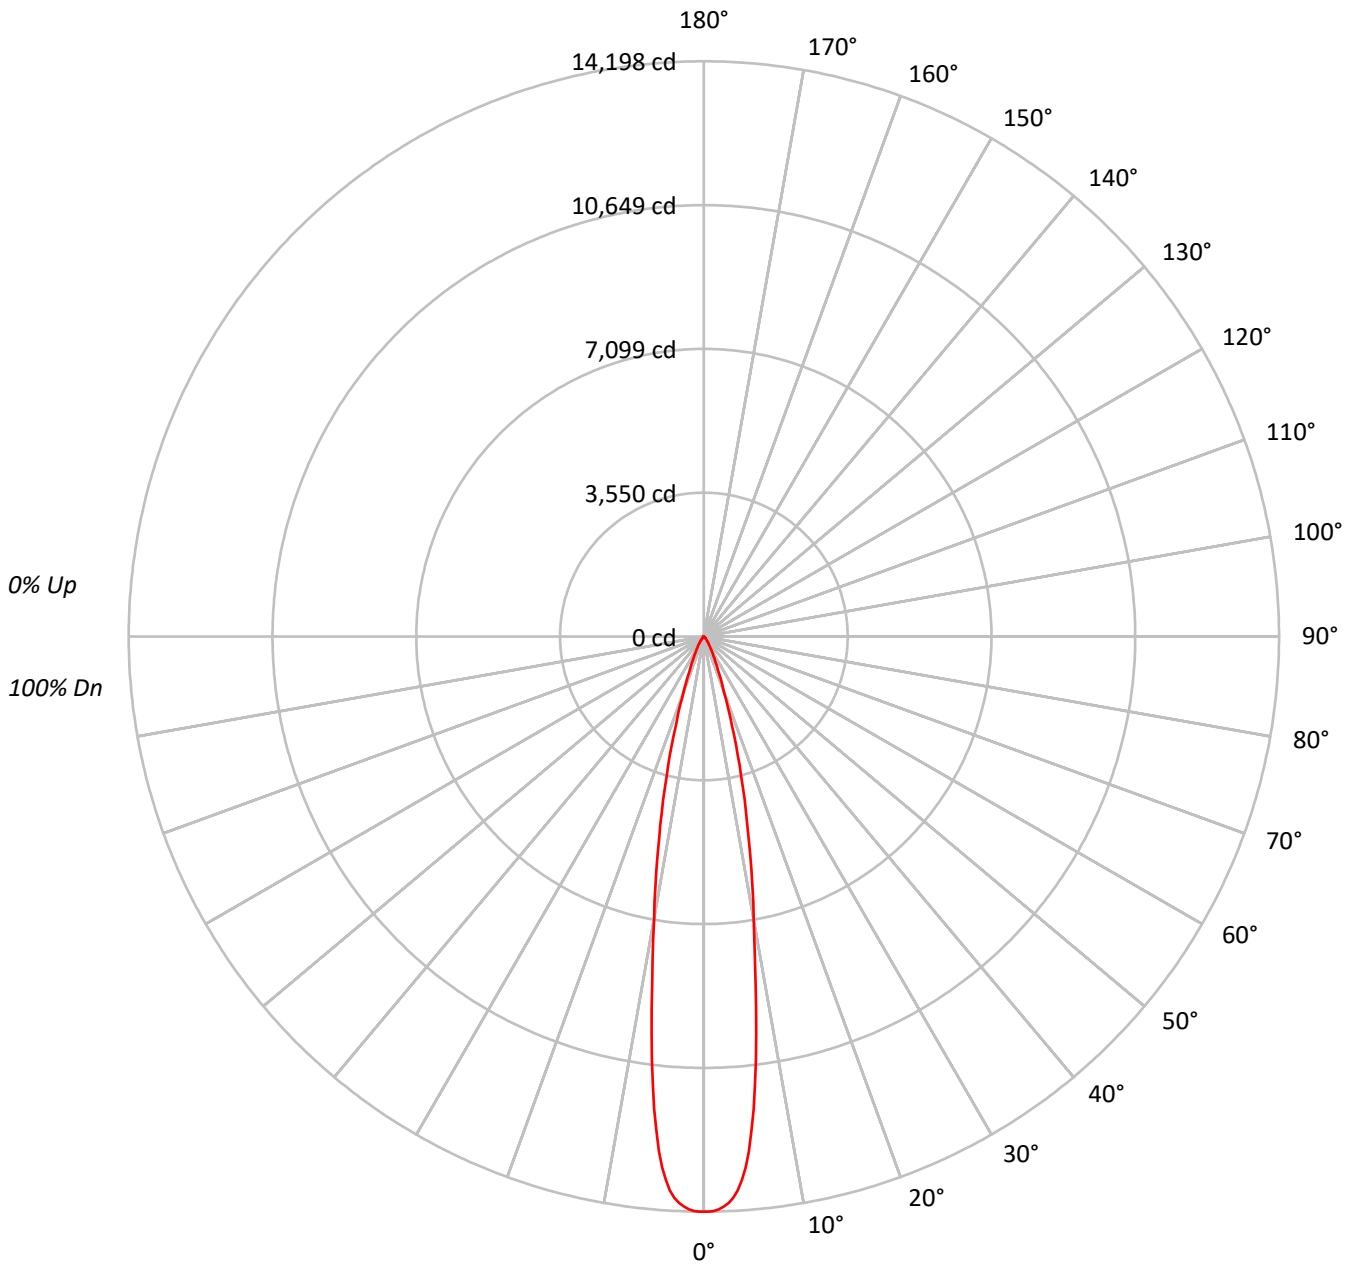



TEST NUMBER: P762953

CATALOG NUMBER: LD6D25D010-EU6DR2015309027-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	100	99	98	97	98	96	95	94												
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	98	96	95	94	93	92	91	94												
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	98	96	95	94	93	92	91	94												
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	98	96	95	94	93	92	91	88												
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	98	96	95	94	93	92	91	85												
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	98	96	95	94	93	92	91	83												
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	98	96	95	94	93	92	91	81												
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	98	96	95	94	93	92	91	79												
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	98	96	95	94	93	92	91	77												
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	98	96	95	94	93	92	91	75												

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1551295
5°	1399559
10°	785511
15°	399285
20°	169049
25°	78036
30°	41319
35°	22262
40°	11895
45°	7031
50°	4080
55°	2172
60°	1377
65°	982
70°	415
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7031 cd/sqm



TEST NUMBER: P762953

CATALOG NUMBER: LD6D25D010-EU6DR2015309027-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1010.9	40.5
10°-20°	995.4	39.9
20°-30°	325.2	13.0
30°-40°	110.7	4.4
40°-50°	37.2	1.5
50°-60°	11.2	0.4
60°-70°	3.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2331.4	93.5
0°-40°	2442.2	97.9
0°-60°	2490.6	99.8
0°-90°	2494.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2494.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	14198	
5°	12761	###
15°	3530	995
25°	647	325
35°	167	111
45°	46	37
55°	11	11
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P762953

CATALOG NUMBER: LD6D25D010-EU6DR2015309027-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	14198.1
0.5°	14198.1
1°	14180.4
1.5°	14145.0
2°	14080.5
2.5°	13994.5
3°	13873.1
3.5°	13703.7
4°	13452.1
4.5°	13146.2
5°	12760.6
5.5°	12253.6
6°	11733.9
6.5°	11138.5
7°	10555.6
7.5°	9872.9
8°	9263.5
8.5°	8650.3
9°	8083.9
9.5°	7564.3
10°	7080.1
12.5°	5083.7
15°	3529.9
17.5°	2306.1
20°	1453.9
22.5°	941.9
25°	647.3
27.5°	455.1
30°	327.5
32.5°	235.2
35°	166.9
37.5°	116.3
40°	83.4
42.5°	60.7
45°	45.5
47.5°	35.4
50°	24.0
52.5°	15.2
55°	11.4
57.5°	8.9
60°	6.3
62.5°	5.1
65°	3.8



TEST NUMBER: P762953  
CATALOG NUMBER: LD6D25D010-EU6DR2015309027-6LBDP1B

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.5
70°		1.3

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)