

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P762970

Luminaire Tested: LD6D25D010-EU6DR2015309030-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P762970
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D25D010-EU6DR2015309030-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2959.7 lumens
Efficiency: N/A
Efficacy: 117.9 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P762970
CATALOG NUMBER: LD6D25D010-EU6DR2015309030-6LBS1B

Luminous Intensity Polar Plot

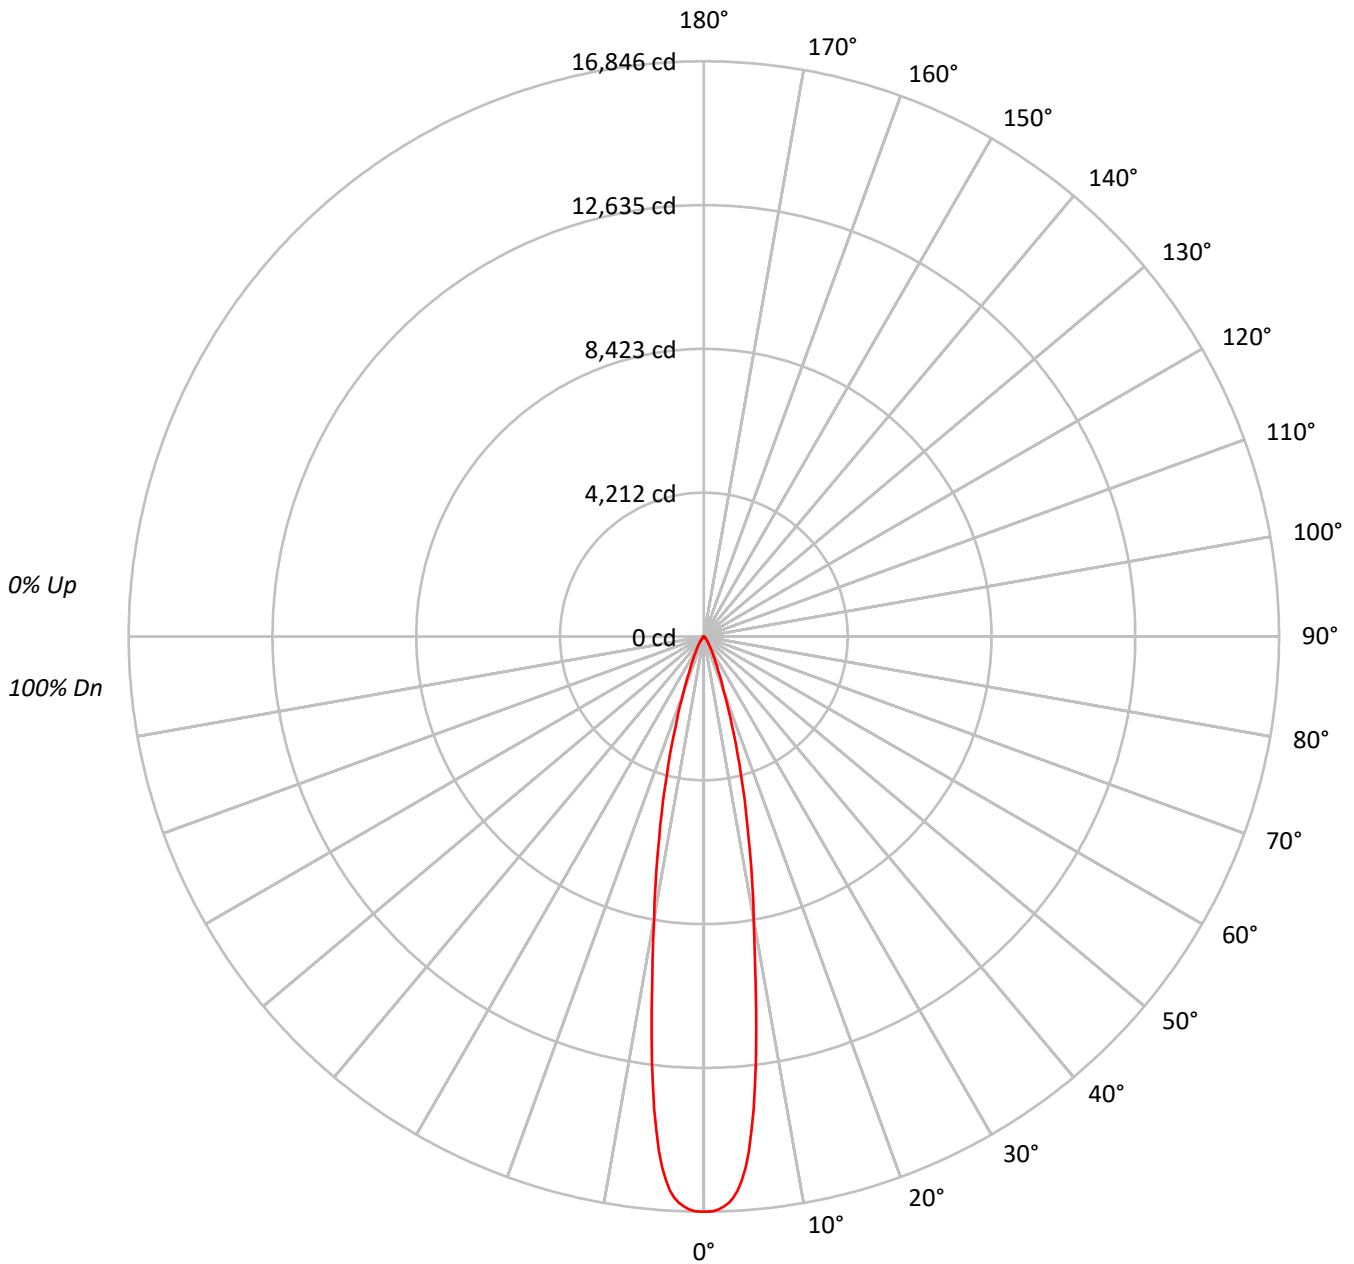



TEST NUMBER: P762970

CATALOG NUMBER: LD6D25D010-EU6DR2015309030-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	98	96	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	95	93	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	93	91	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	91	88	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	88	86	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	86	84	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	84	82	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	82	80	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	81	78	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1840618
5°	1660581
10°	932015
15°	473760
20°	200582
25°	92599
30°	49015
35°	26410
40°	14120
45°	8344
50°	4844
55°	2572
60°	1639
65°	1163
70°	479
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 8344 cd/sqm



TEST NUMBER: P762970

CATALOG NUMBER: LD6D25D010-EU6DR2015309030-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1199.4	40.5
10°-20°	1181.0	39.9
20°-30°	385.8	13.0
30°-40°	131.4	4.4
40°-50°	44.2	1.5
50°-60°	13.3	0.4
60°-70°	4.4	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2766.3	93.5
0°-40°	2897.6	97.9
0°-60°	2955.1	99.8
0°-90°	2959.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2959.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	16846	
5°	15140	###
15°	4188	1181
25°	768	386
35°	198	131
45°	54	44
55°	14	13
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P762970

CATALOG NUMBER: LD6D25D010-EU6DR2015309030-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	16846.1
0.5°	16846.1
1°	16825.1
1.5°	16783.1
2°	16706.6
2.5°	16604.6
3°	16460.6
3.5°	16259.6
4°	15961.1
4.5°	15598.1
5°	15140.5
5.5°	14539.0
6°	13922.4
6.5°	13215.9
7°	12524.3
7.5°	11714.3
8°	10991.2
8.5°	10263.7
9°	9591.6
9.5°	8975.1
10°	8400.6
12.5°	6031.9
15°	4188.3
17.5°	2736.2
20°	1725.1
22.5°	1117.6
25°	768.1
27.5°	540.0
30°	388.5
32.5°	279.0
35°	198.0
37.5°	138.0
40°	99.0
42.5°	72.0
45°	54.0
47.5°	42.0
50°	28.5
52.5°	18.0
55°	13.5
57.5°	10.5
60°	7.5
62.5°	6.0
65°	4.5



TEST NUMBER: P762970
CATALOG NUMBER: LD6D25D010-EU6DR2015309030-6LBS1B

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		3.0
70°		1.5

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)