

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P767009

Luminaire Tested: LD6D45BD010-EU6DR7040509027-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P767009
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D45BD010-EU6DR7040509027-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2795.5 lumens
Efficiency: N/A
Efficacy: 72.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P767009
CATALOG NUMBER: LD6D45BD010-EU6DR7040509027-6LBDP1B

Luminous Intensity Polar Plot

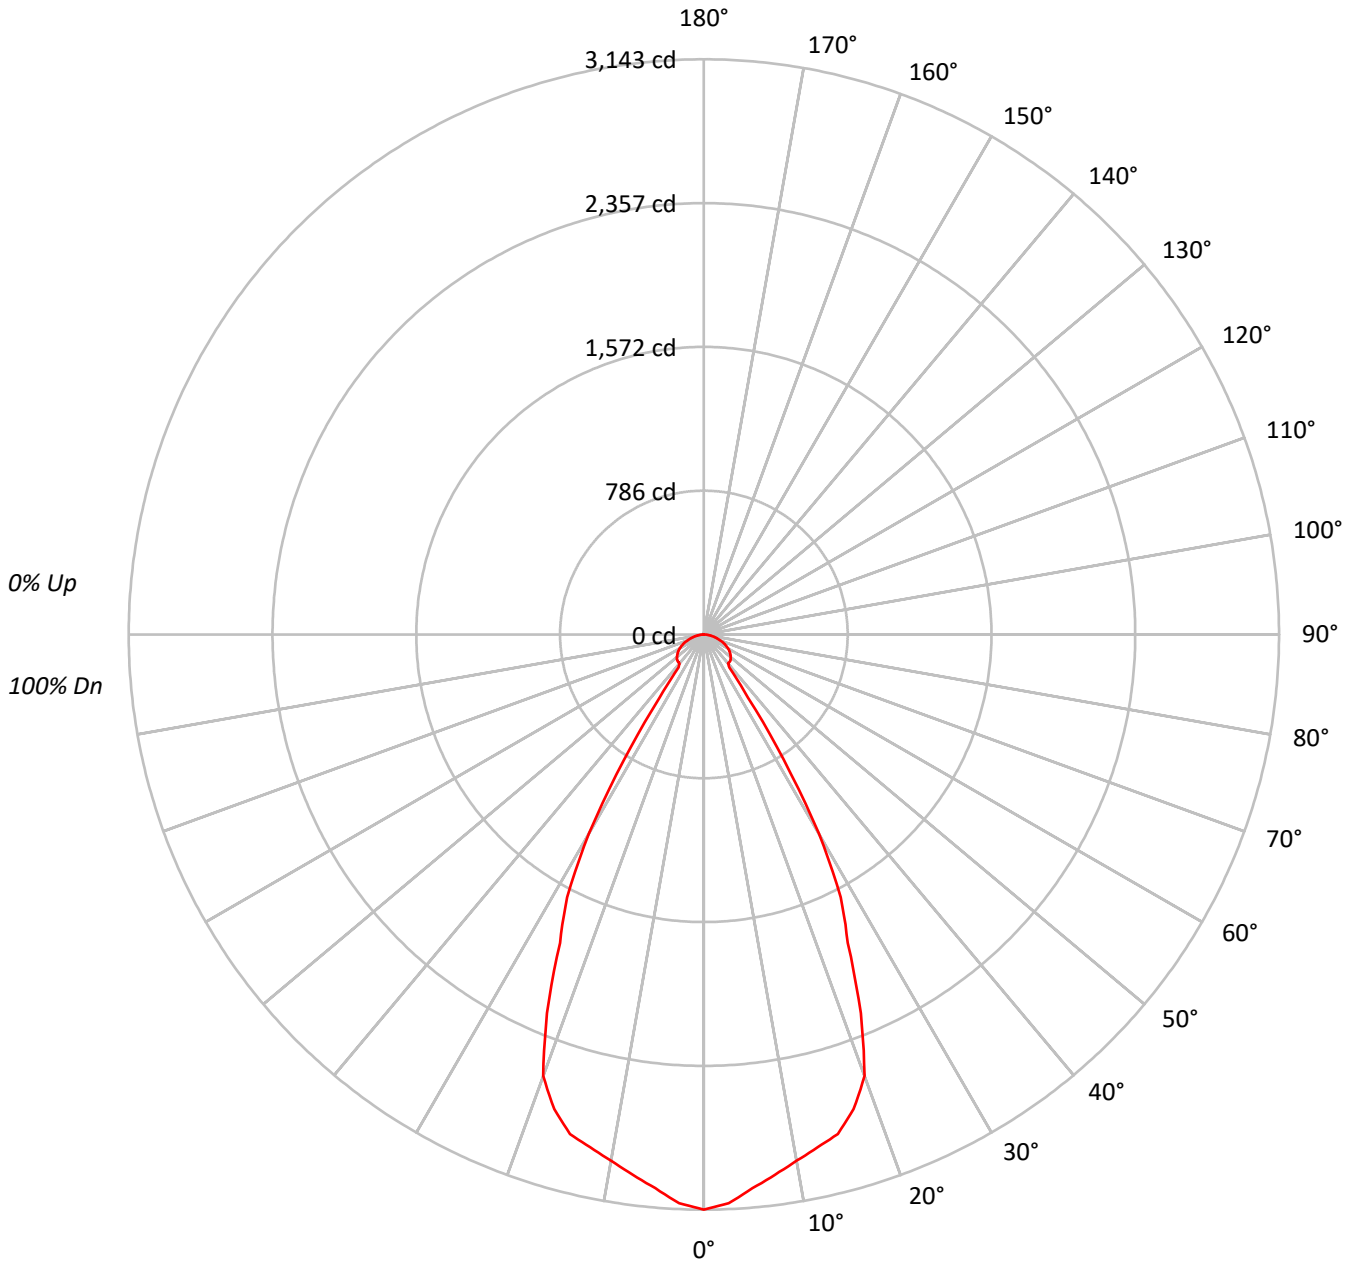



TEST NUMBER: P767009

CATALOG NUMBER: LD6D45BD010-EU6DR7040509027-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 97 | 96 | 95 | 94 | 93 | 91 | | | |
| 2 | 106 | 100 | 95 | 91 | 103 | 98 | 94 | 90 | 95 | 91 | 88 | 92 | 89 | 86 | 89 | 87 | 85 | 83 | | | |
| 3 | 100 | 92 | 87 | 82 | 98 | 91 | 86 | 81 | 88 | 84 | 80 | 86 | 82 | 79 | 83 | 80 | 78 | 76 | | | |
| 4 | 94 | 86 | 80 | 75 | 92 | 85 | 79 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 78 | 75 | 72 | 70 | | | |
| 5 | 89 | 80 | 74 | 69 | 87 | 79 | 73 | 69 | 77 | 72 | 68 | 75 | 71 | 67 | 74 | 70 | 67 | 65 | | | |
| 6 | 85 | 75 | 68 | 64 | 83 | 74 | 68 | 64 | 73 | 67 | 63 | 71 | 66 | 63 | 70 | 66 | 62 | 61 | | | |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | |
| 8 | 77 | 66 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 59 | 55 | 64 | 59 | 55 | 63 | 58 | 55 | 53 | | | |
| 9 | 73 | 63 | 57 | 52 | 72 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 60 | 55 | 52 | 50 | | | |
| 10 | 70 | 59 | 53 | 49 | 69 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 49 | 57 | 52 | 49 | 48 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | 0° |
|-----|--------|
| 0° | 343396 |
| 5° | 333191 |
| 10° | 323908 |
| 15° | 319652 |
| 20° | 298496 |
| 25° | 224246 |
| 30° | 158524 |
| 35° | 56154 |
| 40° | 29524 |
| 45° | 31444 |
| 50° | 32568 |
| 55° | 33183 |
| 60° | 33390 |
| 65° | 32679 |
| 70° | 30828 |
| 75° | 28580 |
| 80° | 25357 |
| 85° | 20559 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 33390 cd/sqm



TEST NUMBER: P767009

CATALOG NUMBER: LD6D45BD010-EU6DR7040509027-6LBDP1B

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 286.5 | 10.3 |
| 10°-20° | 786.0 | 28.1 |
| 20°-30° | 865.6 | 31.0 |
| 30°-40° | 330.7 | 11.8 |
| 40°-50° | 156.2 | 5.6 |
| 50°-60° | 155.3 | 5.6 |
| 60°-70° | 124.3 | 4.4 |
| 70°-80° | 71.4 | 2.6 |
| 80°-90° | 19.4 | 0.7 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1938.2 | 69.3 |
| 0°-40° | 2268.9 | 81.2 |
| 0°-60° | 2580.3 | 92.3 |
| 0°-90° | 2795.5 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 2795.5 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 3143 | |
| 5° | 3038 | 287 |
| 15° | 2826 | 786 |
| 25° | 1860 | 866 |
| 35° | 421 | 331 |
| 45° | 204 | 156 |
| 55° | 174 | 155 |
| 65° | 126 | 124 |
| 75° | 68 | 71 |
| 85° | 16 | 19 |
| 90° | 0 | |



TEST NUMBER: P767009

CATALOG NUMBER: LD6D45BD010-EU6DR7040509027-6LBDP1B

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 3142.9 |
| 2.5° | 3110.1 |
| 5° | 3037.9 |
| 7.5° | 2977.7 |
| 10° | 2919.5 |
| 12.5° | 2870.2 |
| 15° | 2825.9 |
| 17.5° | 2719.0 |
| 20° | 2567.2 |
| 22.5° | 2239.8 |
| 25° | 1860.1 |
| 27.5° | 1619.2 |
| 30° | 1256.5 |
| 32.5° | 811.6 |
| 35° | 421.0 |
| 37.5° | 227.4 |
| 40° | 207.0 |
| 42.5° | 205.5 |
| 45° | 203.5 |
| 47.5° | 199.0 |
| 50° | 191.6 |
| 52.5° | 183.1 |
| 55° | 174.2 |
| 57.5° | 164.2 |
| 60° | 152.8 |
| 62.5° | 139.8 |
| 65° | 126.4 |
| 67.5° | 111.5 |
| 70° | 96.5 |
| 72.5° | 81.6 |
| 75° | 67.7 |
| 77.5° | 53.2 |
| 80° | 40.3 |
| 82.5° | 28.4 |
| 85° | 16.4 |
| 87.5° | 6.5 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)