

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P766505

Luminaire Tested: LD6D45BD010-EU6DR3540509040-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P766505
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D45BD010-EU6DR3540509040-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4646.0 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 38.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P766505
CATALOG NUMBER: LD6D45BD010-EU6DR3540509040-6LBDP1MW

Luminous Intensity Polar Plot

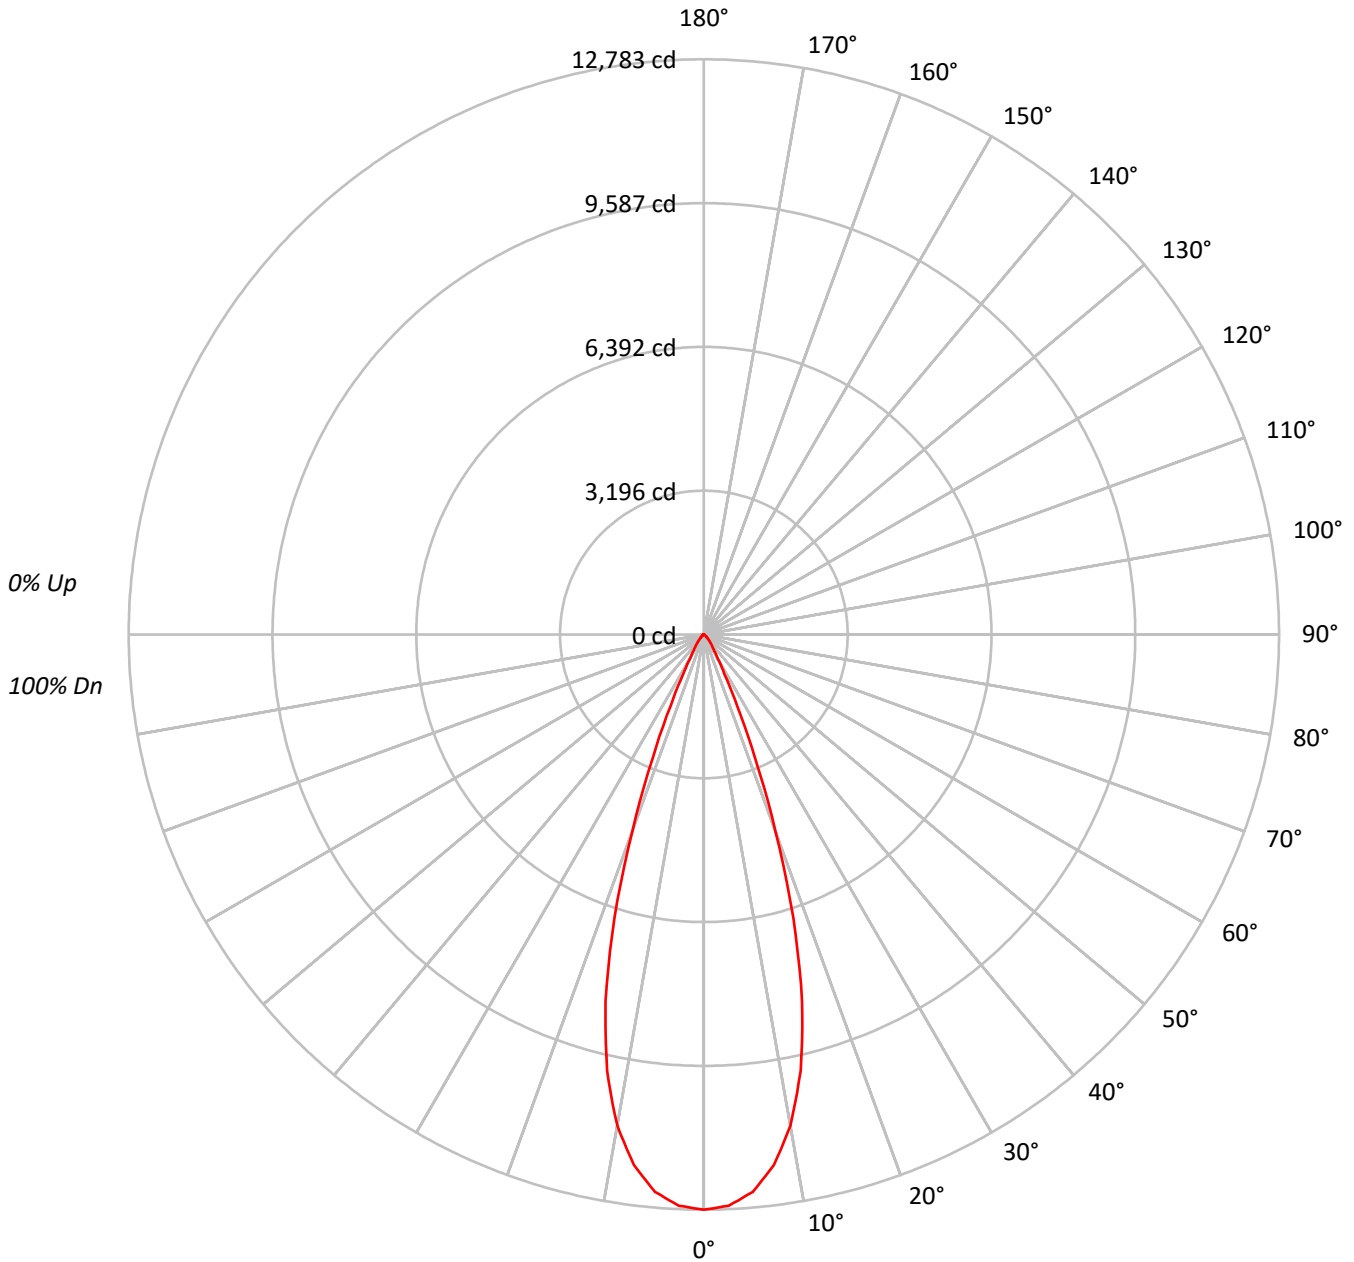



TEST NUMBER: P766505

CATALOG NUMBER: LD6D45BD010-EU6DR3540509040-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | 100 | | | | | | | | | | | | | | | | |
| 1 | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 | 103 | 101 | 100 | 99 | 98 | 98 | 96 | | | 96 | | | | | | | | | | | | | | | | |
| 2 | 110 | 106 | 103 | 101 | 108 | 105 | 102 | 99 | 102 | 99 | 97 | 99 | 97 | 95 | 96 | 95 | 93 | 92 | | | 92 | | | | | | | | | | | | | | | | |
| 3 | 106 | 101 | 97 | 94 | 105 | 100 | 96 | 93 | 97 | 95 | 92 | 95 | 93 | 91 | 93 | 91 | 89 | 88 | | | 88 | | | | | | | | | | | | | | | | |
| 4 | 103 | 97 | 92 | 89 | 101 | 96 | 92 | 89 | 94 | 90 | 88 | 92 | 89 | 87 | 90 | 88 | 86 | 84 | | | 84 | | | | | | | | | | | | | | | | |
| 5 | 99 | 93 | 88 | 85 | 98 | 92 | 87 | 84 | 90 | 86 | 84 | 89 | 85 | 83 | 87 | 84 | 82 | 81 | | | 81 | | | | | | | | | | | | | | | | |
| 6 | 96 | 89 | 84 | 81 | 94 | 88 | 84 | 81 | 87 | 83 | 80 | 85 | 82 | 80 | 84 | 81 | 79 | 78 | | | 78 | | | | | | | | | | | | | | | | |
| 7 | 93 | 85 | 81 | 78 | 91 | 85 | 80 | 77 | 84 | 80 | 77 | 83 | 79 | 77 | 82 | 79 | 76 | 75 | | | 75 | | | | | | | | | | | | | | | | |
| 8 | 90 | 82 | 78 | 74 | 88 | 82 | 77 | 74 | 81 | 77 | 74 | 80 | 76 | 74 | 79 | 76 | 73 | 72 | | | 72 | | | | | | | | | | | | | | | | |
| 9 | 87 | 79 | 75 | 72 | 86 | 79 | 75 | 72 | 78 | 74 | 71 | 77 | 74 | 71 | 77 | 73 | 71 | 70 | | | 70 | | | | | | | | | | | | | | | | |
| 10 | 84 | 77 | 72 | 69 | 83 | 76 | 72 | 69 | 76 | 72 | 69 | 75 | 71 | 69 | 74 | 71 | 69 | 68 | | | 68 | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 1396724 |
| 5° | 1363902 |
| 10° | 1229240 |
| 15° | 954080 |
| 20° | 541146 |
| 25° | 210527 |
| 30° | 78537 |
| 35° | 43056 |
| 40° | 28141 |
| 45° | 17121 |
| 50° | 10896 |
| 55° | 7696 |
| 60° | 5638 |
| 65° | 3077 |
| 70° | 224 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 17121 cd/sqm



TEST NUMBER: P766505
 CATALOG NUMBER: LD6D45BD010-EU6DR3540509040-6LBDP1MW

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 1143.7 | 24.6 |
| 10°-20° | 2233.0 | 48.1 |
| 20°-30° | 910.7 | 19.6 |
| 30°-40° | 217.9 | 4.7 |
| 40°-50° | 90.8 | 2.0 |
| 50°-60° | 37.6 | 0.8 |
| 60°-70° | 11.8 | 0.3 |
| 70°-80° | 0.3 | 0.0 |
| 80°-90° | 0.2 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 4287.4 | 92.3 |
| 0°-40° | 4505.3 | 97.0 |
| 0°-60° | 4633.7 | 99.7 |
| 0°-90° | 4646.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 4646.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-------|------|
| 0° | 12783 | |
| 5° | 12436 | ### |
| 15° | 8435 | 2233 |
| 25° | 1746 | 911 |
| 35° | 323 | 218 |
| 45° | 111 | 91 |
| 55° | 40 | 38 |
| 65° | 12 | 12 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P766505
CATALOG NUMBER: LD6D45BD010-EU6DR3540509040-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|---------|
| 0° | 12783.4 |
| 2.5° | 12706.7 |
| 5° | 12435.5 |
| 7.5° | 11894.5 |
| 10° | 11079.6 |
| 12.5° | 9932.1 |
| 15° | 8434.6 |
| 17.5° | 6603.3 |
| 20° | 4654.1 |
| 22.5° | 2967.7 |
| 25° | 1746.3 |
| 27.5° | 987.1 |
| 30° | 622.5 |
| 32.5° | 437.1 |
| 35° | 322.8 |
| 37.5° | 249.6 |
| 40° | 197.3 |
| 42.5° | 152.0 |
| 45° | 110.8 |
| 47.5° | 83.0 |
| 50° | 64.1 |
| 52.5° | 50.9 |
| 55° | 40.4 |
| 57.5° | 32.8 |
| 60° | 25.8 |
| 62.5° | 18.8 |
| 65° | 11.9 |
| 67.5° | 4.2 |
| 70° | 0.7 |
| 72.5° | 0.7 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.7 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)