

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P766975

Luminaire Tested: LD6D45BD010-EU6DR6540509040-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P766975  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D45BD010-EU6DR6540509040-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4784.4 lumens  
Efficiency: N/A  
Efficacy: 123.6 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct


Input Watts (W): 38.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P766975  
CATALOG NUMBER: LD6D45BD010-EU6DR6540509040-6LBS1H

### Luminous Intensity Polar Plot

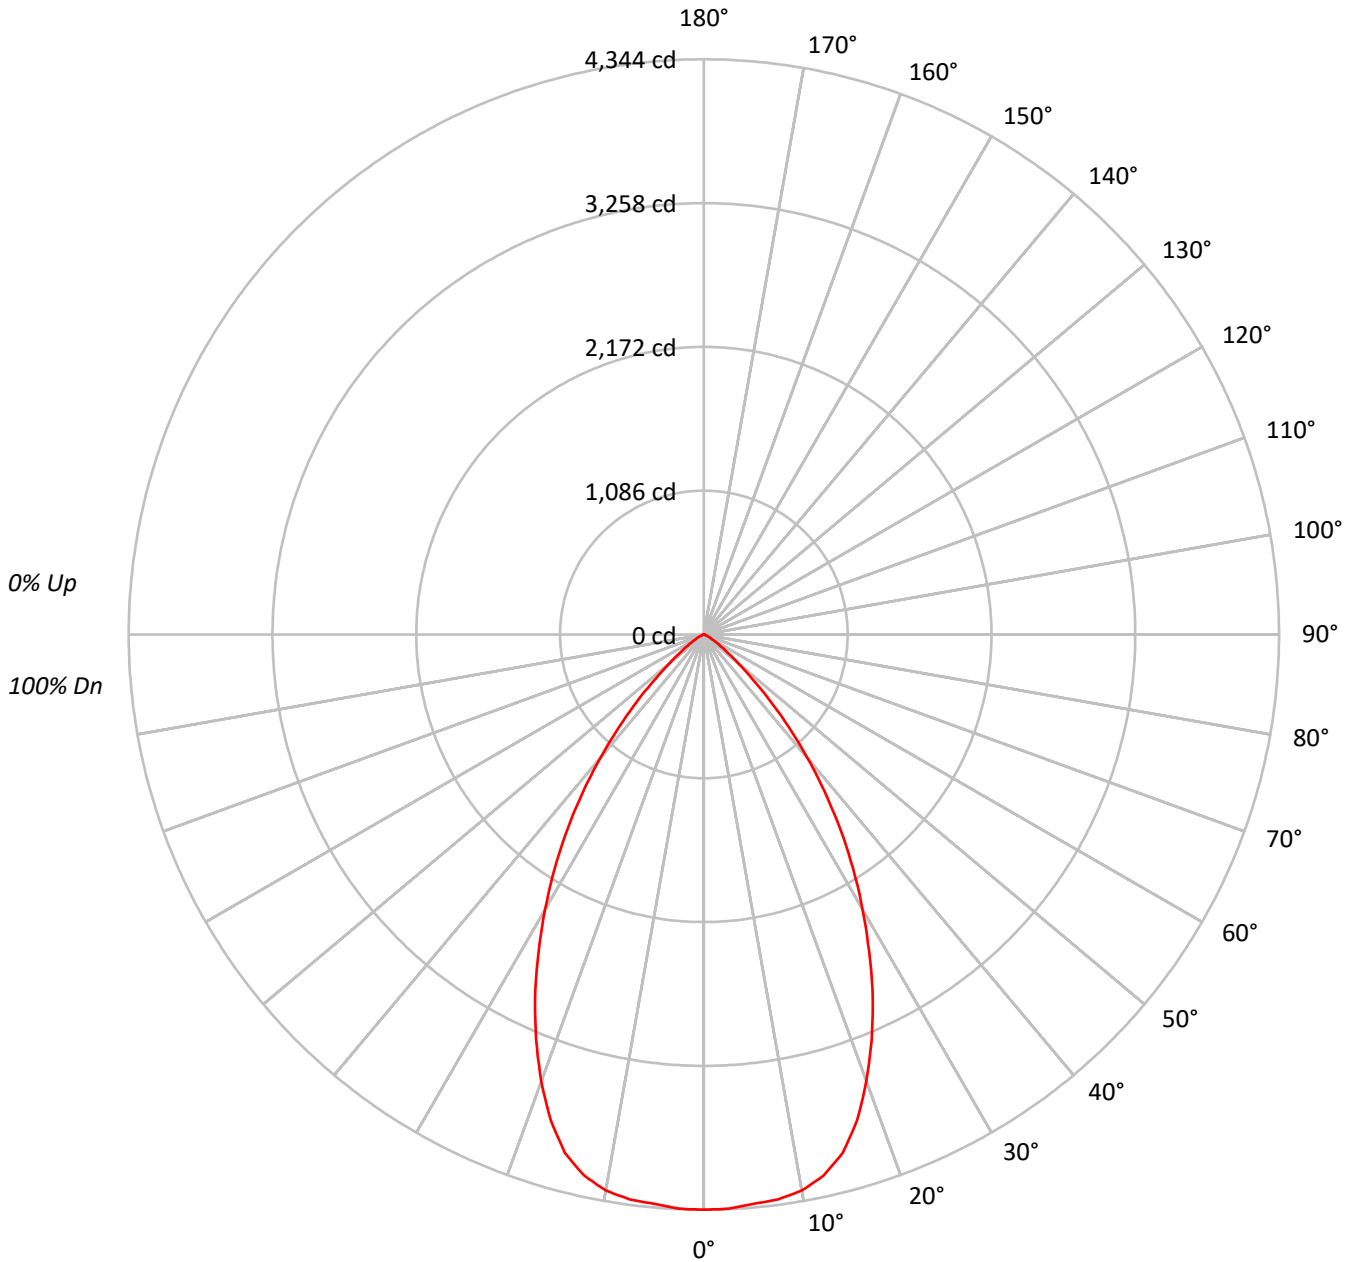



TEST NUMBER: P766975  
 CATALOG NUMBER: LD6D45BD010-EU6DR6540509040-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	253712
5°	253069
10°	252852
15°	245061
20°	223095
25°	194414
30°	161698
35°	128122
40°	92473
45°	58420
50°	30447
55°	16190
60°	8504
65°	4671
70°	1964
75°	2166
80°	1514
85°	1273

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 58420 cd/sqm



TEST NUMBER: P766975

CATALOG NUMBER: LD6D45BD010-EU6DR6540509040-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	410.8	8.6
10°-20°	1125.0	23.5
20°-30°	1375.1	28.7
30°-40°	1115.7	23.3
40°-50°	556.0	11.6
50°-60°	155.1	3.2
60°-70°	35.2	0.7
70°-80°	9.2	0.2
80°-90°	2.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2910.8	60.8
0°-40°	4026.5	84.2
0°-60°	4737.6	99.0
0°-90°	4784.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4784.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	4344	
5°	4317	411
15°	4053	1125
25°	3017	1375
35°	1797	1116
45°	707	556
55°	159	155
65°	34	35
75°	10	9
85°	2	2
90°	0	



TEST NUMBER: P766975

CATALOG NUMBER: LD6D45BD010-EU6DR6540509040-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	4344.1
2.5°	4340.9
5°	4316.6
7.5°	4302.6
10°	4263.6
12.5°	4184.5
15°	4053.0
17.5°	3847.4
20°	3589.5
22.5°	3311.2
25°	3016.9
27.5°	2702.2
30°	2397.7
32.5°	2097.0
35°	1797.0
37.5°	1497.6
40°	1212.9
42.5°	946.1
45°	707.3
47.5°	492.8
50°	335.1
52.5°	231.1
55°	159.0
57.5°	107.2
60°	72.8
62.5°	50.4
65°	33.8
67.5°	17.2
70°	11.5
72.5°	10.9
75°	9.6
77.5°	6.4
80°	4.5
82.5°	3.2
85°	1.9
87.5°	1.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)