

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758684

Luminaire Tested: LD6D05D010-EU6DR650210IC9024-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P758684  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D05D010-EU6DR650210IC9024-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 530.4 lumens  
Efficiency: N/A  
Efficacy: 70.7 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P758684

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9024-6LBDP1LI

### Luminous Intensity Polar Plot

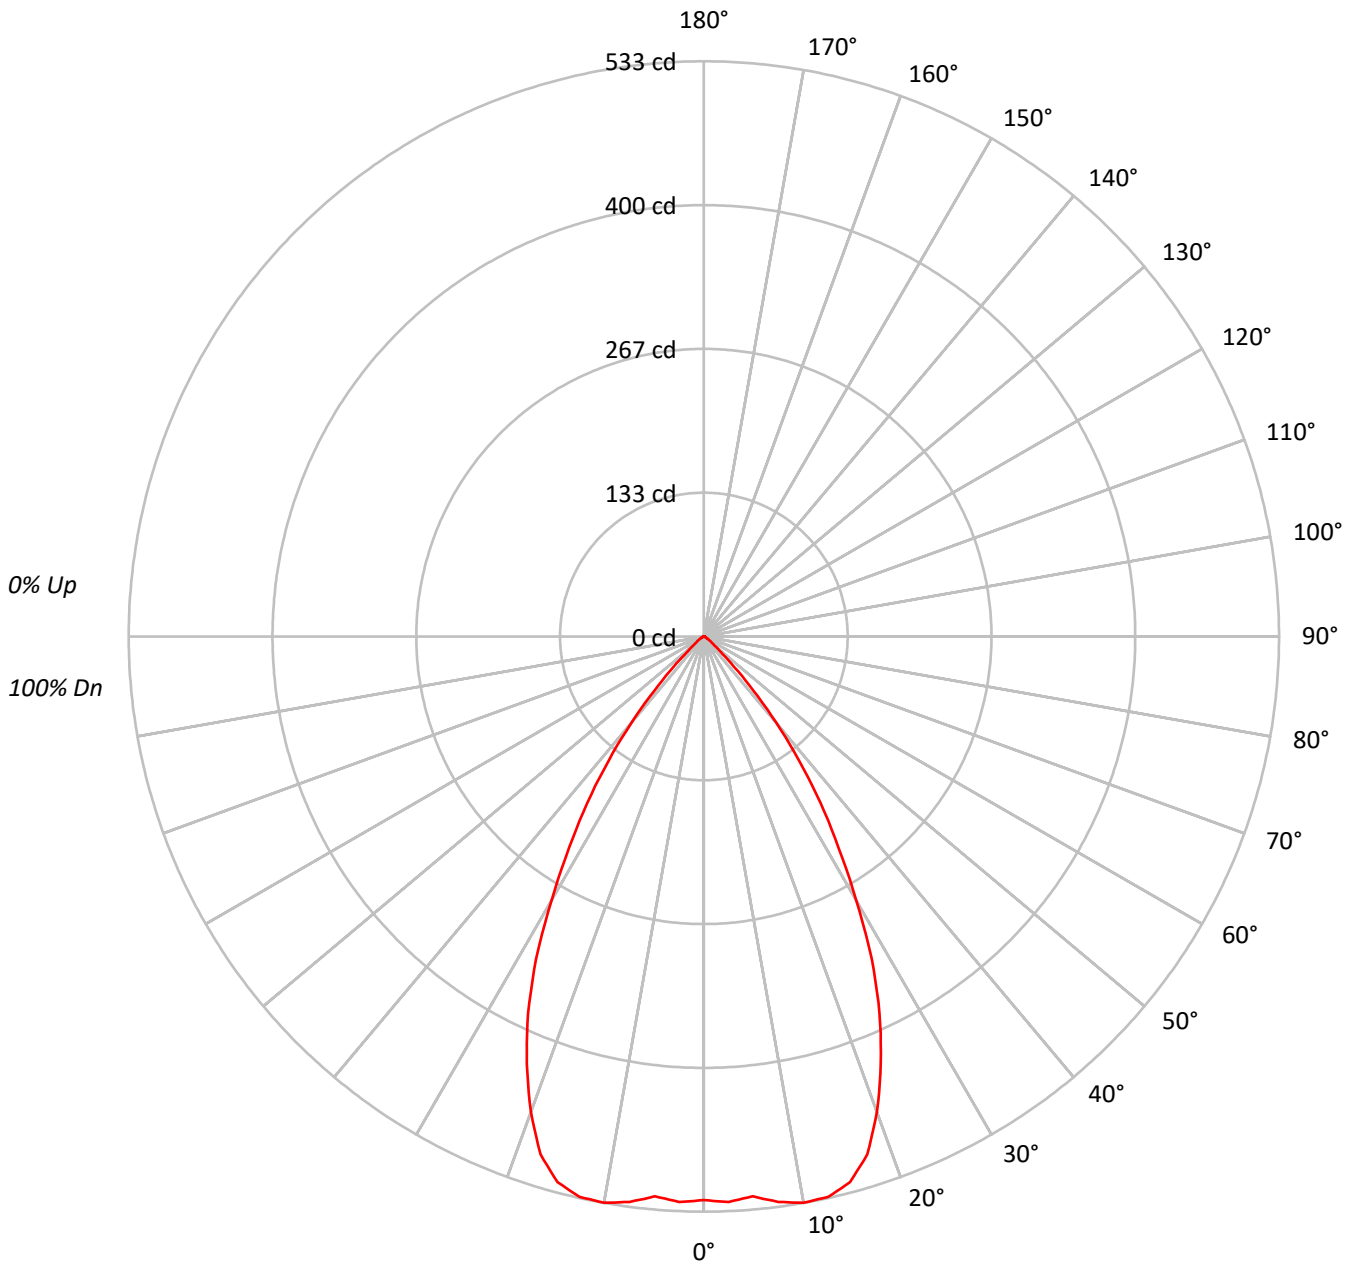



TEST NUMBER: P758684

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9024-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	57056
5°	57109
10°	59112
15°	59216
20°	54520
25°	46450
30°	35565
35°	25116
40°	14833
45°	6026
50°	2176
55°	1219
60°	699
65°	388
70°	415
75°	296
80°	315
85°	251

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 6026 cd/sqm



TEST NUMBER: P758684

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9024-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	50.3	9.5
10°-20°	145.1	27.3
20°-30°	174.0	32.8
30°-40°	117.0	22.1
40°-50°	35.0	6.6
50°-60°	6.2	1.2
60°-70°	1.8	0.3
70°-80°	0.9	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	369.4	69.6
0°-40°	486.4	91.7
0°-60°	527.5	99.5
0°-90°	530.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	530.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	522	
5°	521	50
15°	524	145
25°	385	174
35°	188	117
45°	39	35
55°	6	6
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P758684

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9024-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	522.2
2.5°	524.5
5°	520.7
7.5°	528.5
10°	532.8
12.5°	531.8
15°	523.5
17.5°	503.2
20°	468.9
22.5°	428.5
25°	385.3
27.5°	336.6
30°	281.9
32.5°	232.3
35°	188.3
37.5°	145.0
40°	104.0
42.5°	67.9
45°	39.0
47.5°	20.6
50°	12.8
52.5°	8.9
55°	6.4
57.5°	4.6
60°	3.2
62.5°	2.1
65°	1.5
67.5°	1.3
70°	1.3
72.5°	1.0
75°	0.7
77.5°	0.7
80°	0.5
82.5°	0.3
85°	0.2
87.5°	0.2
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)