

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758151

Luminaire Tested: LD6D05D010-EU6DR300210IC9027-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P758151  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D05D010-EU6DR300210IC9027-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 656.2 lumens  
Efficiency: N/A  
Efficacy: 87.5 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P758151

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBDP1LI

### Luminous Intensity Polar Plot

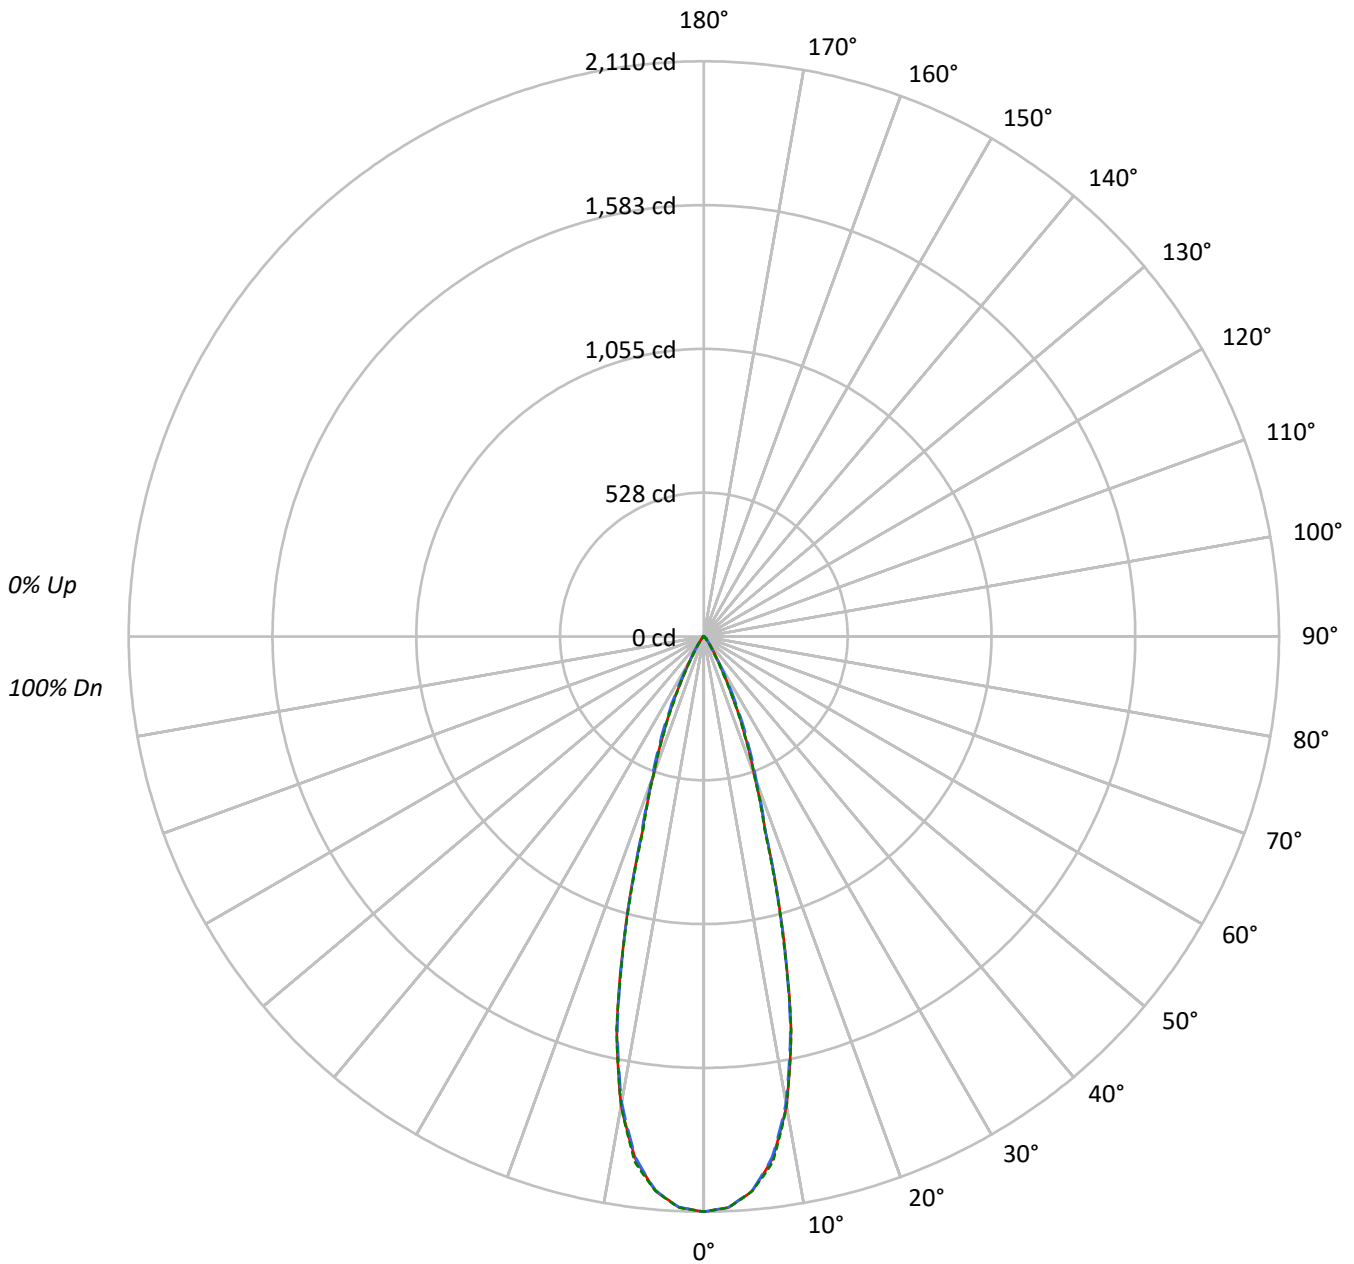



TEST NUMBER: P758151

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	161514	161514	161514
5°	156876	156691	156883
10°	135877	134921	135846
15°	88650	88174	87731
20°	44084	45737	44027
25°	22204	25041	21747
30°	8892	9687	7751
35°	4121	3953	3308
40°	1779	1978	1679
45°	1256	1559	1267
50°	429	1131	453
55°	254	467	254
60°	168	214	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 1559 cd/sqm



TEST NUMBER: P758151

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	185.5	28.3
10°-20°	298.8	45.5
20°-30°	129.1	19.7
30°-40°	29.4	4.5
40°-50°	10.1	1.5
50°-60°	2.5	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	613.5	93.5
0°-40°	642.9	98.0
0°-60°	655.5	99.9
0°-90°	656.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	656.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2110	2110	2110	2110	2110	
5°	2042	2040	2039	2044	2042	186
15°	1119	1105	1113	1109	1107	300
25°	263	273	296	266	258	126
35°	44	45	42	42	35	30
45°	12	14	14	14	12	8
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758151

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2110.1	2110.1	2110.1	2110.1	2110.1
2.5°	2096.0	2094.6	2095.5	2096.5	2096.9
5°	2041.7	2039.7	2039.3	2043.5	2041.8
7.5°	1931.9	1929.2	1924.9	1934.6	1943.6
10°	1748.2	1745.1	1735.9	1740.4	1747.8
12.5°	1476.8	1466.8	1466.6	1481.1	1479.1
15°	1118.7	1105.3	1112.7	1109.1	1107.1
17.5°	752.3	747.1	757.1	754.1	741.1
20°	541.2	542.5	561.5	552.0	540.5
22.5°	394.9	399.7	422.3	397.7	388.7
25°	262.9	272.9	296.5	265.9	257.5
27.5°	161.7	166.3	190.2	159.6	155.1
30°	100.6	98.3	109.6	94.1	87.7
32.5°	66.0	63.1	66.7	59.9	54.7
35°	44.1	45.1	42.3	41.9	35.4
37.5°	27.6	31.7	28.0	29.9	22.8
40°	17.8	23.0	19.8	21.9	16.8
42.5°	14.6	17.7	16.3	17.3	14.9
45°	11.6	14.4	14.4	14.4	11.7
47.5°	6.4	9.6	12.3	9.9	6.8
50°	3.6	4.9	9.5	5.1	3.8
52.5°	2.5	2.8	6.5	2.9	2.6
55°	1.9	1.9	3.5	2.1	1.9
57.5°	1.4	1.5	1.9	1.5	1.4
60°	1.1	1.1	1.4	1.3	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)