

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758154

Luminaire Tested: LD6D05D010-EU6DR300210IC9027-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P758154
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR300210IC9027-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 657.8 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758154
CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBS1H

Luminous Intensity Polar Plot

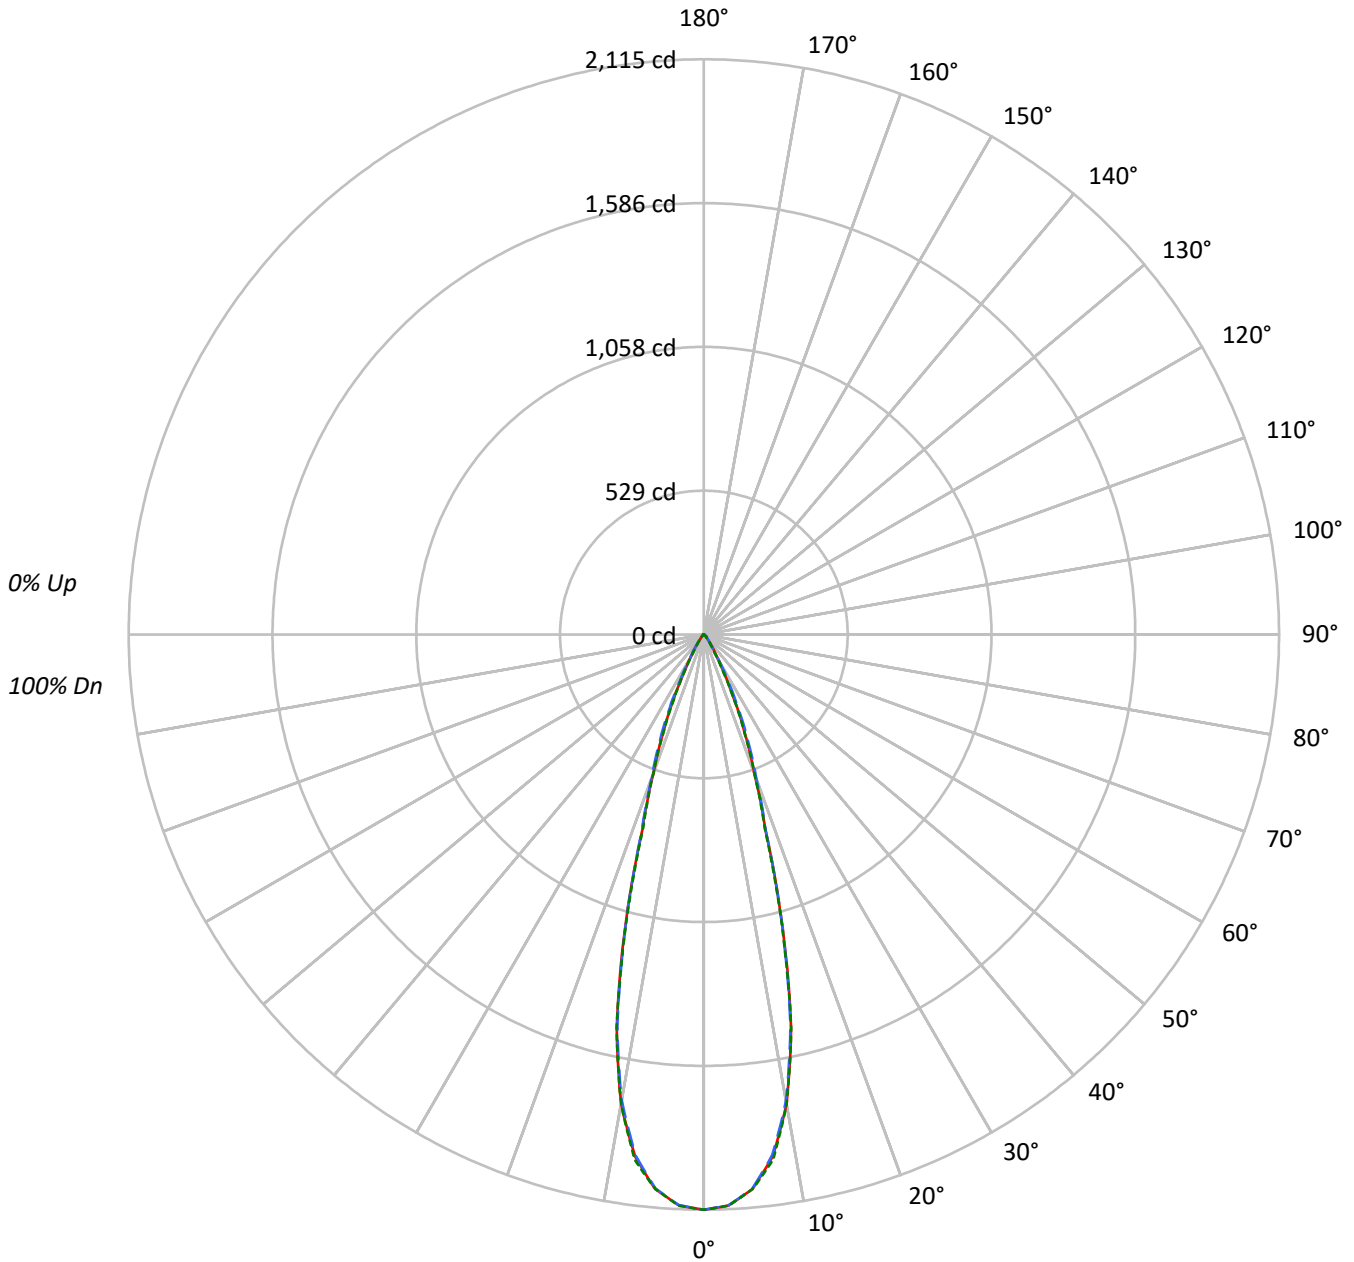



TEST NUMBER: P758154

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	161912	161912	161912
5°	157267	157083	157275
10°	136212	135256	136181
15°	88880	88396	87952
20°	44190	45851	44133
25°	22263	25100	21807
30°	8909	9713	7760
35°	4130	3962	3317
40°	1789	1978	1679
45°	1256	1559	1267
50°	429	1143	453
55°	254	480	254
60°	168	214	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1559 cd/sqm



TEST NUMBER: P758154

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	186.0	28.3
10°-20°	299.6	45.5
20°-30°	129.5	19.7
30°-40°	29.5	4.5
40°-50°	10.1	1.5
50°-60°	2.5	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	615.0	93.5
0°-40°	644.5	98.0
0°-60°	657.1	99.9
0°-90°	657.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	657.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2115	2115	2115	2115	2115	
5°	2047	2045	2044	2049	2047	186
15°	1122	1108	1116	1112	1110	300
25°	264	274	297	267	258	126
35°	44	45	42	42	36	30
45°	12	14	14	14	12	8
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758154

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9027-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2115.3	2115.3	2115.3	2115.3	2115.3
2.5°	2101.3	2099.9	2100.7	2101.7	2102.2
5°	2046.8	2044.8	2044.4	2048.6	2046.9
7.5°	1936.8	1934.0	1929.8	1939.4	1948.4
10°	1752.5	1749.4	1740.2	1744.7	1752.1
12.5°	1480.6	1470.5	1470.3	1484.8	1482.9
15°	1121.6	1108.0	1115.5	1111.9	1109.9
17.5°	754.2	749.0	759.0	756.0	743.0
20°	542.5	543.9	562.9	553.4	541.8
22.5°	395.9	400.8	423.3	398.7	389.7
25°	263.6	273.5	297.2	266.6	258.2
27.5°	162.1	166.7	190.7	160.0	155.5
30°	100.8	98.5	109.9	94.3	87.8
32.5°	66.2	63.3	66.9	60.0	54.8
35°	44.2	45.1	42.4	42.1	35.5
37.5°	27.6	31.8	28.0	29.9	22.9
40°	17.9	23.0	19.8	21.9	16.8
42.5°	14.7	17.8	16.3	17.4	15.0
45°	11.6	14.4	14.4	14.4	11.7
47.5°	6.4	9.7	12.4	9.9	6.9
50°	3.6	4.9	9.6	5.1	3.8
52.5°	2.5	2.8	6.5	2.9	2.6
55°	1.9	1.9	3.6	2.1	1.9
57.5°	1.4	1.5	1.9	1.5	1.4
60°	1.1	1.1	1.4	1.3	1.1
62.5°	0.9	0.9	0.9	0.9	0.9
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)