

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758166

Luminaire Tested: LD6D05D010-EU6DR300210IC9030-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P758166
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR300210IC9030-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 636.9 lumens
Efficiency: N/A
Efficacy: 84.9 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758166
CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1B

Luminous Intensity Polar Plot

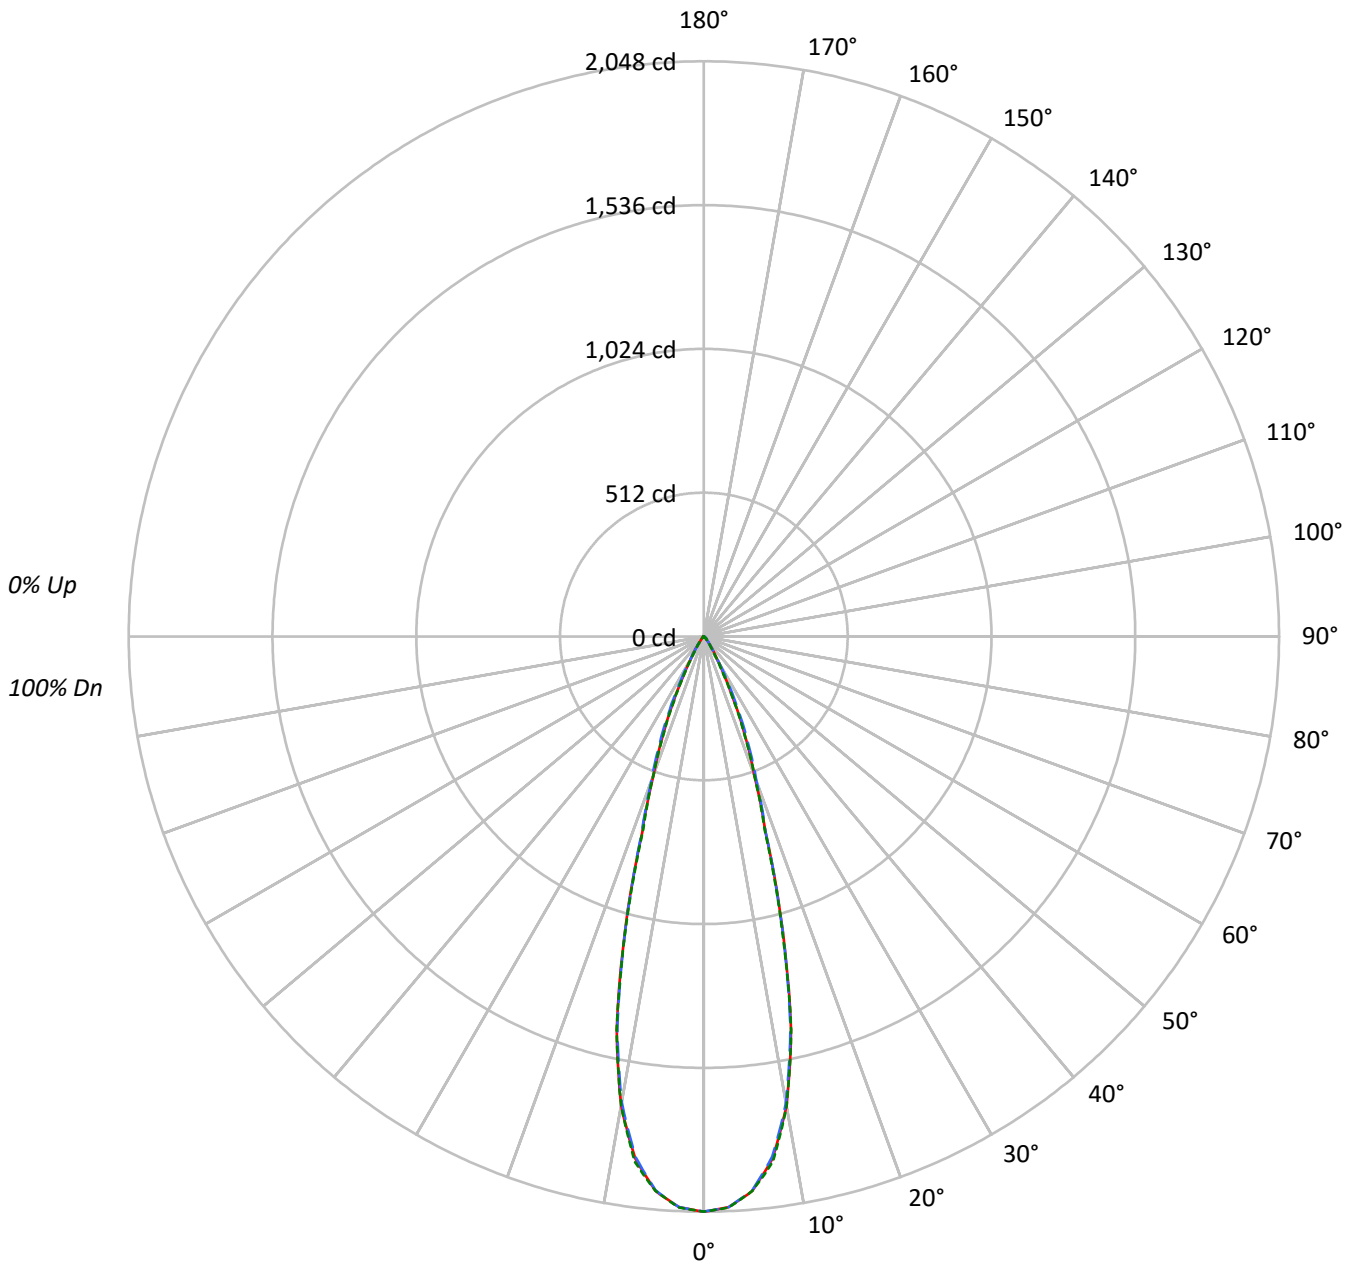



TEST NUMBER: P758166

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	156746	156746	156746
5°	152250	152073	152258
10°	131875	130942	131844
15°	86035	85583	85147
20°	42781	44385	42724
25°	21553	24298	21106
30°	8626	9404	7522
35°	4009	3831	3214
40°	1729	1918	1629
45°	1223	1515	1223
50°	417	1096	441
55°	240	454	254
60°	168	199	168
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1515 cd/sqm



TEST NUMBER: P758166

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	180.1	28.3
10°-20°	290.0	45.5
20°-30°	125.3	19.7
30°-40°	28.6	4.5
40°-50°	9.8	1.5
50°-60°	2.4	0.4
60°-70°	0.6	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	595.4	93.5
0°-40°	624.0	98.0
0°-60°	636.2	99.9
0°-90°	636.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	636.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2048	2048	2048	2048	2048	
5°	1982	1980	1979	1983	1982	180
15°	1086	1073	1080	1076	1074	291
25°	255	265	288	258	250	122
35°	43	44	41	41	34	29
45°	11	14	14	14	11	8
55°	2	2	3	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758166

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2047.8	2047.8	2047.8	2047.8	2047.8
2.5°	2034.3	2032.9	2033.7	2034.7	2035.1
5°	1981.5	1979.6	1979.2	1983.3	1981.6
7.5°	1875.0	1872.3	1868.2	1877.6	1886.3
10°	1696.7	1693.6	1684.7	1689.1	1696.3
12.5°	1433.4	1423.6	1423.4	1437.5	1435.5
15°	1085.7	1072.7	1080.0	1076.4	1074.5
17.5°	730.2	725.1	734.8	731.8	719.3
20°	525.2	526.5	544.9	535.7	524.5
22.5°	383.2	388.0	409.8	386.0	377.2
25°	255.2	264.8	287.7	258.1	249.9
27.5°	156.9	161.3	184.6	154.9	150.5
30°	97.6	95.4	106.4	91.3	85.1
32.5°	64.1	61.2	64.7	58.1	53.1
35°	42.9	43.7	41.0	40.7	34.4
37.5°	26.8	30.8	27.2	28.9	22.1
40°	17.3	22.3	19.2	21.2	16.3
42.5°	14.2	17.2	15.8	16.8	14.5
45°	11.3	14.0	14.0	14.0	11.3
47.5°	6.2	9.3	12.0	9.6	6.6
50°	3.5	4.7	9.2	4.9	3.7
52.5°	2.4	2.7	6.4	2.8	2.5
55°	1.8	1.9	3.4	2.0	1.9
57.5°	1.4	1.5	1.8	1.5	1.4
60°	1.1	1.1	1.3	1.2	1.1
62.5°	0.8	0.8	0.9	0.8	0.8
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)