

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758167

Luminaire Tested: LD6D05D010-EU6DR300210IC9030-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P758167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR300210IC9030-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 679.3 lumens
Efficiency: N/A
Efficacy: 90.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758167
CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1H

Luminous Intensity Polar Plot

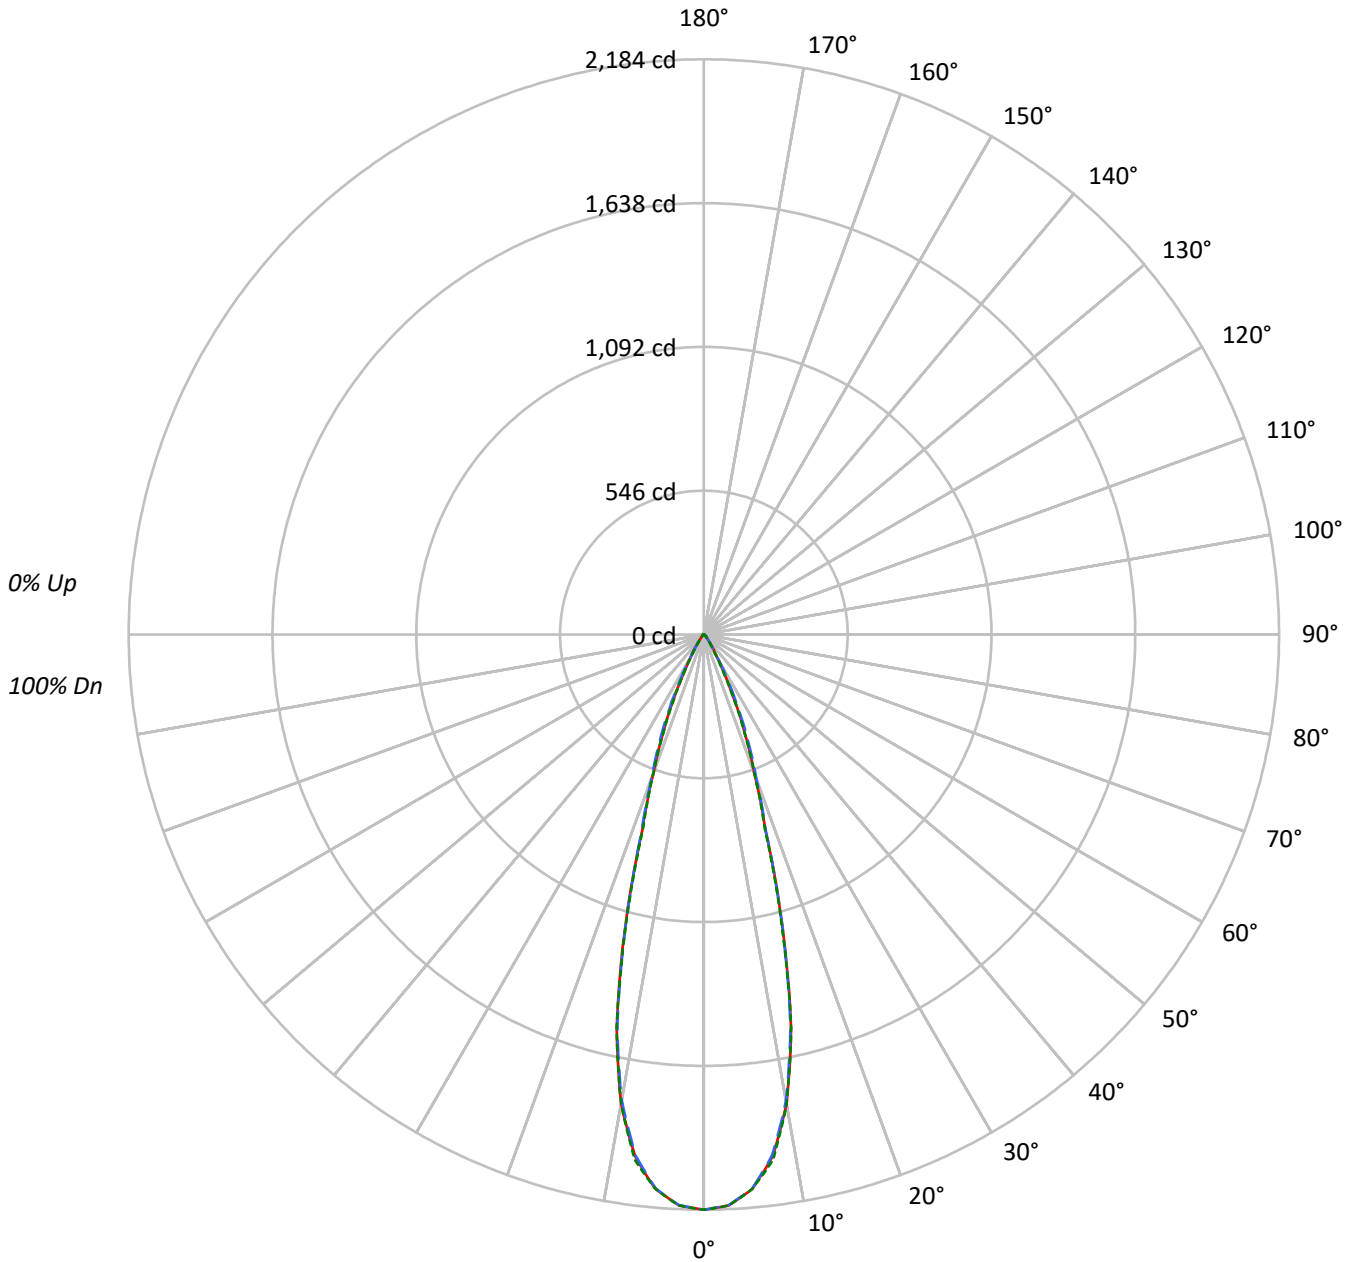



TEST NUMBER: P758167

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	167186	167186	167186
5°	162385	162200	162392
10°	140650	139655	140619
15°	91764	91273	90813
20°	45632	47342	45566
25°	22989	25920	22516
30°	9201	10023	8016
35°	4270	4093	3429
40°	1839	2048	1739
45°	1299	1613	1310
50°	453	1179	476
55°	254	494	280
60°	184	214	184
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1613 cd/sqm



TEST NUMBER: P758167

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	192.1	28.3
10°-20°	309.3	45.5
20°-30°	133.7	19.7
30°-40°	30.5	4.5
40°-50°	10.5	1.5
50°-60°	2.6	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	635.1	93.5
0°-40°	665.5	98.0
0°-60°	678.5	99.9
0°-90°	679.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	679.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2184	2184	2184	2184	2184	
5°	2113	2111	2111	2115	2114	192
15°	1158	1144	1152	1148	1146	310
25°	272	282	307	275	267	130
35°	46	47	44	43	37	31
45°	12	15	15	15	12	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758167

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9030-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2184.2	2184.2	2184.2	2184.2	2184.2
2.5°	2169.7	2168.2	2169.1	2170.2	2170.6
5°	2113.4	2111.4	2111.0	2115.3	2113.5
7.5°	1999.8	1997.0	1992.6	2002.5	2011.9
10°	1809.6	1806.4	1796.8	1801.6	1809.2
12.5°	1528.7	1518.4	1518.1	1533.2	1531.1
15°	1158.0	1144.1	1151.8	1148.1	1146.0
17.5°	778.8	773.4	783.7	780.6	767.2
20°	560.2	561.6	581.2	571.3	559.4
22.5°	408.8	413.8	437.1	411.7	402.3
25°	272.2	282.5	306.9	275.3	266.6
27.5°	167.4	172.1	196.9	165.2	160.5
30°	104.1	101.8	113.4	97.3	90.7
32.5°	68.3	65.3	69.0	62.0	56.6
35°	45.7	46.6	43.8	43.4	36.7
37.5°	28.5	32.8	28.9	30.9	23.6
40°	18.4	23.8	20.5	22.6	17.4
42.5°	15.1	18.3	16.8	17.9	15.5
45°	12.0	14.9	14.9	14.9	12.1
47.5°	6.6	10.0	12.8	10.2	7.1
50°	3.8	5.0	9.9	5.3	4.0
52.5°	2.6	2.9	6.8	3.0	2.7
55°	1.9	2.1	3.7	2.1	2.1
57.5°	1.5	1.6	1.9	1.6	1.5
60°	1.2	1.2	1.4	1.3	1.2
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.4	0.4	0.4	0.4
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)