

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758633

Luminaire Tested: LD6D05D010-EU6DR600210IC9030-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P758633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR600210IC9030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 600.1 lumens
Efficiency: N/A
Efficacy: 80.0 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.84
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758633

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9030-6LBDP1MW

Luminous Intensity Polar Plot

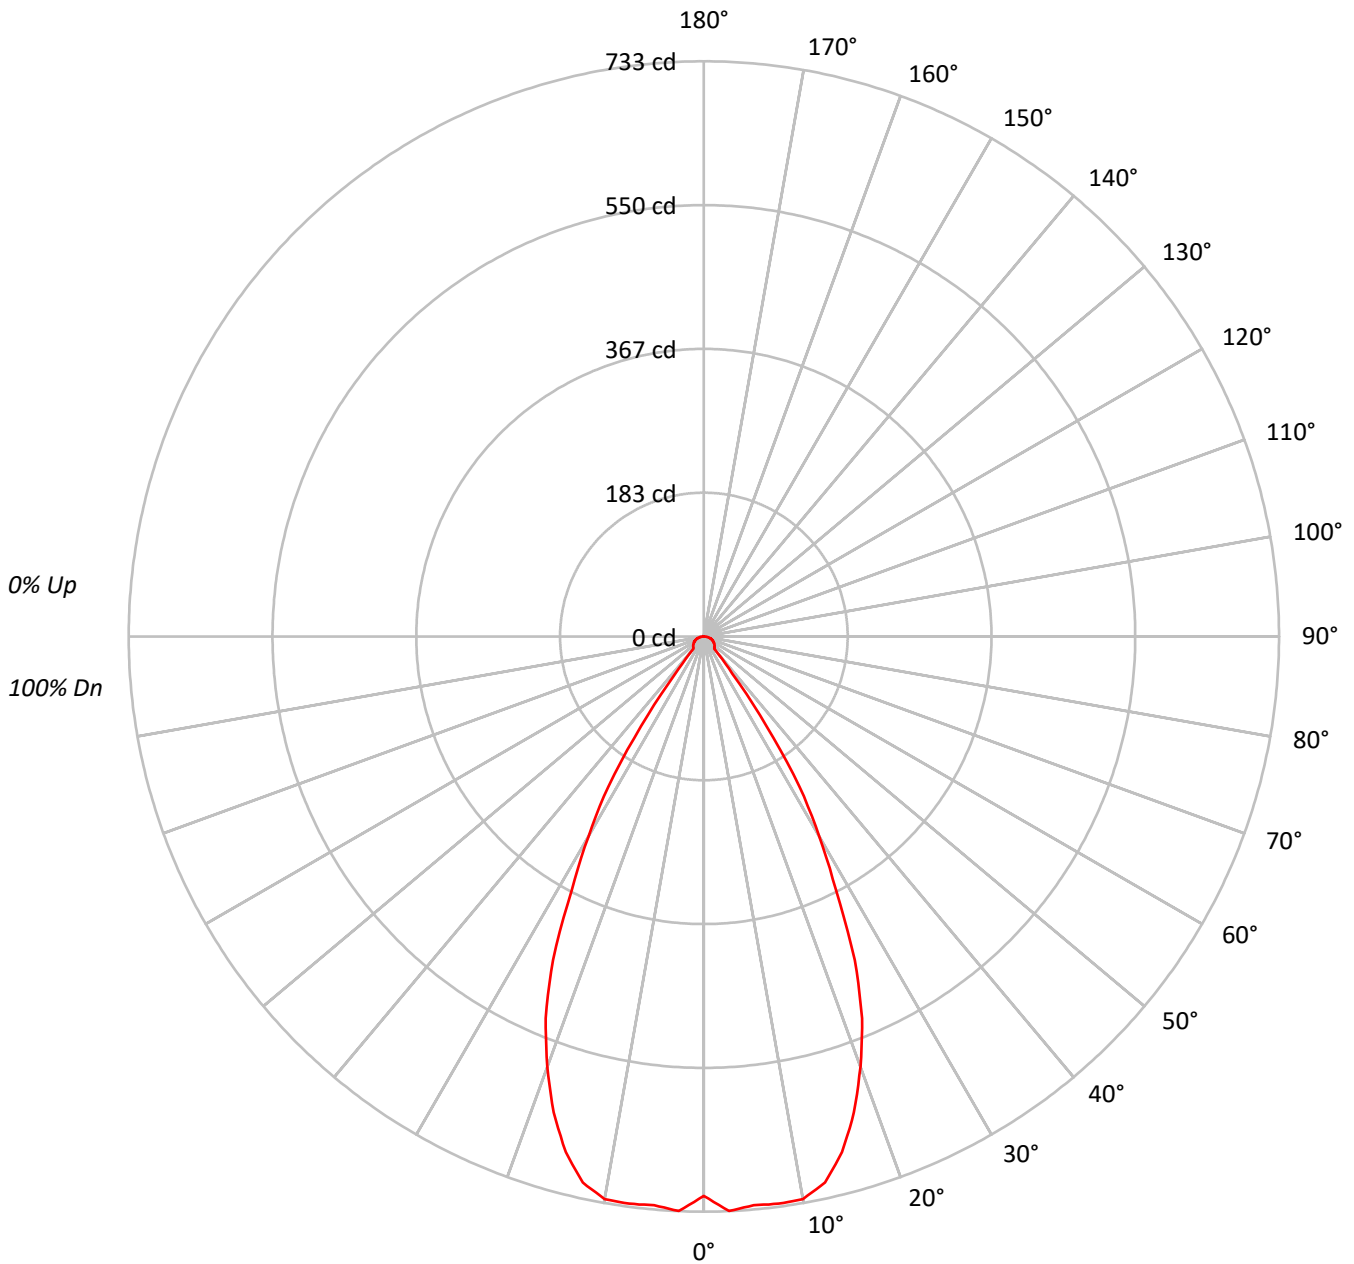



TEST NUMBER: P758633

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9030-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	63	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	77881
5°	79791
10°	80758
15°	76930
20°	67822
25°	54853
30°	37117
35°	18594
40°	3009
45°	2951
50°	3009
55°	3048
60°	3147
65°	3206
70°	3290
75°	3335
80°	3209
85°	2633

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 3335 cd/sqm



TEST NUMBER: P758633

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9030-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.5	11.6
10°-20°	188.1	31.3
20°-30°	202.4	33.7
30°-40°	88.0	14.7
40°-50°	14.8	2.5
50°-60°	14.4	2.4
60°-70°	12.3	2.0
70°-80°	8.2	1.4
80°-90°	2.4	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	460.0	76.7
0°-40°	548.0	91.3
0°-60°	577.1	96.2
0°-90°	600.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	600.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	713	
5°	728	70
15°	680	188
25°	455	202
35°	139	88
45°	19	15
55°	16	14
65°	12	12
75°	8	8
85°	2	2
90°	0	



TEST NUMBER: P758633

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	712.8
2.5°	732.8
5°	727.5
7.5°	729.1
10°	727.9
12.5°	712.8
15°	680.1
17.5°	636.1
20°	583.3
22.5°	526.9
25°	455.0
27.5°	364.0
30°	294.2
32.5°	226.7
35°	139.4
37.5°	59.6
40°	21.1
42.5°	19.5
45°	19.1
47.5°	18.4
50°	17.7
52.5°	16.9
55°	16.0
57.5°	15.2
60°	14.4
62.5°	13.5
65°	12.4
67.5°	11.4
70°	10.3
72.5°	9.1
75°	7.9
77.5°	6.5
80°	5.1
82.5°	3.6
85°	2.1
87.5°	0.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)