

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758709

Luminaire Tested: LD6D05D010-EU6DR650210IC9030-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P758709
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR650210IC9030-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 579.0 lumens
Efficiency: N/A
Efficacy: 77.2 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758709

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBDP1H

Luminous Intensity Polar Plot

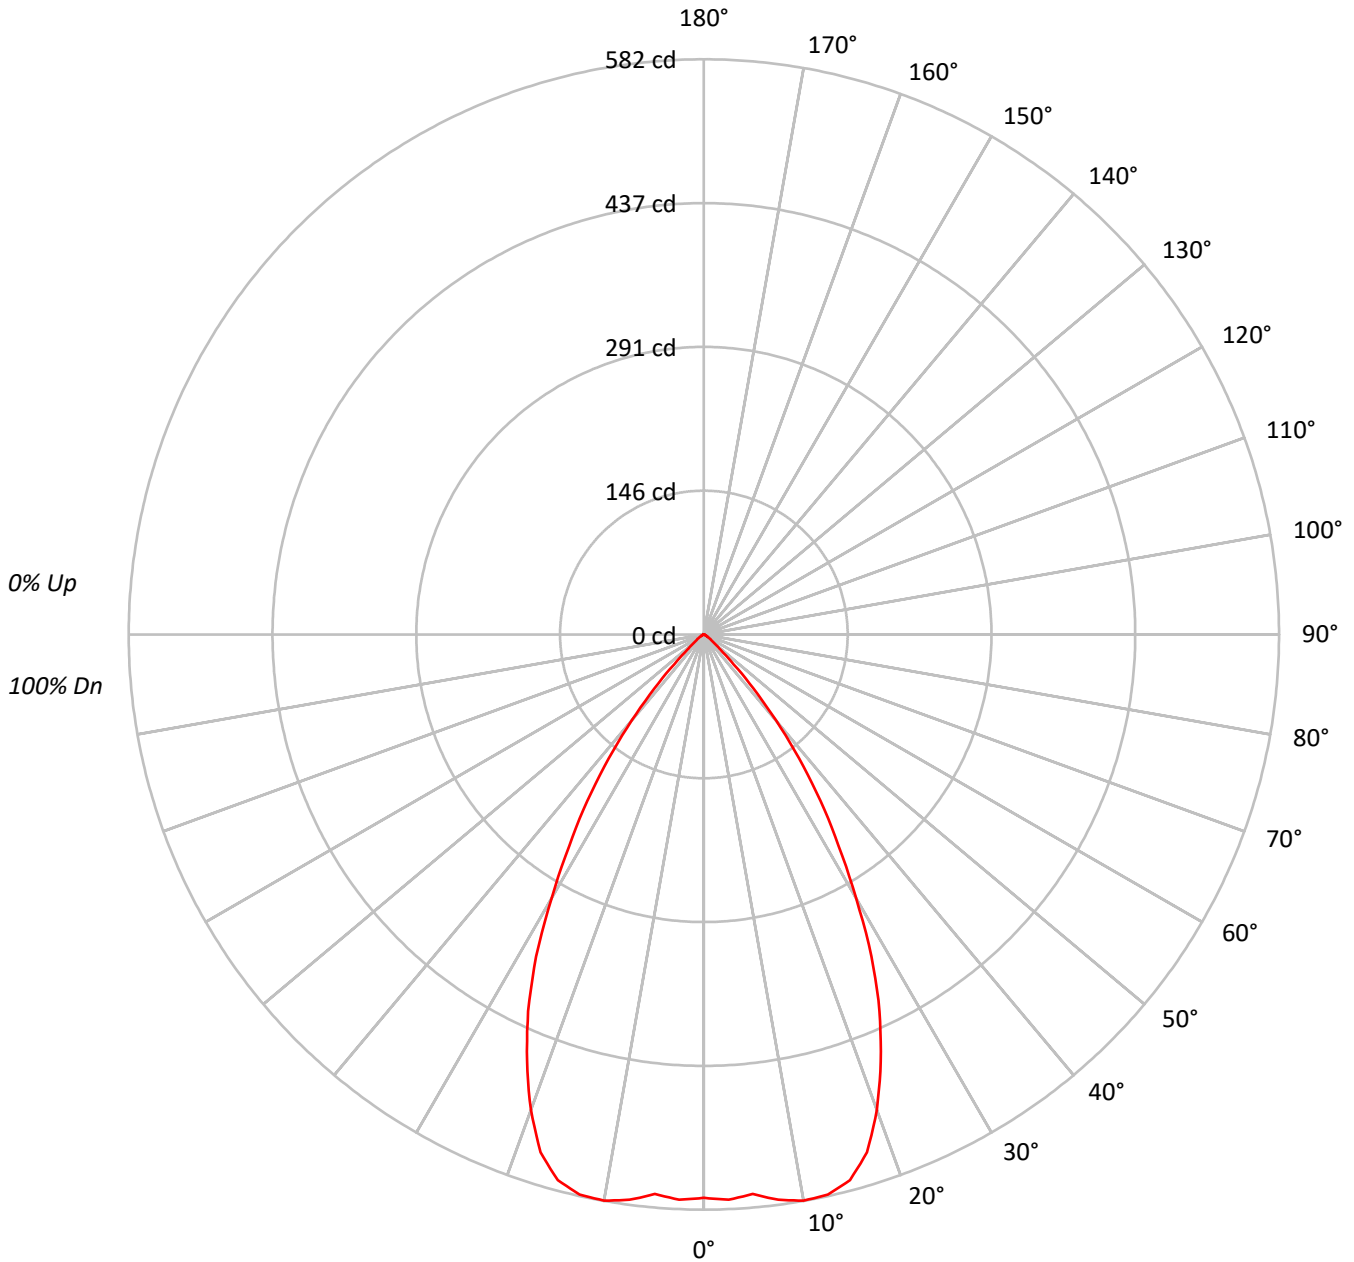



TEST NUMBER: P758709

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	62290
5°	62341
10°	64537
15°	64645
20°	59520
25°	50718
30°	38820
35°	27423
40°	16188
45°	6567
50°	2380
55°	1333
60°	765
65°	414
70°	447
75°	338
80°	378
85°	251

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6567 cd/sqm



TEST NUMBER: P758709

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	54.9	9.5
10°-20°	158.4	27.3
20°-30°	190.0	32.8
30°-40°	127.7	22.1
40°-50°	38.2	6.6
50°-60°	6.7	1.2
60°-70°	1.9	0.3
70°-80°	0.9	0.2
80°-90°	0.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	403.3	69.6
0°-40°	530.9	91.7
0°-60°	575.9	99.5
0°-90°	579.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	579.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	570	
5°	568	55
15°	572	158
25°	421	190
35°	206	128
45°	42	38
55°	7	7
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P758709

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	570.1
2.5°	572.5
5°	568.4
7.5°	577.0
10°	581.7
12.5°	580.6
15°	571.5
17.5°	549.3
20°	511.9
22.5°	467.8
25°	420.7
27.5°	367.4
30°	307.7
32.5°	253.6
35°	205.6
37.5°	158.2
40°	113.5
42.5°	74.1
45°	42.5
47.5°	22.5
50°	14.0
52.5°	9.7
55°	7.0
57.5°	5.0
60°	3.5
62.5°	2.3
65°	1.6
67.5°	1.4
70°	1.4
72.5°	1.0
75°	0.8
77.5°	0.7
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)