

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758713

Luminaire Tested: LD6D05D010-EU6DR650210IC9030-6LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P758713
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR650210IC9030-6LBS1H
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 609.5 lumens
Efficiency: N/A
Efficacy: 81.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758713
CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBS1H

Luminous Intensity Polar Plot

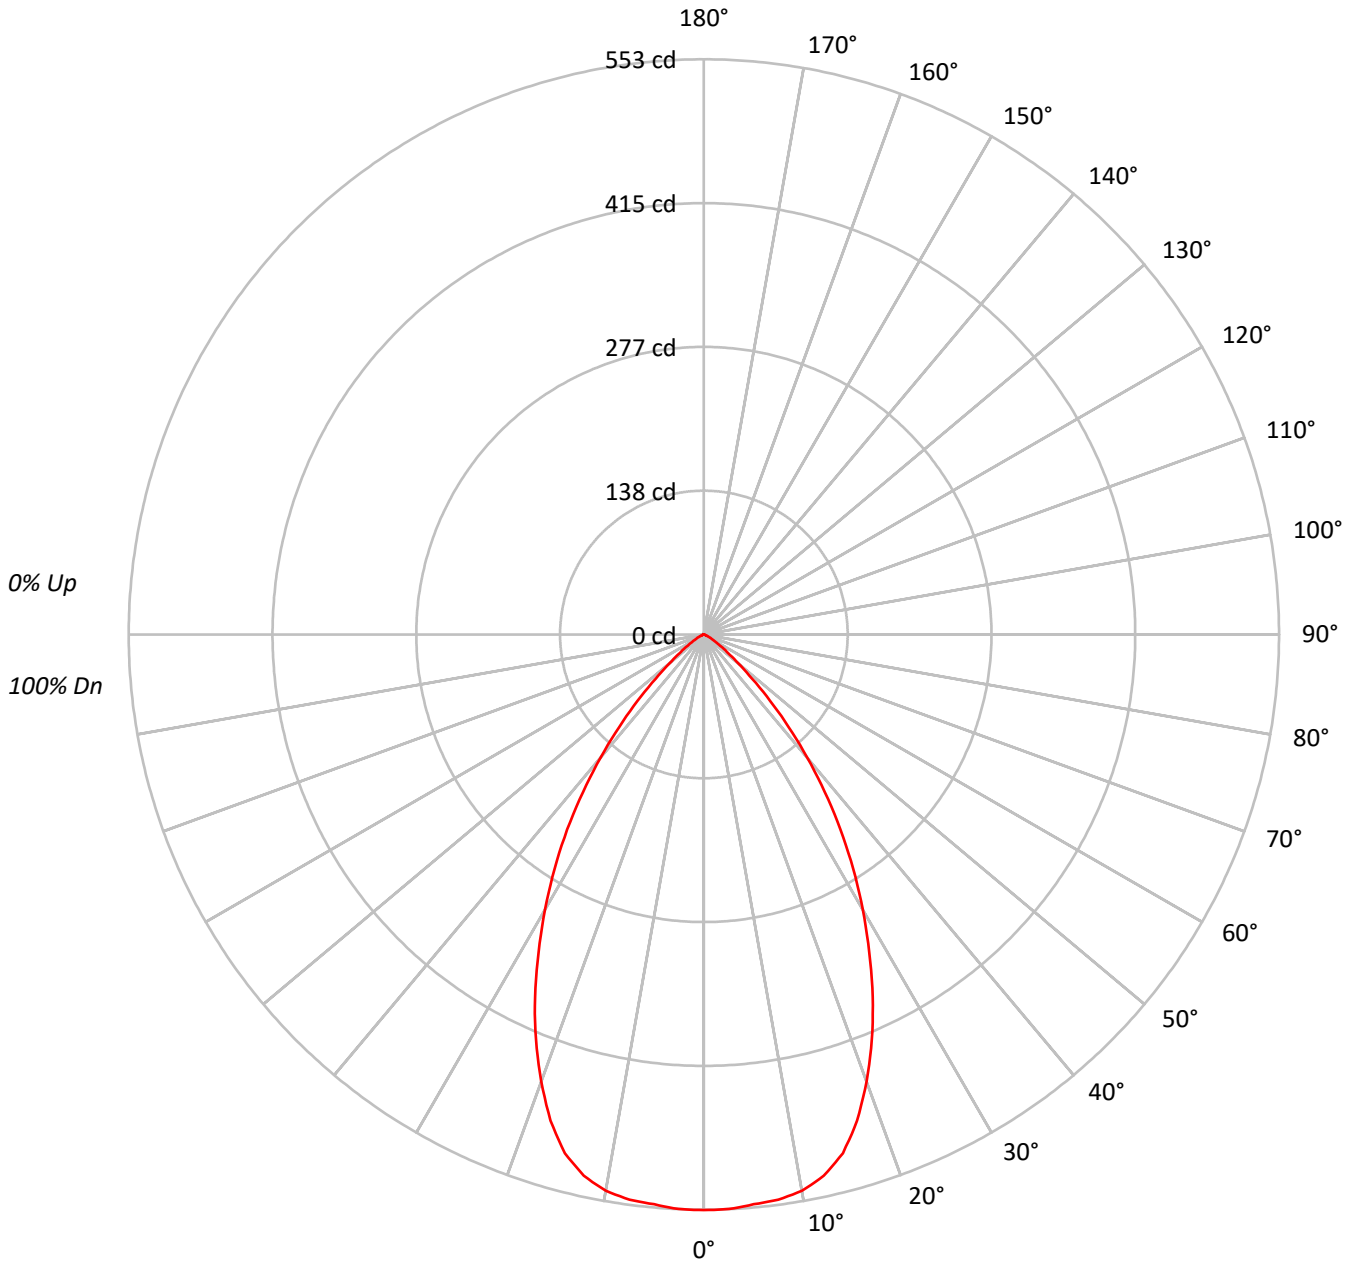



TEST NUMBER: P758713
 CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	32321
5°	32239
10°	32214
15°	31218
20°	28422
25°	24765
30°	20596
35°	16327
40°	11779
45°	7442
50°	3880
55°	2057
60°	1086
65°	594
70°	256
75°	271
80°	202
85°	134

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7442 cd/sqm



TEST NUMBER: P758713

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	52.3	8.6
10°-20°	143.3	23.5
20°-30°	175.2	28.7
30°-40°	142.2	23.3
40°-50°	70.8	11.6
50°-60°	19.7	3.2
60°-70°	4.5	0.7
70°-80°	1.2	0.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	370.8	60.8
0°-40°	513.0	84.2
0°-60°	603.5	99.0
0°-90°	609.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	609.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	553	
5°	550	52
15°	516	143
25°	384	175
35°	229	142
45°	90	71
55°	20	20
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P758713
CATALOG NUMBER: LD6D05D010-EU6DR650210IC9030-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	553.4
2.5°	553.0
5°	549.9
7.5°	548.1
10°	543.2
12.5°	533.1
15°	516.3
17.5°	490.2
20°	457.3
22.5°	421.9
25°	384.3
27.5°	344.2
30°	305.4
32.5°	267.2
35°	229.0
37.5°	190.8
40°	154.5
42.5°	120.5
45°	90.1
47.5°	62.8
50°	42.7
52.5°	29.4
55°	20.2
57.5°	13.6
60°	9.3
62.5°	6.4
65°	4.3
67.5°	2.2
70°	1.5
72.5°	1.4
75°	1.2
77.5°	0.8
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)