

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758176

Luminaire Tested: LD6D05D010-EU6DR300210IC9035-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P758176
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR300210IC9035-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 681.3 lumens
Efficiency: N/A
Efficacy: 90.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758176

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9035-6LBDP1H

Luminous Intensity Polar Plot

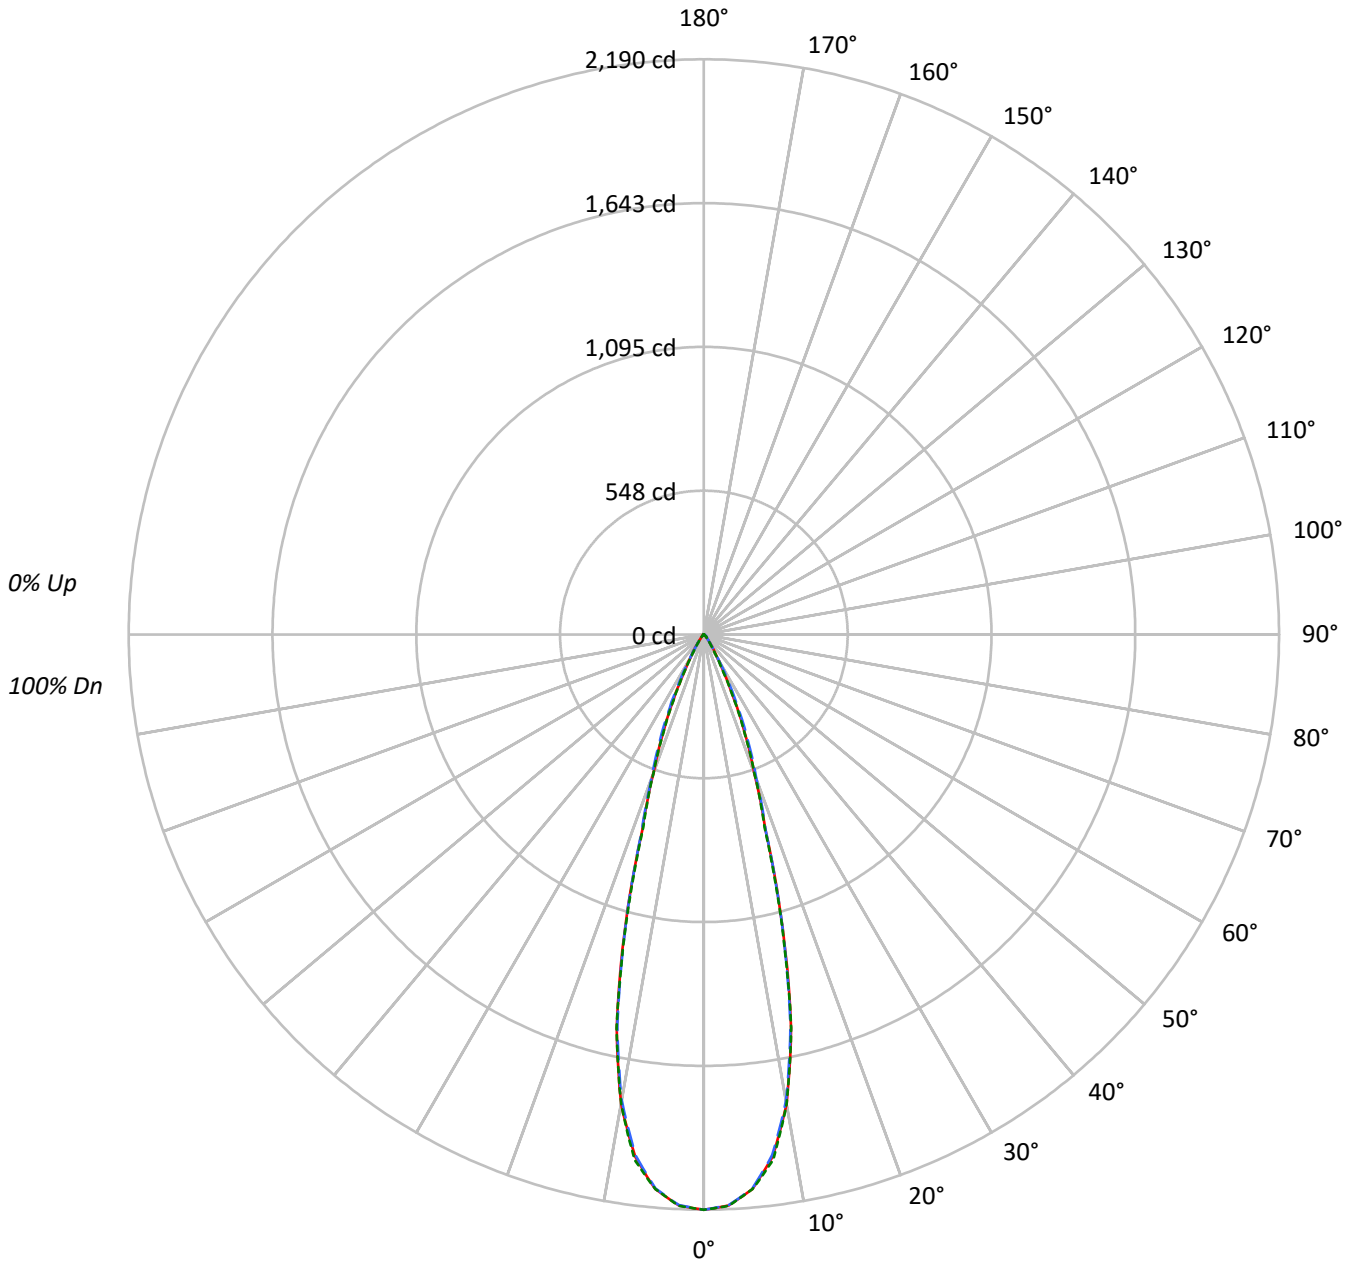



TEST NUMBER: P758176

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9035-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	167668	167668	167668
5°	162853	162669	162861
10°	141062	140059	141023
15°	92033	91542	91075
20°	45762	47481	45705
25°	23057	25996	22575
30°	9227	10058	8043
35°	4280	4102	3439
40°	1849	2058	1739
45°	1299	1624	1310
50°	453	1179	476
55°	254	494	280
60°	184	214	184
65°	109	109	109
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1624 cd/sqm



TEST NUMBER: P758176

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9035-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	192.6	28.3
10°-20°	310.2	45.5
20°-30°	134.1	19.7
30°-40°	30.6	4.5
40°-50°	10.5	1.5
50°-60°	2.6	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	636.9	93.5
0°-40°	667.4	98.0
0°-60°	680.5	99.9
0°-90°	681.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	681.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2190	2190	2190	2190	2190	
5°	2120	2118	2117	2122	2120	193
15°	1161	1147	1155	1151	1149	311
25°	273	283	308	276	267	131
35°	46	47	44	44	37	31
45°	12	15	15	15	12	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P758176

CATALOG NUMBER: LD6D05D010-EU6DR300210IC9035-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2190.5	2190.5	2190.5	2190.5	2190.5
2.5°	2176.0	2174.5	2175.3	2176.4	2176.9
5°	2119.5	2117.5	2117.1	2121.5	2119.6
7.5°	2005.6	2002.7	1998.3	2008.3	2017.7
10°	1814.9	1811.6	1802.0	1806.8	1814.4
12.5°	1533.2	1522.7	1522.6	1537.6	1535.6
15°	1161.4	1147.4	1155.2	1151.4	1149.3
17.5°	781.0	775.6	786.0	782.8	769.4
20°	561.8	563.2	582.9	573.0	561.1
22.5°	409.9	415.0	438.4	412.9	403.5
25°	273.0	283.3	307.8	276.0	267.3
27.5°	167.9	172.6	197.4	165.8	161.0
30°	104.4	102.0	113.8	97.6	91.0
32.5°	68.5	65.5	69.3	62.2	56.8
35°	45.8	46.8	43.9	43.5	36.8
37.5°	28.6	32.9	29.0	31.0	23.7
40°	18.5	23.9	20.6	22.7	17.4
42.5°	15.2	18.4	16.9	17.9	15.5
45°	12.0	15.0	15.0	15.0	12.1
47.5°	6.6	10.0	12.8	10.2	7.1
50°	3.8	5.0	9.9	5.3	4.0
52.5°	2.6	2.9	6.8	3.0	2.7
55°	1.9	2.1	3.7	2.2	2.1
57.5°	1.5	1.6	1.9	1.6	1.5
60°	1.2	1.2	1.4	1.3	1.2
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.6	0.6	0.6	0.6	0.6
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)