

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758643

Luminaire Tested: LD6D05D010-EU6DR600210IC9035-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P758643  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D05D010-EU6DR600210IC9035-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 550.9 lumens  
Efficiency: N/A  
Efficacy: 73.5 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 7.5  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P758643  
CATALOG NUMBER: LD6D05D010-EU6DR600210IC9035-6LBDP1B

### Luminous Intensity Polar Plot

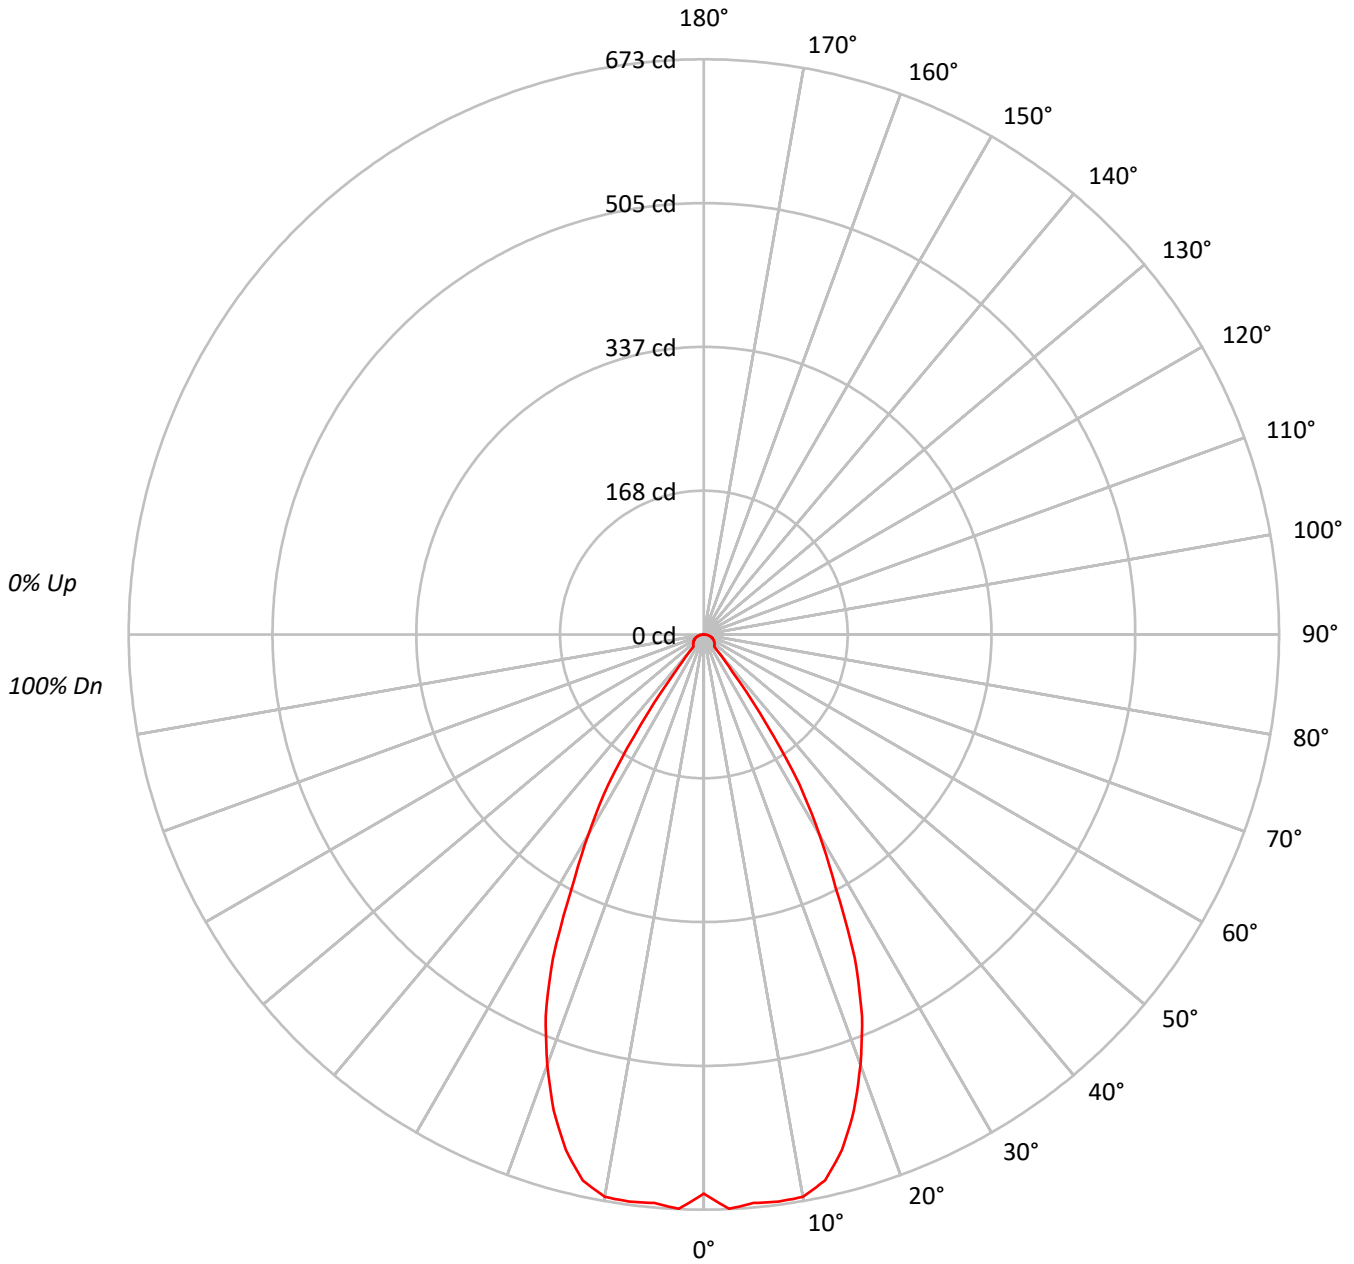



TEST NUMBER: P758643

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9035-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93				93															
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86				86															
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80				80															
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75				75															
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70				70															
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66				66															
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62				62															
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59				59															
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55				55															
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53				53															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	71489
5°	73243
10°	74134
15°	70618
20°	62264
25°	50356
30°	34064
35°	17073
40°	2767
45°	2704
50°	2771
55°	2800
60°	2884
65°	2947
70°	3035
75°	3039
80°	2957
85°	2382

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 72.5°  
 Luminance: 3052 cd/sqm



TEST NUMBER: P758643

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9035-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	63.8	11.6
10°-20°	172.7	31.3
20°-30°	185.8	33.7
30°-40°	80.8	14.7
40°-50°	13.6	2.5
50°-60°	13.2	2.4
60°-70°	11.3	2.0
70°-80°	7.6	1.4
80°-90°	2.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	422.3	76.7
0°-40°	503.1	91.3
0°-60°	529.8	96.2
0°-90°	550.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	550.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	654	
5°	668	64
15°	624	173
25°	418	186
35°	128	81
45°	18	14
55°	15	13
65°	11	11
75°	7	8
85°	2	2
90°	0	



TEST NUMBER: P758643

CATALOG NUMBER: LD6D05D010-EU6DR600210IC9035-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	654.3
2.5°	672.6
5°	667.8
7.5°	669.3
10°	668.2
12.5°	654.4
15°	624.3
17.5°	584.0
20°	535.5
22.5°	483.6
25°	417.7
27.5°	334.1
30°	270.0
32.5°	208.1
35°	128.0
37.5°	54.8
40°	19.4
42.5°	17.9
45°	17.5
47.5°	17.0
50°	16.3
52.5°	15.5
55°	14.7
57.5°	14.0
60°	13.2
62.5°	12.3
65°	11.4
67.5°	10.5
70°	9.5
72.5°	8.4
75°	7.2
77.5°	6.0
80°	4.7
82.5°	3.3
85°	1.9
87.5°	0.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)