

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P758749

Luminaire Tested: LD6D05D010-EU6DR650210IC9050-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P758749
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D05D010-EU6DR650210IC9050-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 651.8 lumens
Efficiency: N/A
Efficacy: 86.9 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 7.5
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P758749

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9050-6LBDP1LI

Luminous Intensity Polar Plot

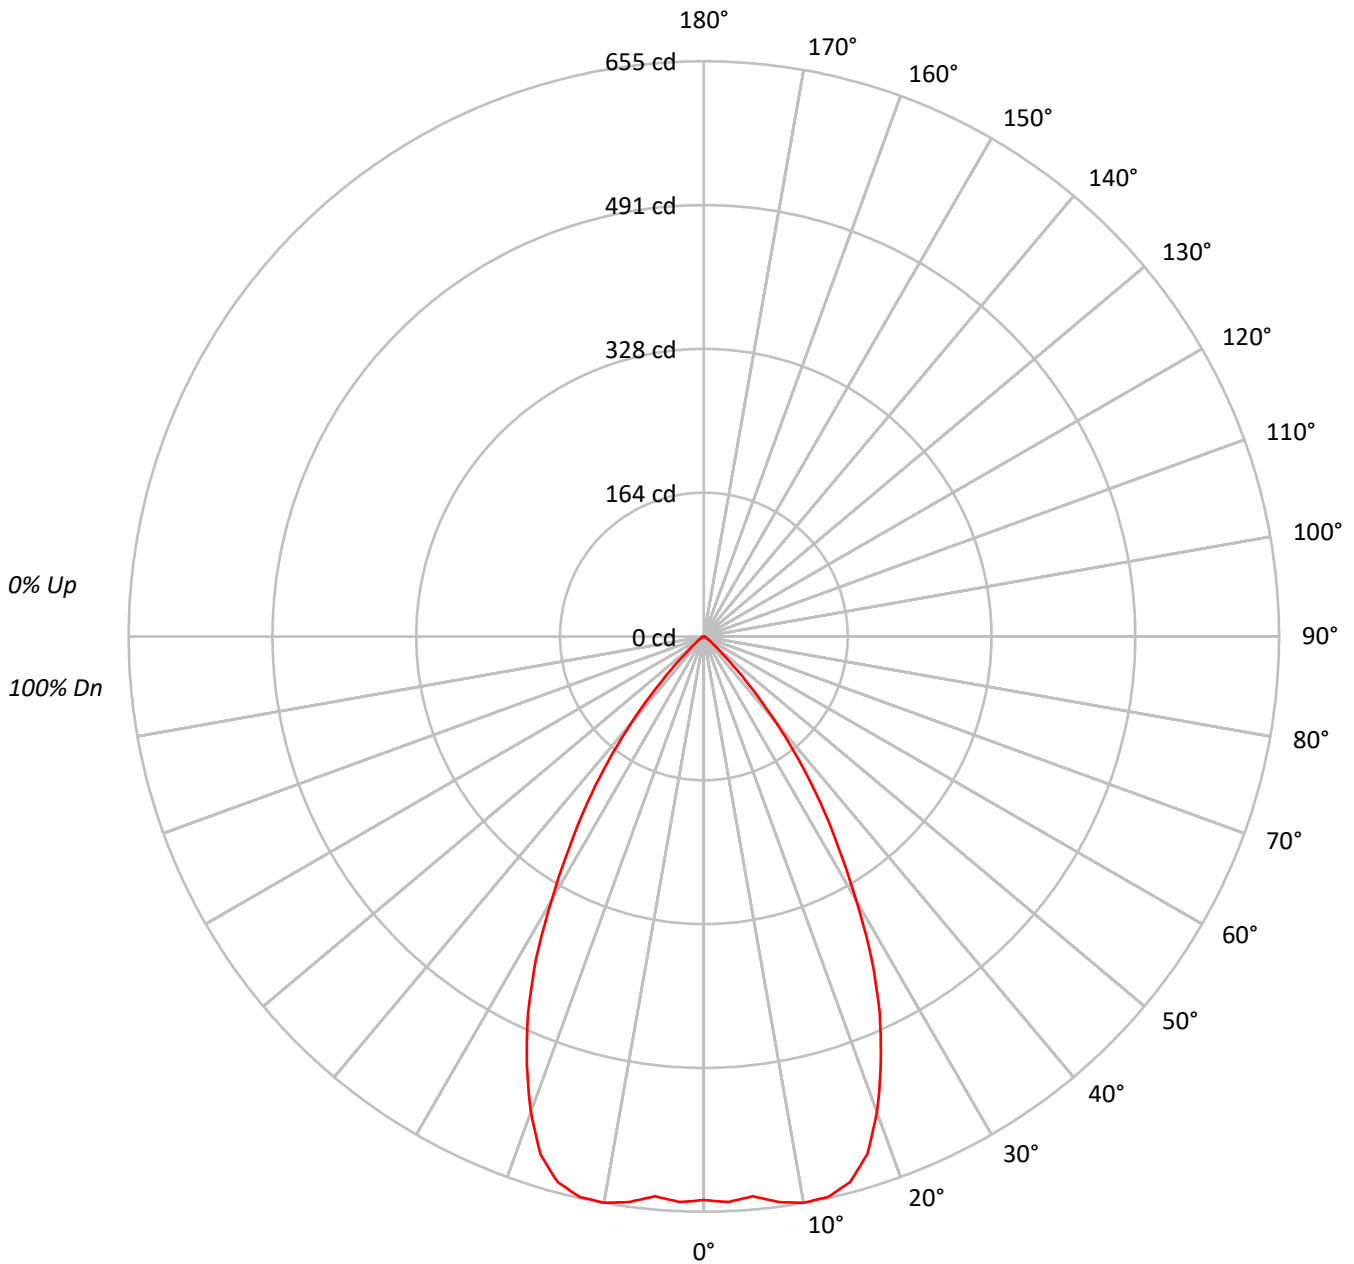



TEST NUMBER: P758749

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9050-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	70124
5°	70172
10°	72648
15°	72767
20°	66996
25°	57083
30°	43690
35°	30878
40°	18228
45°	7401
50°	2686
55°	1486
60°	852
65°	465
70°	479
75°	380
80°	378
85°	376

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 7401 cd/sqm



TEST NUMBER: P758749

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9050-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	61.8	9.5
10°-20°	178.3	27.3
20°-30°	213.9	32.8
30°-40°	143.7	22.0
40°-50°	43.0	6.6
50°-60°	7.6	1.2
60°-70°	2.2	0.3
70°-80°	1.0	0.2
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	453.9	69.6
0°-40°	597.6	91.7
0°-60°	648.2	99.5
0°-90°	651.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	651.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	642	
5°	640	62
15°	643	178
25°	474	214
35°	232	144
45°	48	43
55°	8	8
65°	2	2
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P758749

CATALOG NUMBER: LD6D05D010-EU6DR650210IC9050-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	641.8
2.5°	644.5
5°	639.8
7.5°	649.5
10°	654.8
12.5°	653.5
15°	643.3
17.5°	618.3
20°	576.2
22.5°	526.6
25°	473.5
27.5°	413.6
30°	346.3
32.5°	285.4
35°	231.5
37.5°	178.1
40°	127.8
42.5°	83.4
45°	47.9
47.5°	25.3
50°	15.8
52.5°	10.9
55°	7.8
57.5°	5.7
60°	3.9
62.5°	2.6
65°	1.8
67.5°	1.7
70°	1.5
72.5°	1.2
75°	0.9
77.5°	0.8
80°	0.6
82.5°	0.5
85°	0.3
87.5°	0.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)