

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768804

Luminaire Tested: LD6D60D010-EU6DR3555659027-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P768804
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR3555659027-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6638.2 lumens
Efficiency: N/A
Efficacy: 103.1 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P768804
CATALOG NUMBER: LD6D60D010-EU6DR3555659027-6LBDP1H

Luminous Intensity Polar Plot

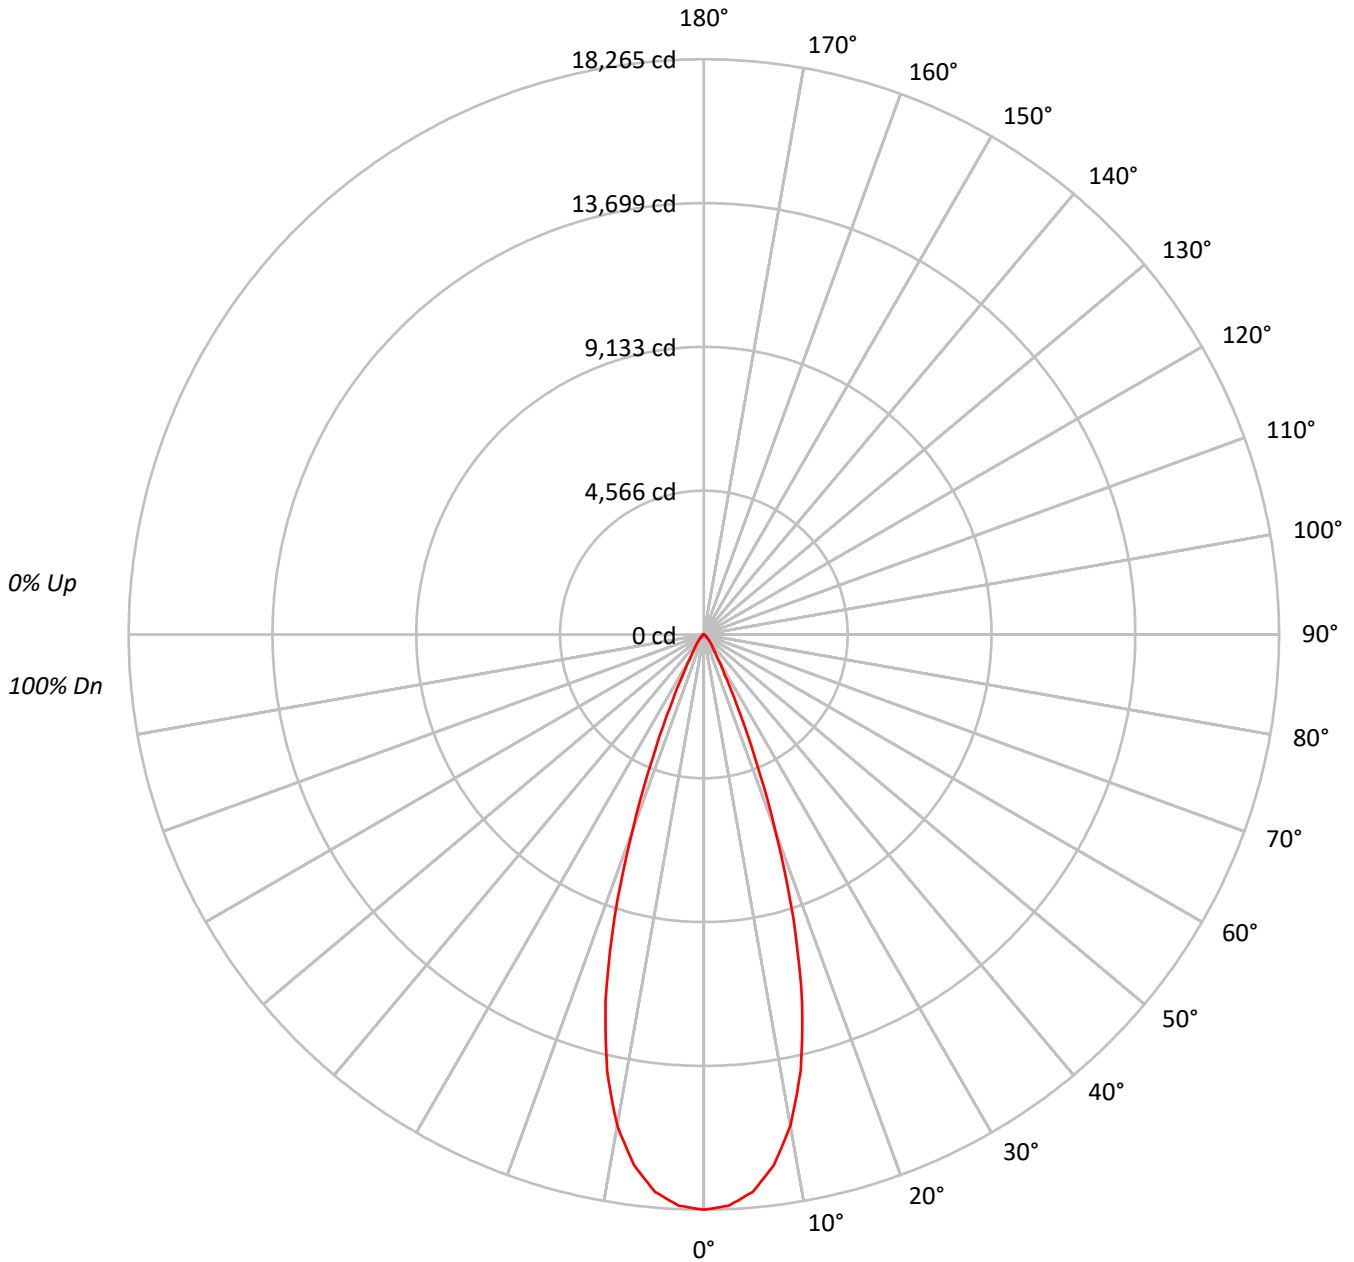



TEST NUMBER: P768804

CATALOG NUMBER: LD6D60D010-EU6DR3555659027-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96																			
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92																			
3	106	101	97	94	105	100	96	93	97	95	92	95	93	91	93	91	89	88																			
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84																			
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81																			
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78																			
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75																			
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72																			
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70																			
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1995648
5°	1948761
10°	1756346
15°	1363206
20°	773191
25°	300811
30°	112222
35°	61516
40°	40207
45°	24476
50°	15570
55°	11010
60°	8063
65°	4369
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24476 cd/sqm



TEST NUMBER: P768804

CATALOG NUMBER: LD6D60D010-EU6DR3555659027-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1634.1	24.6
10°-20°	3190.5	48.1
20°-30°	1301.2	19.6
30°-40°	311.4	4.7
40°-50°	129.8	2.0
50°-60°	53.7	0.8
60°-70°	16.8	0.3
70°-80°	0.4	0.0
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6125.9	92.3
0°-40°	6437.3	97.0
0°-60°	6620.7	99.7
0°-90°	6638.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6638.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	18265	
5°	17768	###
15°	12052	3191
25°	2495	1301
35°	461	311
45°	158	130
55°	58	54
65°	17	17
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P768804
CATALOG NUMBER: LD6D60D010-EU6DR3555659027-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	18265.0
2.5°	18155.4
5°	17768.0
7.5°	16995.0
10°	15830.6
12.5°	14191.1
15°	12051.5
17.5°	9434.8
20°	6649.8
22.5°	4240.3
25°	2495.2
27.5°	1410.4
30°	889.5
32.5°	624.5
35°	461.2
37.5°	356.6
40°	281.9
42.5°	217.1
45°	158.4
47.5°	118.5
50°	91.6
52.5°	72.7
55°	57.8
57.5°	46.8
60°	36.9
62.5°	26.9
65°	16.9
67.5°	6.0
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)