

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769273

Luminaire Tested: LD6D60D010-EU6DR6555659027-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P769273  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D60D010-EU6DR6555659027-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6394.3 lumens  
Efficiency: N/A  
Efficacy: 99.3 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P769273  
CATALOG NUMBER: LD6D60D010-EU6DR6555659027-6LBDP1LI

### Luminous Intensity Polar Plot

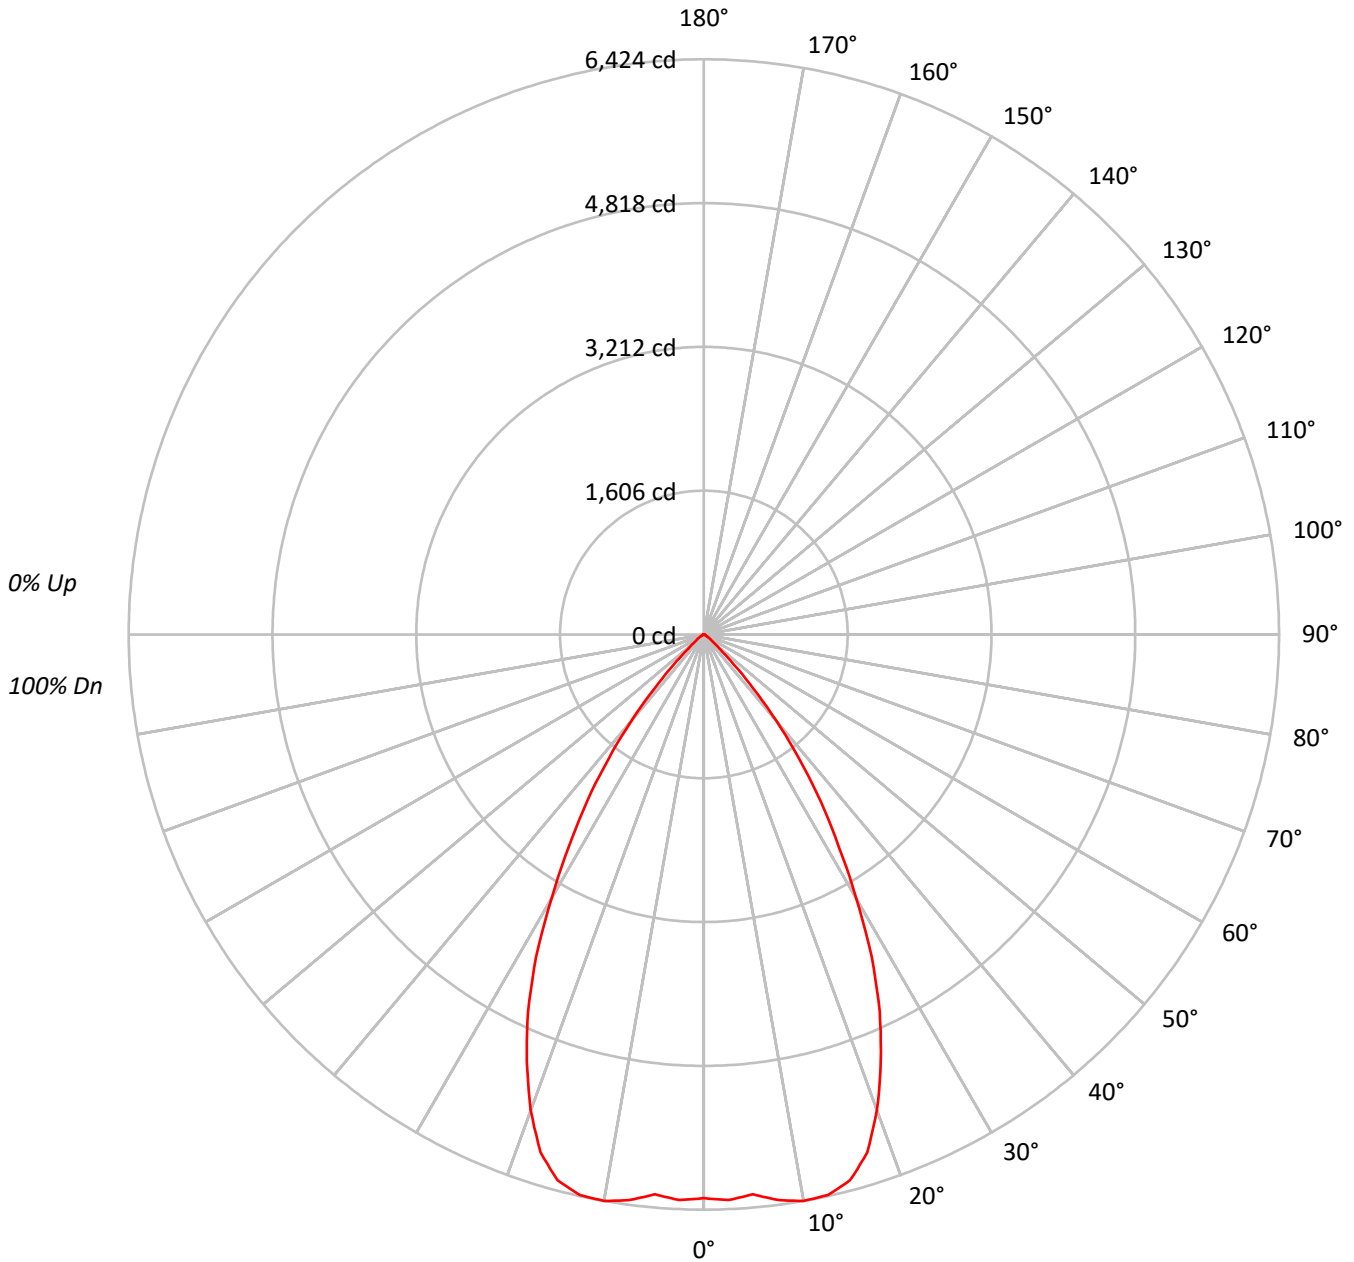



TEST NUMBER: P769273

CATALOG NUMBER: LD6D60D010-EU6DR6555659027-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	687862
5°	688428
10°	712675
15°	713846
20°	657221
25°	559982
30°	428691
35°	302859
40°	178772
45°	72577
50°	26313
55°	14649
60°	8413
65°	4628
70°	4856
75°	3757
80°	3964
85°	3385

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 72577 cd/sqm



TEST NUMBER: P769273

CATALOG NUMBER: LD6D60D010-EU6DR6555659027-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	606.2	9.5
10°-20°	1748.7	27.3
20°-30°	2098.1	32.8
30°-40°	1409.9	22.0
40°-50°	422.1	6.6
50°-60°	74.5	1.2
60°-70°	21.2	0.3
70°-80°	10.4	0.2
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4452.9	69.6
0°-40°	5862.9	91.7
0°-60°	6359.5	99.5
0°-90°	6394.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6394.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6296	
5°	6277	606
15°	6311	1749
25°	4645	2098
35°	2271	1410
45°	470	422
55°	77	75
65°	18	21
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P769273

CATALOG NUMBER: LD6D60D010-EU6DR6555659027-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6295.6
2.5°	6322.5
5°	6276.8
7.5°	6371.7
10°	6423.6
12.5°	6411.0
15°	6310.8
17.5°	6065.7
20°	5652.4
22.5°	5165.7
25°	4645.0
27.5°	4057.2
30°	3397.9
32.5°	2800.2
35°	2270.6
37.5°	1747.2
40°	1253.4
42.5°	818.6
45°	469.7
47.5°	248.7
50°	154.8
52.5°	107.4
55°	76.9
57.5°	55.5
60°	38.5
62.5°	25.1
65°	17.9
67.5°	16.1
70°	15.2
72.5°	11.6
75°	8.9
77.5°	8.1
80°	6.3
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)