

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769351

Luminaire Tested: LD6D60D010-EU6DR7055659027-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P769351
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR7055659027-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7366.0 lumens
Efficiency: N/A
Efficacy: 114.4 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P769351
CATALOG NUMBER: LD6D60D010-EU6DR7055659027-6LBDP1LI

Luminous Intensity Polar Plot

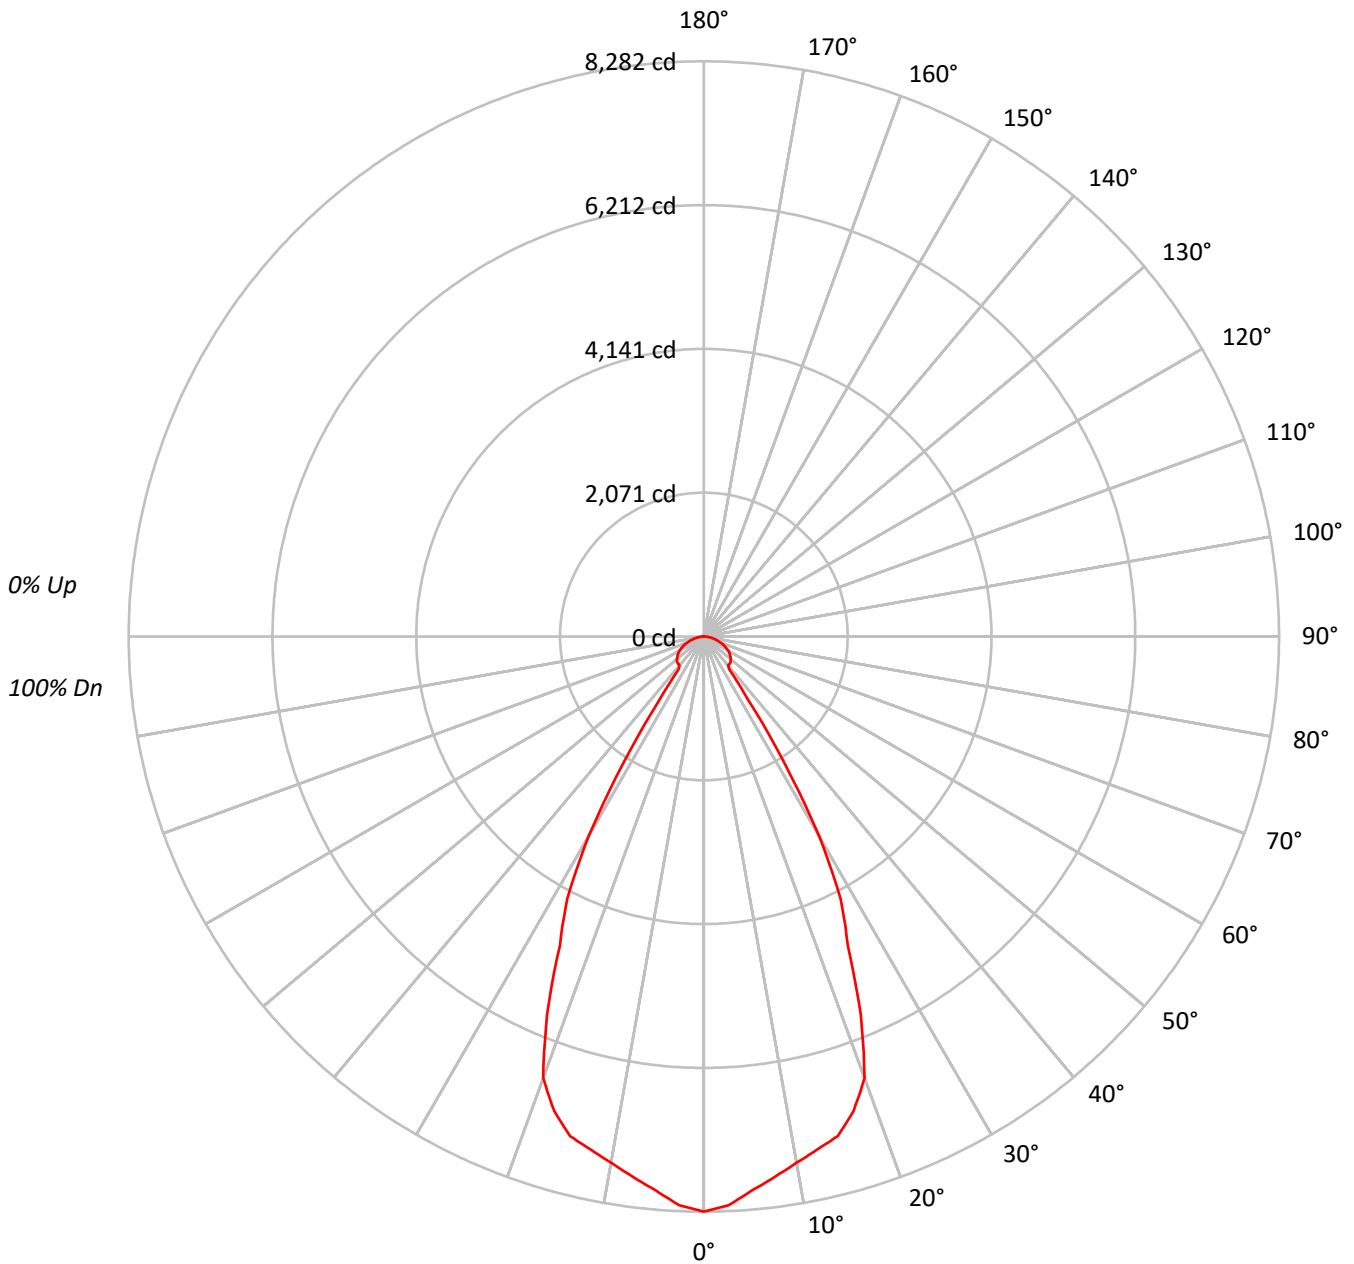



TEST NUMBER: P769351

CATALOG NUMBER: LD6D60D010-EU6DR7055659027-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | 20 | | | | | | | | | |
| RC | 80 | | | | | | | | | 50 | | | | | | | | | 30 | | | | | | | | | 10 | | | | | | | | | 0 |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 | | | | | | | | | | | | | | | | |
| RCR | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | | | | | | | | | | | | | | | | | |
| 1 | 112 | 109 | 106 | 103 | 110 | 107 | 104 | 102 | 103 | 101 | 99 | 99 | 97 | 96 | 95 | 94 | 93 | 91 | | | | | | | | | | | | | | | | | | | |
| 2 | 106 | 100 | 95 | 91 | 103 | 98 | 94 | 90 | 95 | 91 | 88 | 92 | 89 | 86 | 89 | 87 | 85 | 83 | | | | | | | | | | | | | | | | | | | |
| 3 | 100 | 92 | 87 | 82 | 98 | 91 | 86 | 81 | 88 | 84 | 80 | 86 | 82 | 79 | 83 | 80 | 78 | 76 | | | | | | | | | | | | | | | | | | | |
| 4 | 94 | 86 | 80 | 75 | 92 | 85 | 79 | 74 | 82 | 77 | 73 | 80 | 76 | 73 | 78 | 75 | 72 | 70 | | | | | | | | | | | | | | | | | | | |
| 5 | 89 | 80 | 74 | 69 | 87 | 79 | 73 | 69 | 77 | 72 | 68 | 75 | 71 | 67 | 74 | 70 | 67 | 65 | | | | | | | | | | | | | | | | | | | |
| 6 | 85 | 75 | 68 | 64 | 83 | 74 | 68 | 64 | 73 | 67 | 63 | 71 | 66 | 63 | 70 | 66 | 62 | 61 | | | | | | | | | | | | | | | | | | | |
| 7 | 80 | 70 | 64 | 59 | 79 | 70 | 64 | 59 | 68 | 63 | 59 | 67 | 62 | 59 | 66 | 62 | 58 | 57 | | | | | | | | | | | | | | | | | | | |
| 8 | 77 | 66 | 60 | 56 | 75 | 66 | 60 | 56 | 65 | 59 | 55 | 64 | 59 | 55 | 63 | 58 | 55 | 53 | | | | | | | | | | | | | | | | | | | |
| 9 | 73 | 63 | 57 | 52 | 72 | 62 | 56 | 52 | 61 | 56 | 52 | 60 | 55 | 52 | 60 | 55 | 52 | 50 | | | | | | | | | | | | | | | | | | | |
| 10 | 70 | 59 | 53 | 49 | 69 | 59 | 53 | 49 | 58 | 53 | 49 | 57 | 52 | 49 | 57 | 52 | 49 | 48 | | | | | | | | | | | | | | | | | | | |

AVERAGE LUMINANCE (cd/sqm):

| | 0° |
|-----|--------|
| 0° | 904843 |
| 5° | 877962 |
| 10° | 853488 |
| 15° | 842289 |
| 20° | 786528 |
| 25° | 590881 |
| 30° | 417702 |
| 35° | 147961 |
| 40° | 77805 |
| 45° | 82868 |
| 50° | 85806 |
| 55° | 87416 |
| 60° | 87955 |
| 65° | 86091 |
| 70° | 81270 |
| 75° | 75270 |
| 80° | 66822 |
| 85° | 54282 |

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 87990 cd/sqm



TEST NUMBER: P769351

CATALOG NUMBER: LD6D60D010-EU6DR7055659027-6LBDP1LI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 755.0 | 10.3 |
| 10°-20° | 2071.0 | 28.1 |
| 20°-30° | 2280.9 | 31.0 |
| 30°-40° | 871.5 | 11.8 |
| 40°-50° | 411.5 | 5.6 |
| 50°-60° | 409.1 | 5.6 |
| 60°-70° | 327.5 | 4.4 |
| 70°-80° | 188.2 | 2.6 |
| 80°-90° | 51.2 | 0.7 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 5107.0 | 69.3 |
| 0°-40° | 5978.5 | 81.2 |
| 0°-60° | 6799.1 | 92.3 |
| 0°-90° | 7366.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 7366.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 8282 | |
| 5° | 8005 | 755 |
| 15° | 7446 | 2071 |
| 25° | 4901 | 2281 |
| 35° | 1109 | 871 |
| 45° | 536 | 411 |
| 55° | 459 | 409 |
| 65° | 333 | 328 |
| 75° | 178 | 188 |
| 85° | 43 | 51 |
| 90° | 0 | |



TEST NUMBER: P769351

CATALOG NUMBER: LD6D60D010-EU6DR7055659027-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|--------|
| 0° | 8281.5 |
| 2.5° | 8195.0 |
| 5° | 8004.9 |
| 7.5° | 7846.2 |
| 10° | 7692.8 |
| 12.5° | 7563.0 |
| 15° | 7446.3 |
| 17.5° | 7164.4 |
| 20° | 6764.5 |
| 22.5° | 5901.7 |
| 25° | 4901.3 |
| 27.5° | 4266.6 |
| 30° | 3310.8 |
| 32.5° | 2138.6 |
| 35° | 1109.3 |
| 37.5° | 599.2 |
| 40° | 545.5 |
| 42.5° | 541.5 |
| 45° | 536.3 |
| 47.5° | 524.5 |
| 50° | 504.8 |
| 52.5° | 482.5 |
| 55° | 458.9 |
| 57.5° | 432.7 |
| 60° | 402.5 |
| 62.5° | 368.4 |
| 65° | 333.0 |
| 67.5° | 293.7 |
| 70° | 254.4 |
| 72.5° | 215.0 |
| 75° | 178.3 |
| 77.5° | 140.3 |
| 80° | 106.2 |
| 82.5° | 74.7 |
| 85° | 43.3 |
| 87.5° | 17.0 |
| 90° | 0.0 |

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)