Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled data based on original data using

LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769133

Luminaire Tested: LD6D60D010-EU6DR5555659030-6LBS1H

Issue Date: 2/2/2024

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Test Information

Test Method:	LM-79-2019
Report Number:	P769133
	TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)
Test Lab:	COOPER LIGHTING SOLUTIONS
Issue Date:	2/2/2024
Manufacturer:	COOPER LIGHTING SOLUTIONS
Product Line:	PORTFOLIO
Catalog Number:	LD6D60D010-EU6DR5555659030-6LBS1H
Description:	6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 55° OPTIC
Light Source:	(1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver:	-

Summary

Lumens per Lamp:	N/A
Luminaire Lumens:	7706.8 lumens
Efficiency:	N/A
Efficacy:	119.7 lumens/watt
Spacing Criteria (0/90/45):	0.89 / 0.89 / 0.87
Luminous Opening:	Circular (Dia: 0.35' x H: 0')
CIE Type:	Direct

Input Watts (W):	64.4
Input Voltage (V):	NR
Input Current (Ain):	NR
Voltage Rise (V):	NR
Power Factor:	NR
Total Harmonic Distortion (THDi):	NR
Frequency (hertz):	60
Stabilization Time:	NR
Operation Time:	NR
Ambient Temperature (°C):	NR
Test Distance:	24 FT

Downlight

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P769133
CATALOG NUMBER: LD6D60D010-EU6DR5555659030-6LBS1H

Luminous Intensity Polar Plot

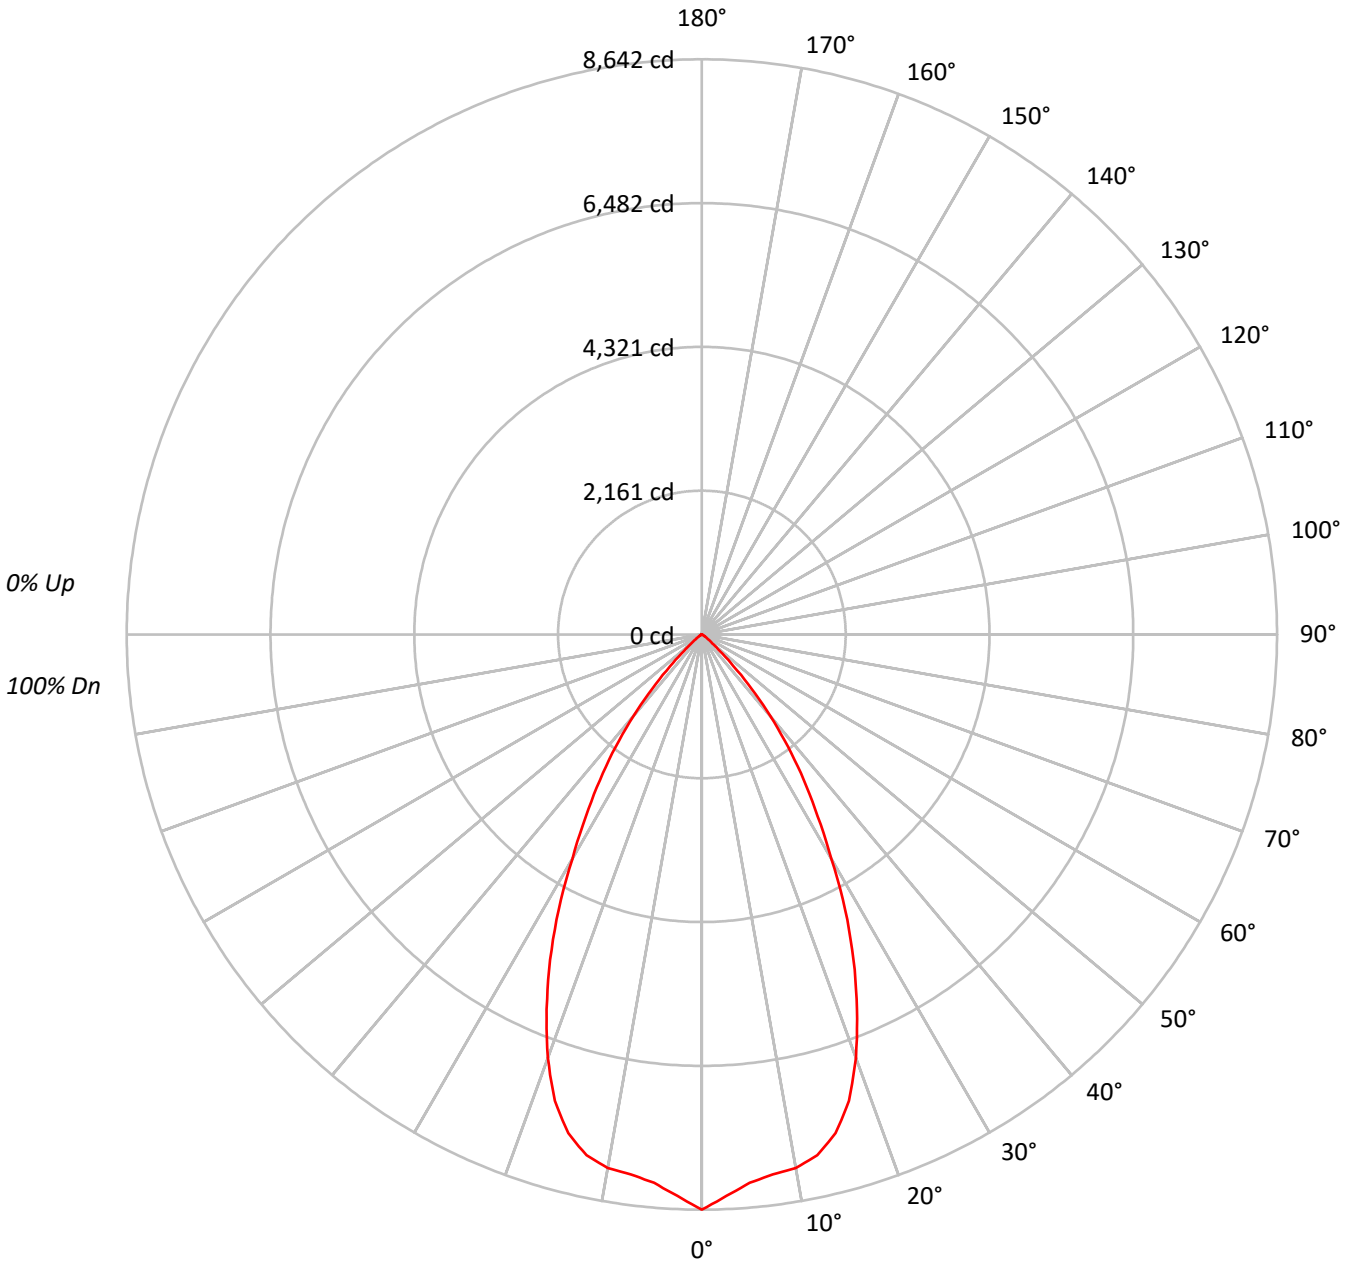

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P769133
CATALOG NUMBER: LD6D60D010-EU6DR5555659030-6LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	944221
5°	906720
10°	903302
15°	877354
20°	786679
25°	650146
30°	491104
35°	356092
40°	227880
45°	104083
50°	34047
55°	14687
60°	6315
65°	827
70°	0
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 104083 cd/sqm

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P769133
CATALOG NUMBER: LD6D60D010-EU6DR5555659030-6LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	786.7	10.2
10°-20°	2146.9	27.9
20°-30°	2446.6	31.7
30°-40°	1665.6	21.6
40°-50°	573.9	7.4
50°-60°	79.4	1.0
60°-70°	7.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5380.2	69.8
0°-40°	7045.8	91.4
0°-60°	7699.1	99.9
0°-90°	7706.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7706.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8642	
5°	8267	787
15°	7756	2147
25°	5393	2447
35°	2670	1666
45°	674	574
55°	77	79
65°	3	8
75°	0	0
85°	0	0
90°	0	

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

TEST NUMBER: P769133
CATALOG NUMBER: LD6D60D010-EU6DR5555659030-6LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8641.9
2.5°	8443.8
5°	8267.1
7.5°	8180.4
10°	8141.8
12.5°	8013.3
15°	7756.3
17.5°	7348.3
20°	6765.8
22.5°	6093.3
25°	5392.9
27.5°	4663.6
30°	3892.6
32.5°	3239.4
35°	2669.7
37.5°	2127.8
40°	1597.7
42.5°	1107.3
45°	673.6
47.5°	363.0
50°	200.3
52.5°	118.9
55°	77.1
57.5°	49.3
60°	28.9
62.5°	12.9
65°	3.2
67.5°	1.1
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Report Generated By 670245859 / DESKTOP-T8S5UU9

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

0°-180°

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

(END OF REPORT)