

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769368

Luminaire Tested: LD6D60D010-EU6DR7055659030-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P769368  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D60D010-EU6DR7055659030-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7988.0 lumens  
Efficiency: N/A  
Efficacy: 124.0 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 64.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P769368  
CATALOG NUMBER: LD6D60D010-EU6DR7055659030-6LBS1LI

### Luminous Intensity Polar Plot

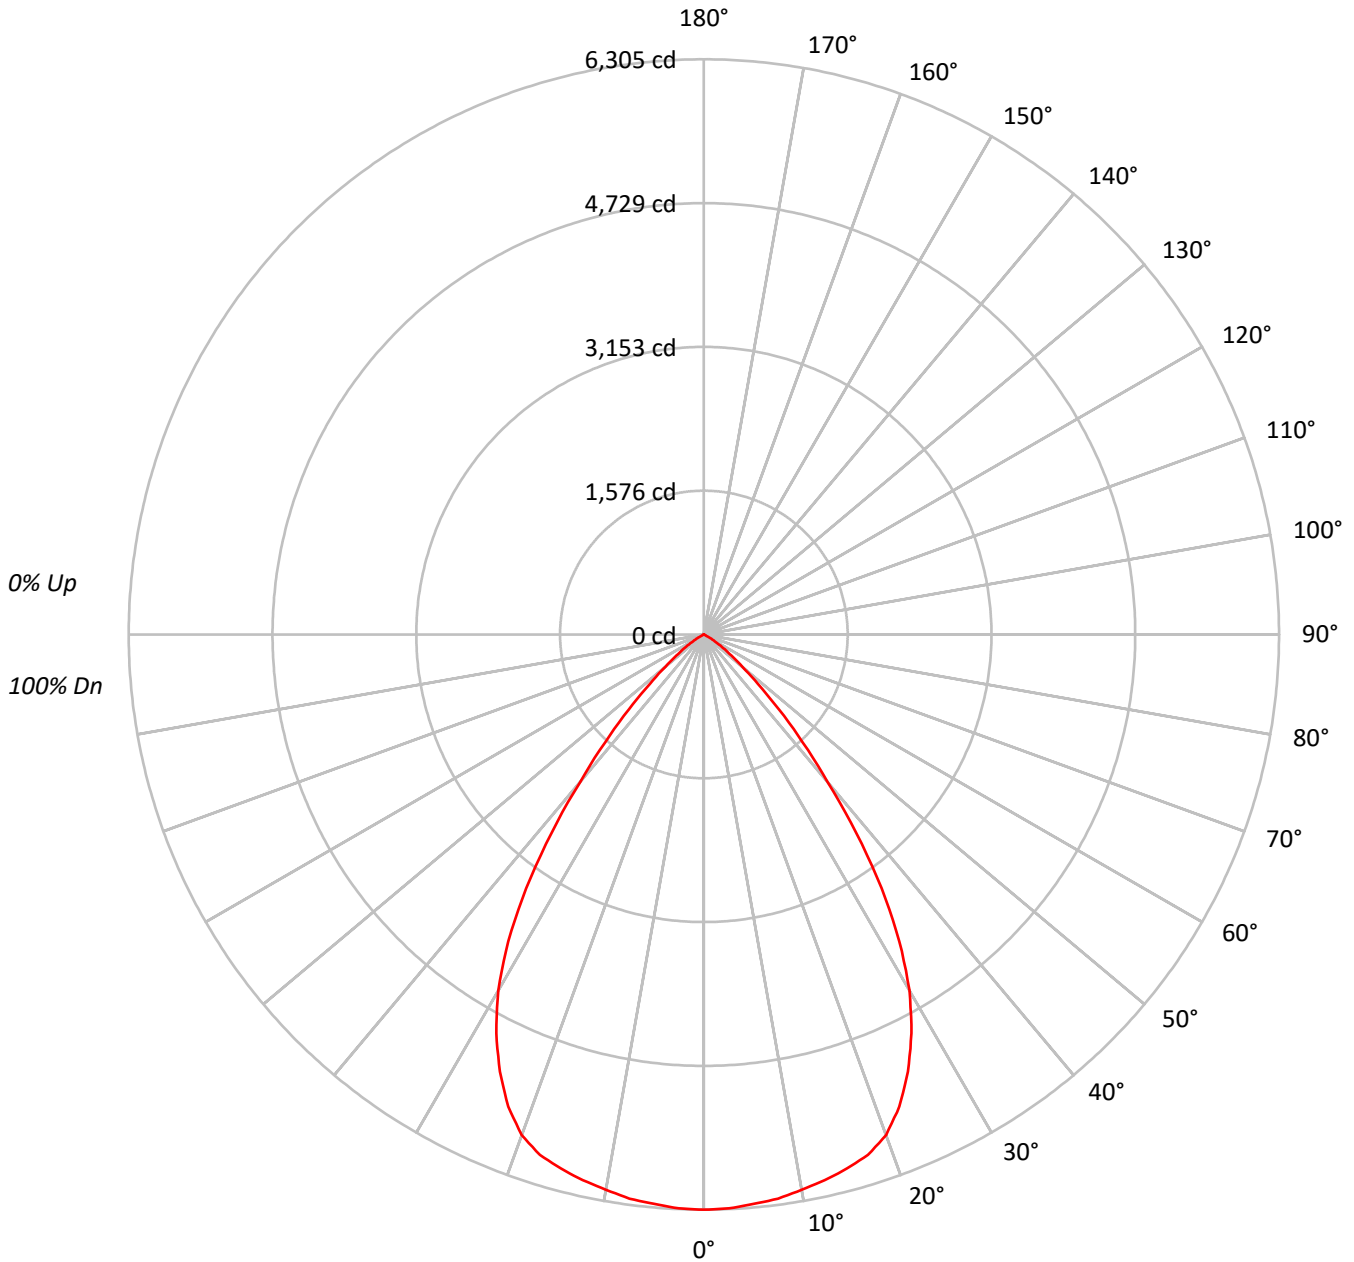



TEST NUMBER: P769368

CATALOG NUMBER: LD6D60D010-EU6DR7055659030-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|--|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |  |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |  |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 113 | 110 | 107 | 105 | 111 | 108 | 106 | 103 | 104 | 102 | 100 | 100 | 99  | 97  | 97  | 95  | 94  | 93  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 107 | 102 | 97  | 94  | 105 | 100 | 96  | 92  | 97  | 93  | 90  | 94  | 91  | 88  | 91  | 89  | 87  | 85  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 101 | 94  | 88  | 84  | 99  | 92  | 87  | 83  | 90  | 85  | 82  | 87  | 84  | 81  | 85  | 82  | 79  | 78  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 95  | 87  | 81  | 76  | 93  | 86  | 80  | 76  | 83  | 78  | 75  | 81  | 77  | 74  | 79  | 76  | 73  | 71  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 89  | 80  | 74  | 69  | 88  | 79  | 73  | 69  | 78  | 72  | 68  | 76  | 71  | 68  | 74  | 70  | 67  | 65  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 84  | 75  | 68  | 63  | 83  | 74  | 68  | 63  | 72  | 67  | 63  | 71  | 66  | 62  | 69  | 65  | 62  | 60  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 80  | 69  | 63  | 58  | 78  | 69  | 62  | 58  | 67  | 62  | 58  | 66  | 61  | 57  | 65  | 61  | 57  | 56  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 75  | 65  | 58  | 54  | 74  | 64  | 58  | 54  | 63  | 57  | 53  | 62  | 57  | 53  | 61  | 56  | 53  | 51  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 71  | 61  | 54  | 50  | 70  | 60  | 54  | 50  | 59  | 53  | 50  | 58  | 53  | 49  | 57  | 53  | 49  | 48  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 67  | 57  | 50  | 46  | 66  | 56  | 50  | 46  | 55  | 50  | 46  | 55  | 50  | 46  | 54  | 49  | 46  | 44  |    |    |   |  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 688867 |
| 5°  | 687155 |
| 10° | 685659 |
| 15° | 685477 |
| 20° | 678766 |
| 25° | 637620 |
| 30° | 568442 |
| 35° | 453221 |
| 40° | 300935 |
| 45° | 179921 |
| 50° | 93268  |
| 55° | 49032  |
| 60° | 17351  |
| 65° | 284    |
| 70° | 0      |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 179921 cd/sqm



TEST NUMBER: P769368

CATALOG NUMBER: LD6D60D010-EU6DR7055659030-6LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 595.8  | 7.5       |
| 10°-20°   | 1708.8 | 21.4      |
| 20°-30°   | 2410.6 | 30.2      |
| 30°-40°   | 2081.0 | 26.1      |
| 40°-50°   | 931.9  | 11.7      |
| 50°-60°   | 244.0  | 3.1       |
| 60°-70°   | 15.9   | 0.2       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 4715.2 | 59.0      |
| 0°-40°    | 6796.3 | 85.1      |
| 0°-60°    | 7972.1 | 99.8      |
| 0°-90°    | 7988.0 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 7988.0 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 6305 |      |
| 5°  | 6265 | 596  |
| 15° | 6060 | 1709 |
| 25° | 5289 | 2411 |
| 35° | 3398 | 2081 |
| 45° | 1164 | 932  |
| 55° | 257  | 244  |
| 65° | 1    | 16   |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P769368

CATALOG NUMBER: LD6D60D010-EU6DR7055659030-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 6304.8 |
| 2.5°  | 6298.0 |
| 5°    | 6265.2 |
| 7.5°  | 6238.0 |
| 10°   | 6180.1 |
| 12.5° | 6128.0 |
| 15°   | 6060.0 |
| 17.5° | 5981.7 |
| 20°   | 5837.7 |
| 22.5° | 5600.8 |
| 25°   | 5289.0 |
| 27.5° | 4927.3 |
| 30°   | 4505.6 |
| 32.5° | 3989.7 |
| 35°   | 3397.9 |
| 37.5° | 2744.8 |
| 40°   | 2109.9 |
| 42.5° | 1603.1 |
| 45°   | 1164.4 |
| 47.5° | 802.7  |
| 50°   | 548.7  |
| 52.5° | 378.7  |
| 55°   | 257.4  |
| 57.5° | 155.3  |
| 60°   | 79.4   |
| 62.5° | 24.9   |
| 65°   | 1.1    |
| 67.5° | 0.0    |
| 70°   | 0.0    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)