

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P768702

Luminaire Tested: LD6D60D010-EU6DR2555659050-6LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P768702
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-4)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D60D010-EU6DR2555659050-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 25° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6035.4 lumens
Efficiency: N/A
Efficacy: 93.7 lumens/watt
Spacing Criteria (0/90/45): 0.42 / 0.42 / 0.45
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 64.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P768702
CATALOG NUMBER: LD6D60D010-EU6DR2555659050-6LBDP1MW

Luminous Intensity Polar Plot

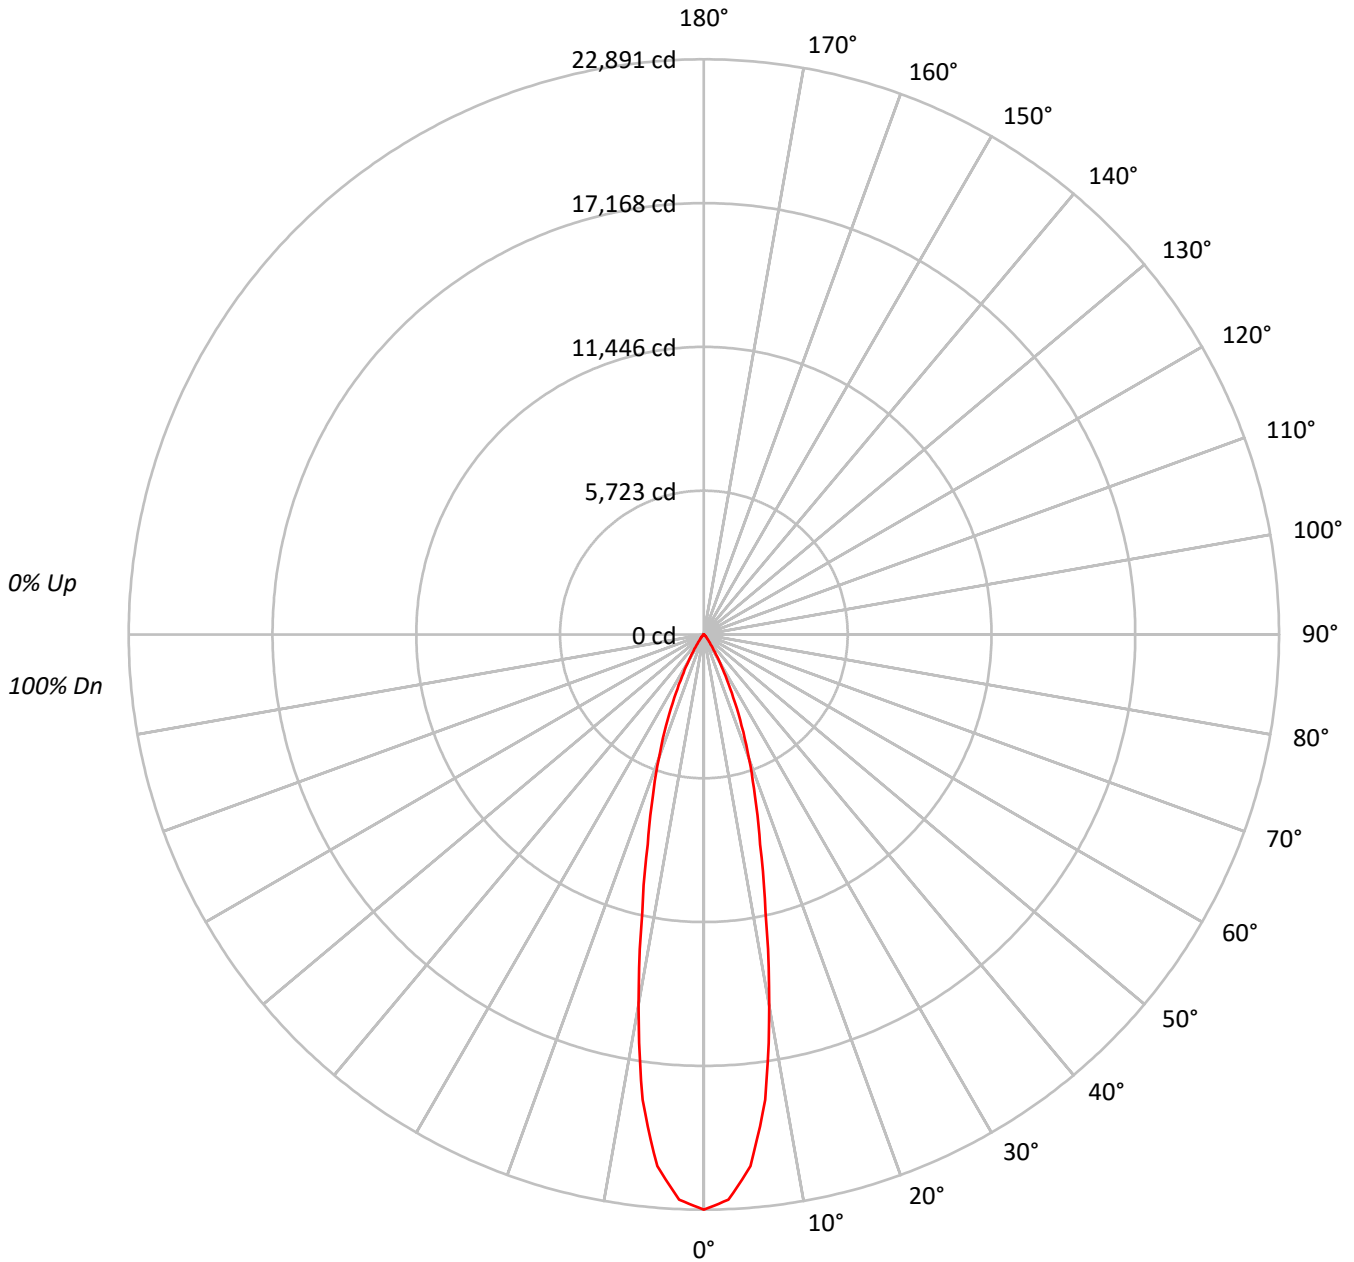



TEST NUMBER: P768702

CATALOG NUMBER: LD6D60D010-EU6DR2555659050-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96	96	96	96	96	96	96	96	96	96	96																
	2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92	92	92	92	92	92	92	92	92	92	92																
	3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89	89	89	89	89	89	89	89	89	89	89																
	4	103	97	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85	85	85	85	85	85	85	85	85	85	85																
	5	100	93	89	86	98	93	89	86	91	87	85	89	86	84	88	85	83	82	82	82	82	82	82	82	82	82	82	82																
	6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79	79	79	79	79	79	79	79	79	79	79																
	7	93	87	82	79	92	86	82	79	85	81	78	84	80	78	83	80	78	77	77	77	77	77	77	77	77	77	77	77																
	8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74	74	74	74	74	74	74	74	74	74	74																
	9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72	72	72	72	72	72	72	72	72	72	72																
	10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69	69	69	69	69	69	69	69	69	69	69																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2501077
5°	2329442
10°	1661653
15°	978649
20°	608933
25°	334181
30°	152834
35°	57875
40°	26215
45°	15761
50°	6544
55°	4210
60°	2950
65°	1991
70°	319
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 15761 cd/sqm



TEST NUMBER: P768702

CATALOG NUMBER: LD6D60D010-EU6DR2555659050-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1825.3	30.2
10°-20°	2472.3	41.0
20°-30°	1308.3	21.7
30°-40°	323.0	5.4
40°-50°	78.8	1.3
50°-60°	20.7	0.3
60°-70°	7.0	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5605.8	92.9
0°-40°	5928.8	98.2
0°-60°	6028.3	99.9
0°-90°	6035.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6035.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	22891	
5°	21239	###
15°	8652	2472
25°	2772	1308
35°	434	323
45°	102	79
55°	22	21
65°	8	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P768702

CATALOG NUMBER: LD6D60D010-EU6DR2555659050-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	22890.9
2.5°	22514.7
5°	21238.9
7.5°	18675.7
10°	14977.1
12.5°	11321.8
15°	8651.8
17.5°	6742.9
20°	5237.1
22.5°	3927.6
25°	2772.0
27.5°	1858.9
30°	1211.4
32.5°	737.0
35°	433.9
37.5°	265.6
40°	183.8
42.5°	140.5
45°	102.0
47.5°	61.6
50°	38.5
52.5°	27.9
55°	22.1
57.5°	17.3
60°	13.5
62.5°	10.6
65°	7.7
67.5°	2.9
70°	1.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)