

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P769973

Luminaire Tested: LD6D65D010-EU6DR6055659027-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P769973  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR6055659027-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6070.0 lumens  
Efficiency: N/A  
Efficacy: 83.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P769973  
CATALOG NUMBER: LD6D65D010-EU6DR6055659027-6LBDP1B

### Luminous Intensity Polar Plot

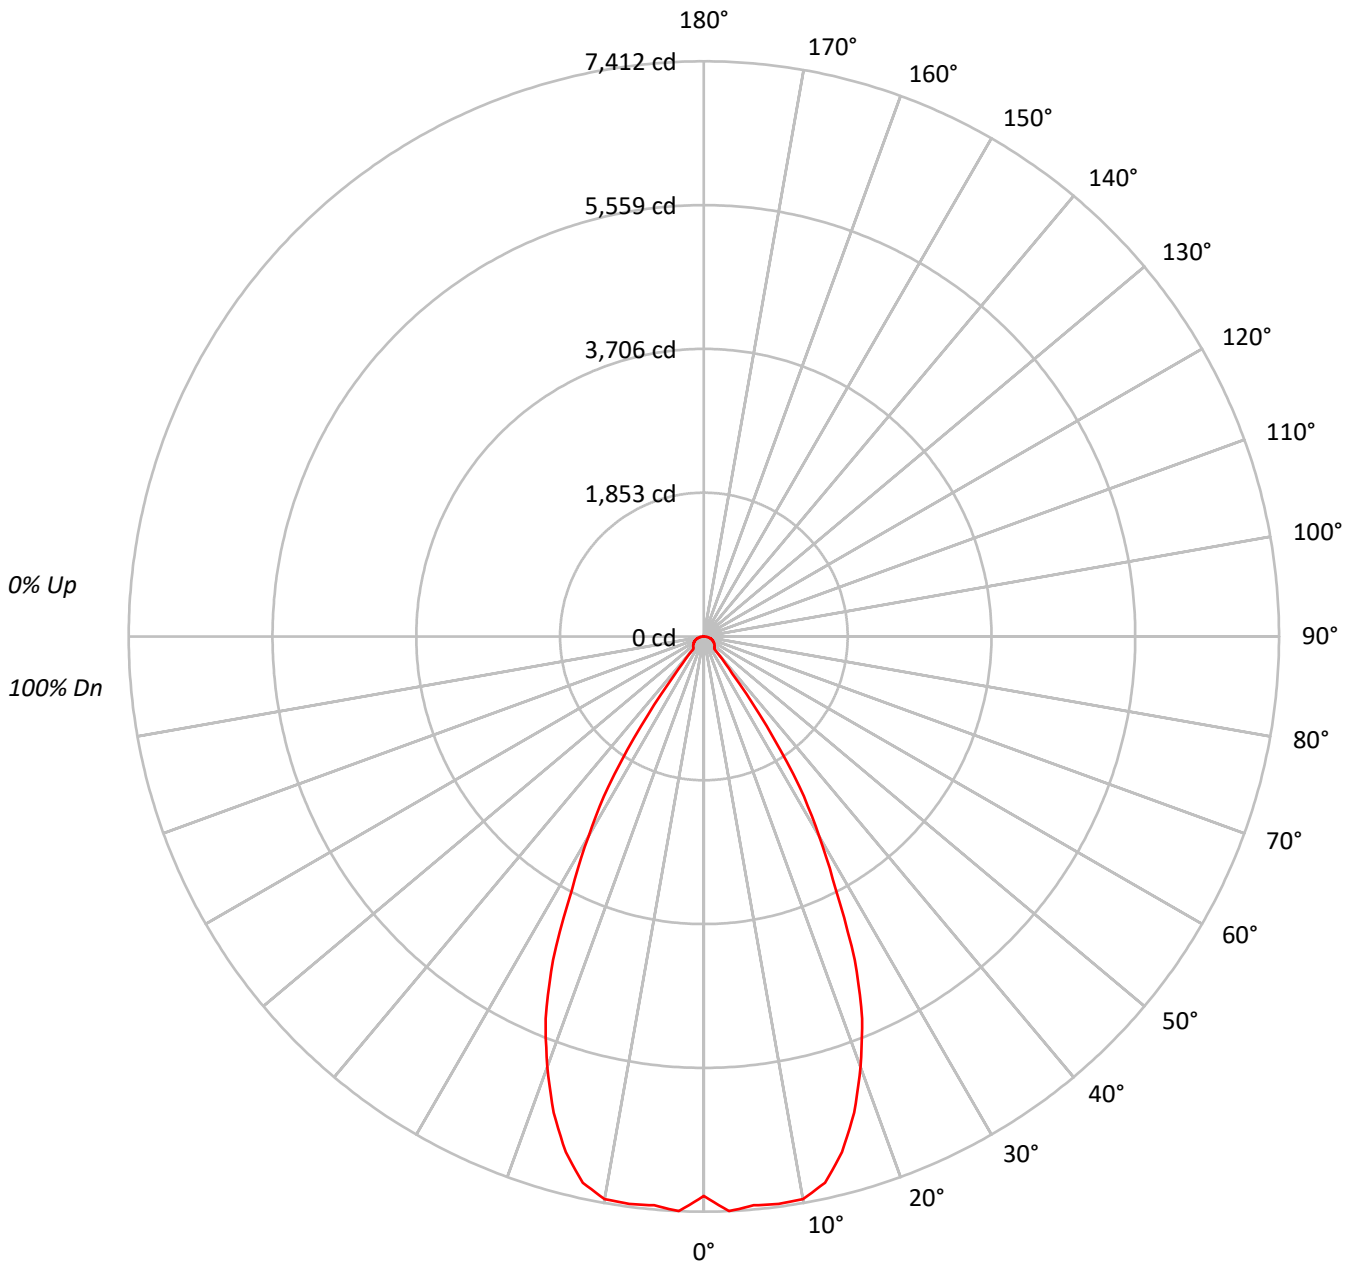



TEST NUMBER: P769973

CATALOG NUMBER: LD6D65D010-EU6DR6055659027-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	787650
5°	807023
10°	816764
15°	778085
20°	686033
25°	554883
30°	375324
35°	188083
40°	30509
45°	29868
50°	30460
55°	30917
60°	31773
65°	32498
70°	33255
75°	33645
80°	32467
85°	27078

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 33645 cd/sqm



TEST NUMBER: P769973

CATALOG NUMBER: LD6D65D010-EU6DR6055659027-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	703.2	11.6
10°-20°	1902.7	31.3
20°-30°	2047.1	33.7
30°-40°	889.8	14.7
40°-50°	149.5	2.5
50°-60°	145.3	2.4
60°-70°	124.3	2.0
70°-80°	83.1	1.4
80°-90°	24.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4653.1	76.7
0°-40°	5542.9	91.3
0°-60°	5837.7	96.2
0°-90°	6070.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6070.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7209	
5°	7358	703
15°	6879	1903
25°	4603	2047
35°	1410	890
45°	193	149
55°	162	145
65°	126	124
75°	80	83
85°	22	25
90°	0	



TEST NUMBER: P769973

CATALOG NUMBER: LD6D65D010-EU6DR6055659027-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	7208.9
2.5°	7411.6
5°	7358.1
7.5°	7375.0
10°	7361.8
12.5°	7209.9
15°	6878.7
17.5°	6434.0
20°	5900.2
22.5°	5328.8
25°	4602.7
27.5°	3681.4
30°	2974.9
32.5°	2292.9
35°	1410.1
37.5°	603.2
40°	213.9
42.5°	197.0
45°	193.3
47.5°	186.7
50°	179.2
52.5°	170.7
55°	162.3
57.5°	153.9
60°	145.4
62.5°	136.0
65°	125.7
67.5°	115.4
70°	104.1
72.5°	91.9
75°	79.7
77.5°	65.7
80°	51.6
82.5°	36.6
85°	21.6
87.5°	7.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)