

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770064

Luminaire Tested: LD6D65D010-EU6DR6555659030-6LBDP1B

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770064  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR6555659030-6LBDP1B  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5168.6 lumens  
Efficiency: N/A  
Efficacy: 71.0 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P770064  
CATALOG NUMBER: LD6D65D010-EU6DR6555659030-6LBDP1B

### Luminous Intensity Polar Plot

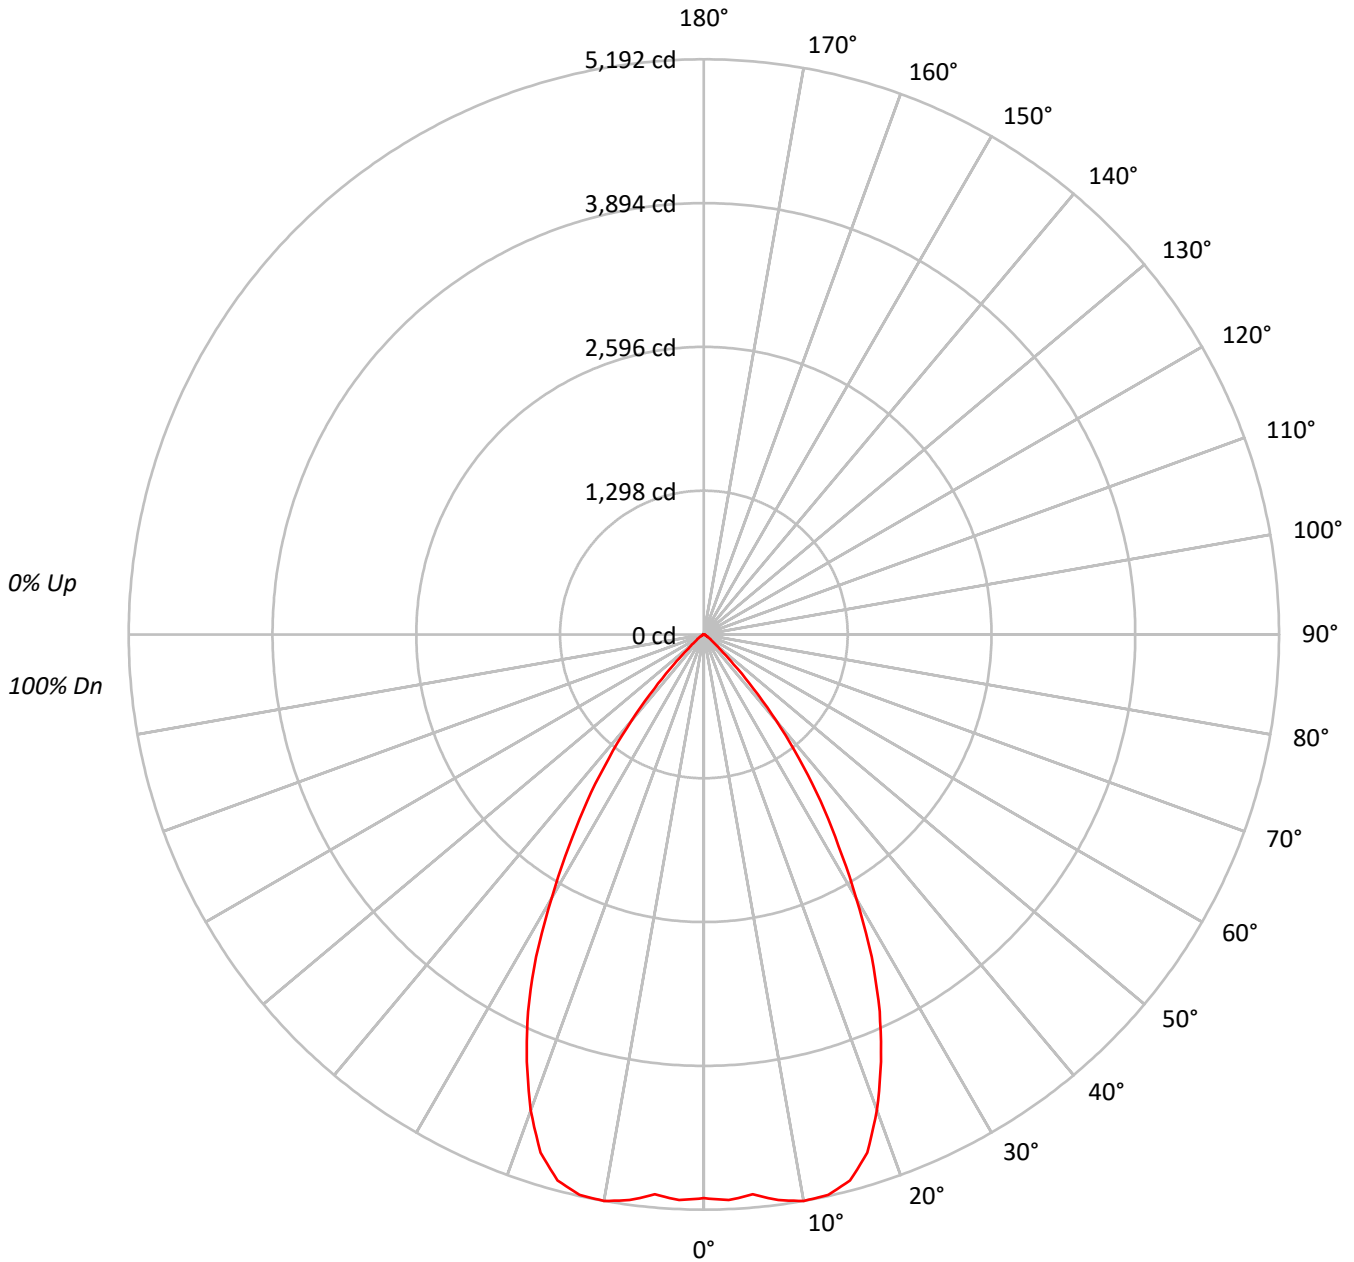



TEST NUMBER: P770064

CATALOG NUMBER: LD6D65D010-EU6DR6555659030-6LBDP1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

0°	
0°	556017
5°	556474
10°	576066
15°	577023
20°	531239
25°	452639
30°	346521
35°	244811
40°	144498
45°	58671
50°	21264
55°	11848
60°	6796
65°	3749
70°	3929
75°	3039
80°	3209
85°	2758

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 58671 cd/sqm



TEST NUMBER: P770064

CATALOG NUMBER: LD6D65D010-EU6DR6555659030-6LBDP1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	490.0	9.5
10°-20°	1413.5	27.3
20°-30°	1695.9	32.8
30°-40°	1139.7	22.1
40°-50°	341.2	6.6
50°-60°	60.2	1.2
60°-70°	17.1	0.3
70°-80°	8.4	0.2
80°-90°	2.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3599.4	69.6
0°-40°	4739.1	91.7
0°-60°	5140.4	99.5
0°-90°	5168.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5168.6	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5089	
5°	5074	490
15°	5101	1413
25°	3755	1696
35°	1835	1140
45°	380	341
55°	62	60
65°	14	17
75°	7	8
85°	2	3
90°	0	



TEST NUMBER: P770064

CATALOG NUMBER: LD6D65D010-EU6DR6555659030-6LBDP1B

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5088.9
2.5°	5110.6
5°	5073.7
7.5°	5150.3
10°	5192.3
12.5°	5182.1
15°	5101.2
17.5°	4903.0
20°	4568.9
22.5°	4175.5
25°	3754.6
27.5°	3279.5
30°	2746.6
32.5°	2263.5
35°	1835.4
37.5°	1412.3
40°	1013.1
42.5°	661.7
45°	379.7
47.5°	201.0
50°	125.1
52.5°	86.8
55°	62.2
57.5°	44.8
60°	31.1
62.5°	20.2
65°	14.5
67.5°	13.0
70°	12.3
72.5°	9.4
75°	7.2
77.5°	6.5
80°	5.1
82.5°	3.6
85°	2.2
87.5°	1.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)