

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770001

Luminaire Tested: LD6D65D010-EU6DR6055659035-6LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770001  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D65D010-EU6DR6055659035-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8426.1 lumens  
Efficiency: N/A  
Efficacy: 115.7 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P770001  
CATALOG NUMBER: LD6D65D010-EU6DR6055659035-6LBDP1LI

### Luminous Intensity Polar Plot

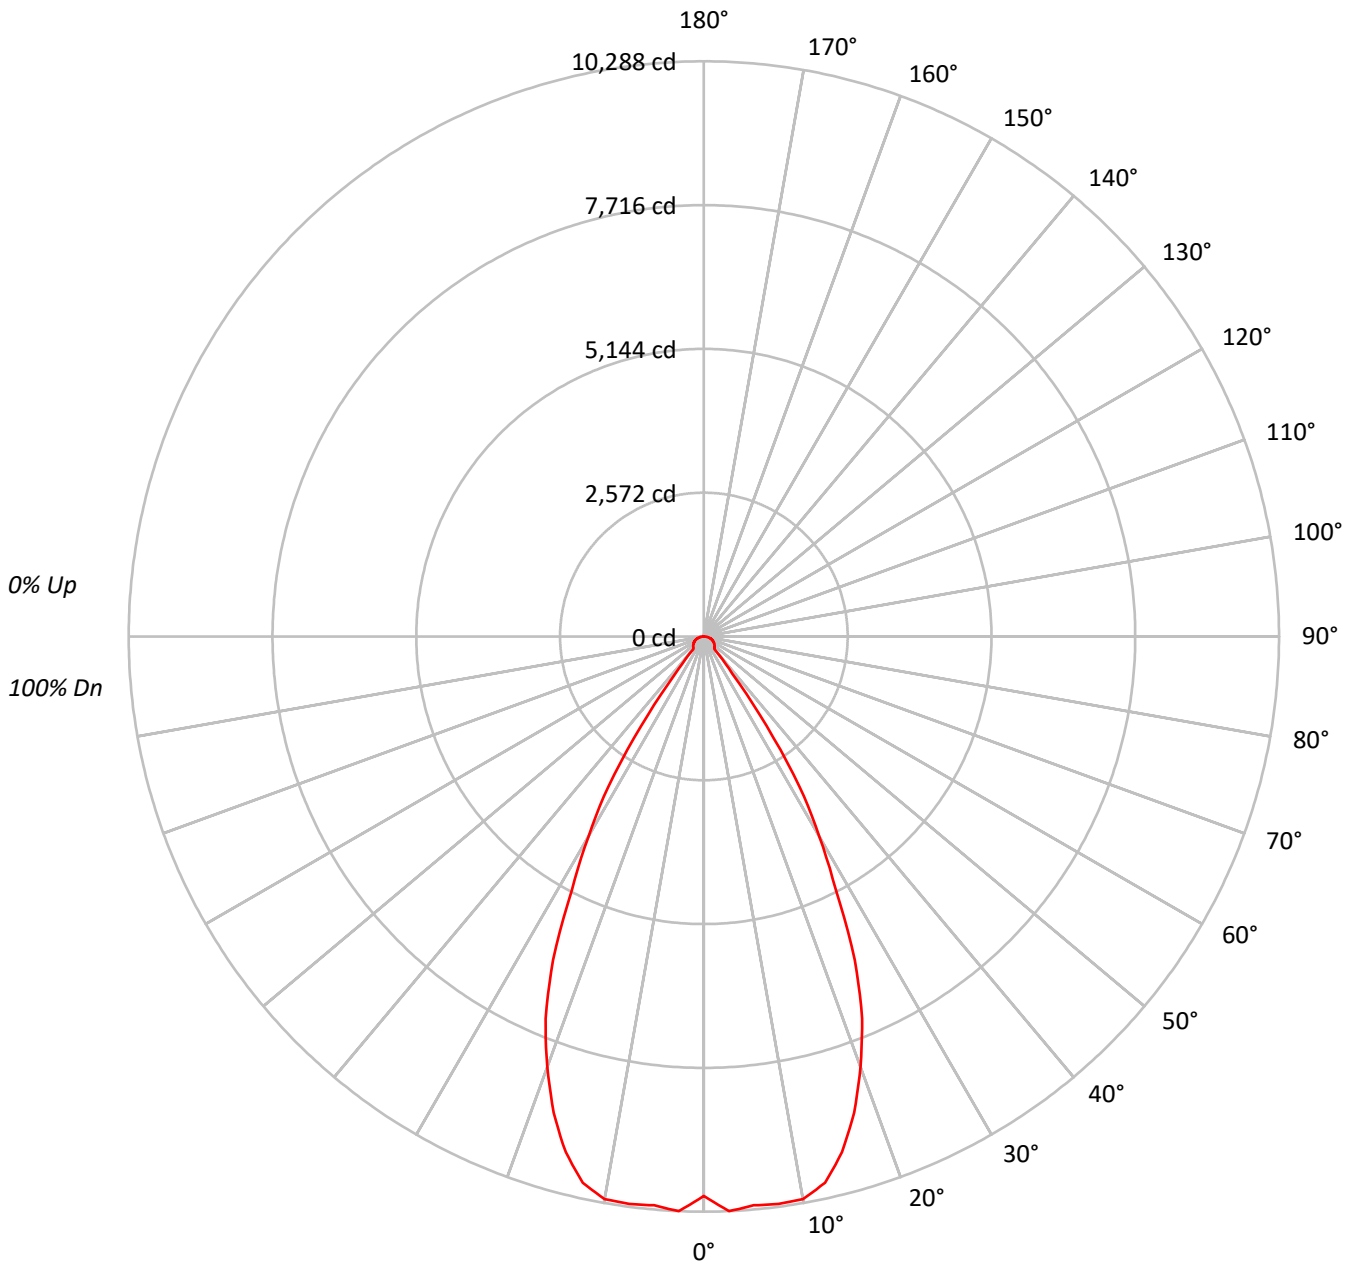



TEST NUMBER: P770001

CATALOG NUMBER: LD6D65D010-EU6DR6055659035-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1093372
5°	1120263
10°	1133793
15°	1080090
20°	952310
25°	770256
30°	521005
35°	261083
40°	42347
45°	41457
50°	42274
55°	42917
60°	44119
65°	45114
70°	46193
75°	46732
80°	45051
85°	37609

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 46732 cd/sqm



TEST NUMBER: P770001

CATALOG NUMBER: LD6D65D010-EU6DR6055659035-6LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	976.2	11.6
10°-20°	2641.2	31.3
20°-30°	2841.7	33.7
30°-40°	1235.2	14.7
40°-50°	207.5	2.5
50°-60°	201.7	2.4
60°-70°	172.5	2.0
70°-80°	115.5	1.4
80°-90°	34.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6459.1	76.7
0°-40°	7694.4	91.3
0°-60°	8103.6	96.2
0°-90°	8426.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8426.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	10007	
5°	10214	976
15°	9549	2641
25°	6389	2842
35°	1957	1235
45°	268	207
55°	225	202
65°	174	173
75°	111	115
85°	30	35
90°	0	



TEST NUMBER: P770001

CATALOG NUMBER: LD6D65D010-EU6DR6055659035-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	10007.0
2.5°	10288.3
5°	10214.1
7.5°	10237.5
10°	10219.3
12.5°	10008.3
15°	9548.6
17.5°	8931.3
20°	8190.3
22.5°	7397.2
25°	6389.2
27.5°	5110.3
30°	4129.6
32.5°	3182.9
35°	1957.4
37.5°	837.4
40°	296.9
42.5°	273.5
45°	268.3
47.5°	259.2
50°	248.7
52.5°	237.0
55°	225.3
57.5°	213.6
60°	201.9
62.5°	188.8
65°	174.5
67.5°	160.2
70°	144.6
72.5°	127.6
75°	110.7
77.5°	91.2
80°	71.6
82.5°	50.8
85°	30.0
87.5°	10.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)