

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770103

Luminaire Tested: LD6D65D010-EU6DR6555659050-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P770103
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D65D010-EU6DR6555659050-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5506.3 lumens
Efficiency: N/A
Efficacy: 75.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P770103
CATALOG NUMBER: LD6D65D010-EU6DR6555659050-6LBDP1B

Luminous Intensity Polar Plot

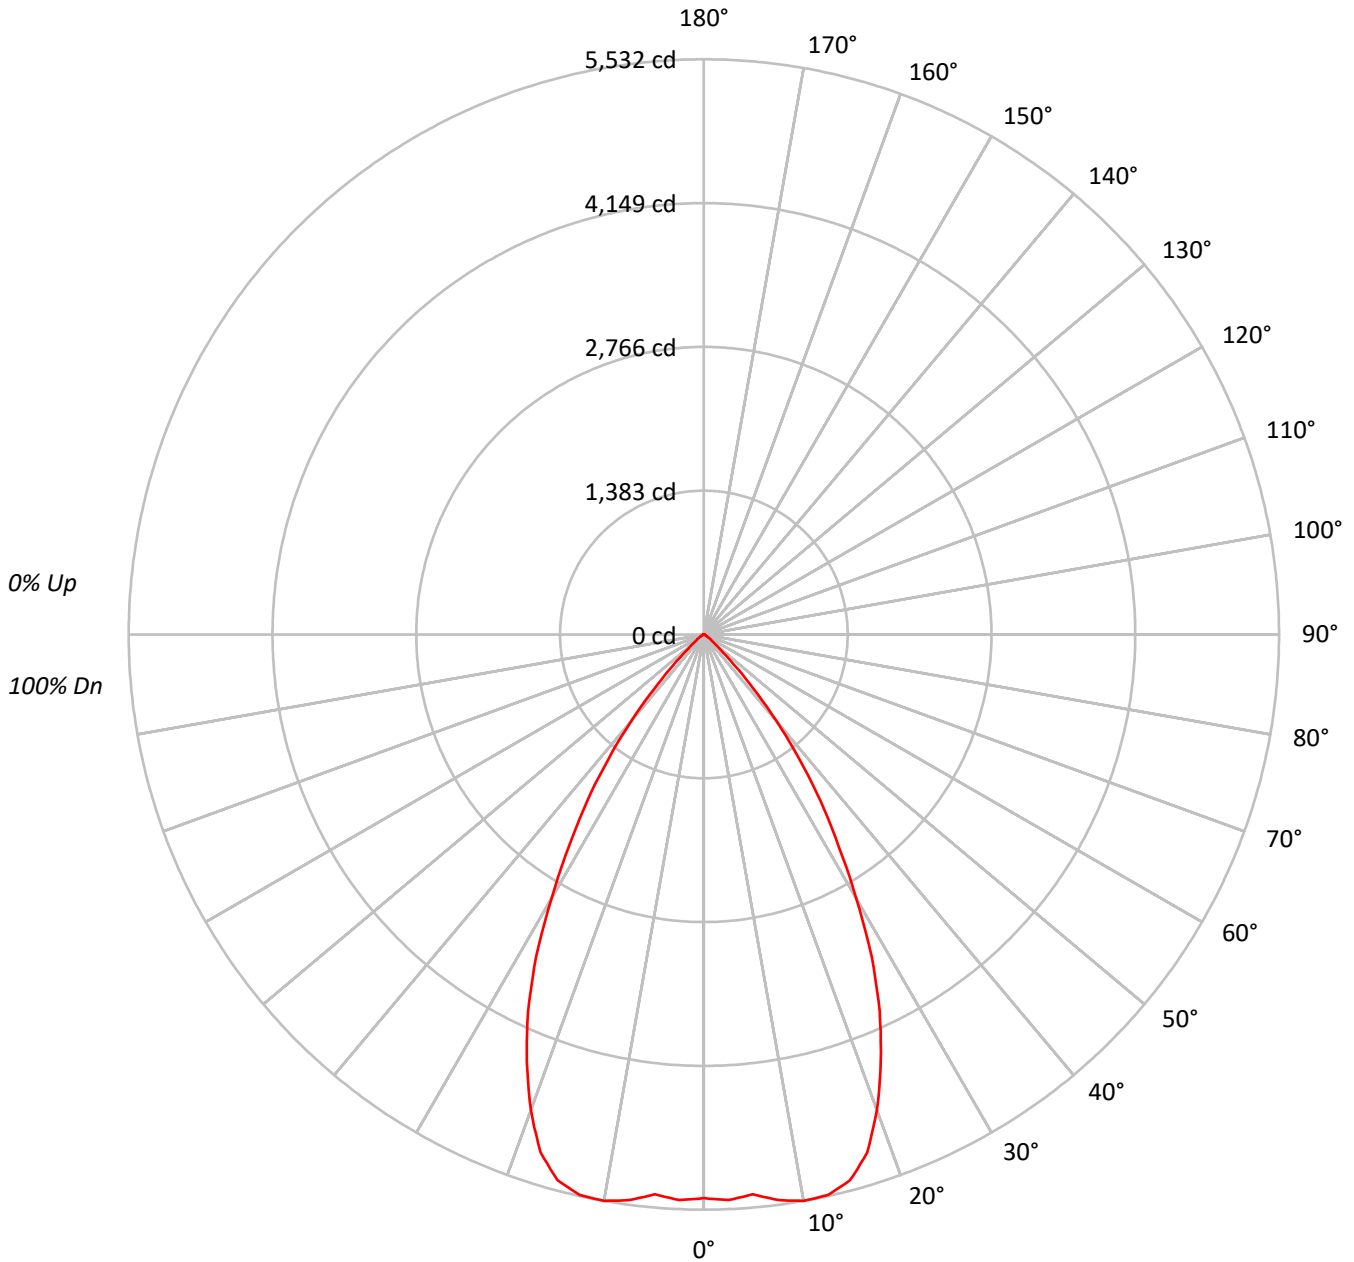



TEST NUMBER: P770103

CATALOG NUMBER: LD6D65D010-EU6DR6555659050-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	592335
5°	592832
10°	613699
15°	614712
20°	565947
25°	482212
30°	369154
35°	260803
40°	153940
45°	62503
50°	22658
55°	12630
60°	7233
65°	3981
70°	4185
75°	3251
80°	3398
85°	2883

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 62503 cd/sqm



TEST NUMBER: P770103

CATALOG NUMBER: LD6D65D010-EU6DR6555659050-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	522.0	9.5
10°-20°	1505.8	27.3
20°-30°	1806.7	32.8
30°-40°	1214.2	22.1
40°-50°	363.5	6.6
50°-60°	64.2	1.2
60°-70°	18.2	0.3
70°-80°	8.9	0.2
80°-90°	2.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3834.5	69.6
0°-40°	5048.7	91.7
0°-60°	5476.3	99.5
0°-90°	5506.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5506.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5421	
5°	5405	522
15°	5434	1506
25°	4000	1807
35°	1955	1214
45°	404	363
55°	66	64
65°	15	18
75°	8	9
85°	2	3
90°	0	



TEST NUMBER: P770103

CATALOG NUMBER: LD6D65D010-EU6DR6555659050-6LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	5421.3
2.5°	5444.4
5°	5405.2
7.5°	5486.8
10°	5531.5
12.5°	5520.7
15°	5434.4
17.5°	5223.3
20°	4867.4
22.5°	4448.3
25°	3999.9
27.5°	3493.8
30°	2926.0
32.5°	2411.4
35°	1955.3
37.5°	1504.6
40°	1079.3
42.5°	704.9
45°	404.5
47.5°	214.2
50°	133.3
52.5°	92.4
55°	66.3
57.5°	47.8
60°	33.1
62.5°	21.6
65°	15.4
67.5°	13.9
70°	13.1
72.5°	10.0
75°	7.7
77.5°	6.9
80°	5.4
82.5°	3.9
85°	2.3
87.5°	1.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)