

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770820

Luminaire Tested: LD6D70BD010-EU6DR6570959024-6LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P770820
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR6570959024-6LBDP1LI
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6363.6 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P770820

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBDP1LI

Luminous Intensity Polar Plot

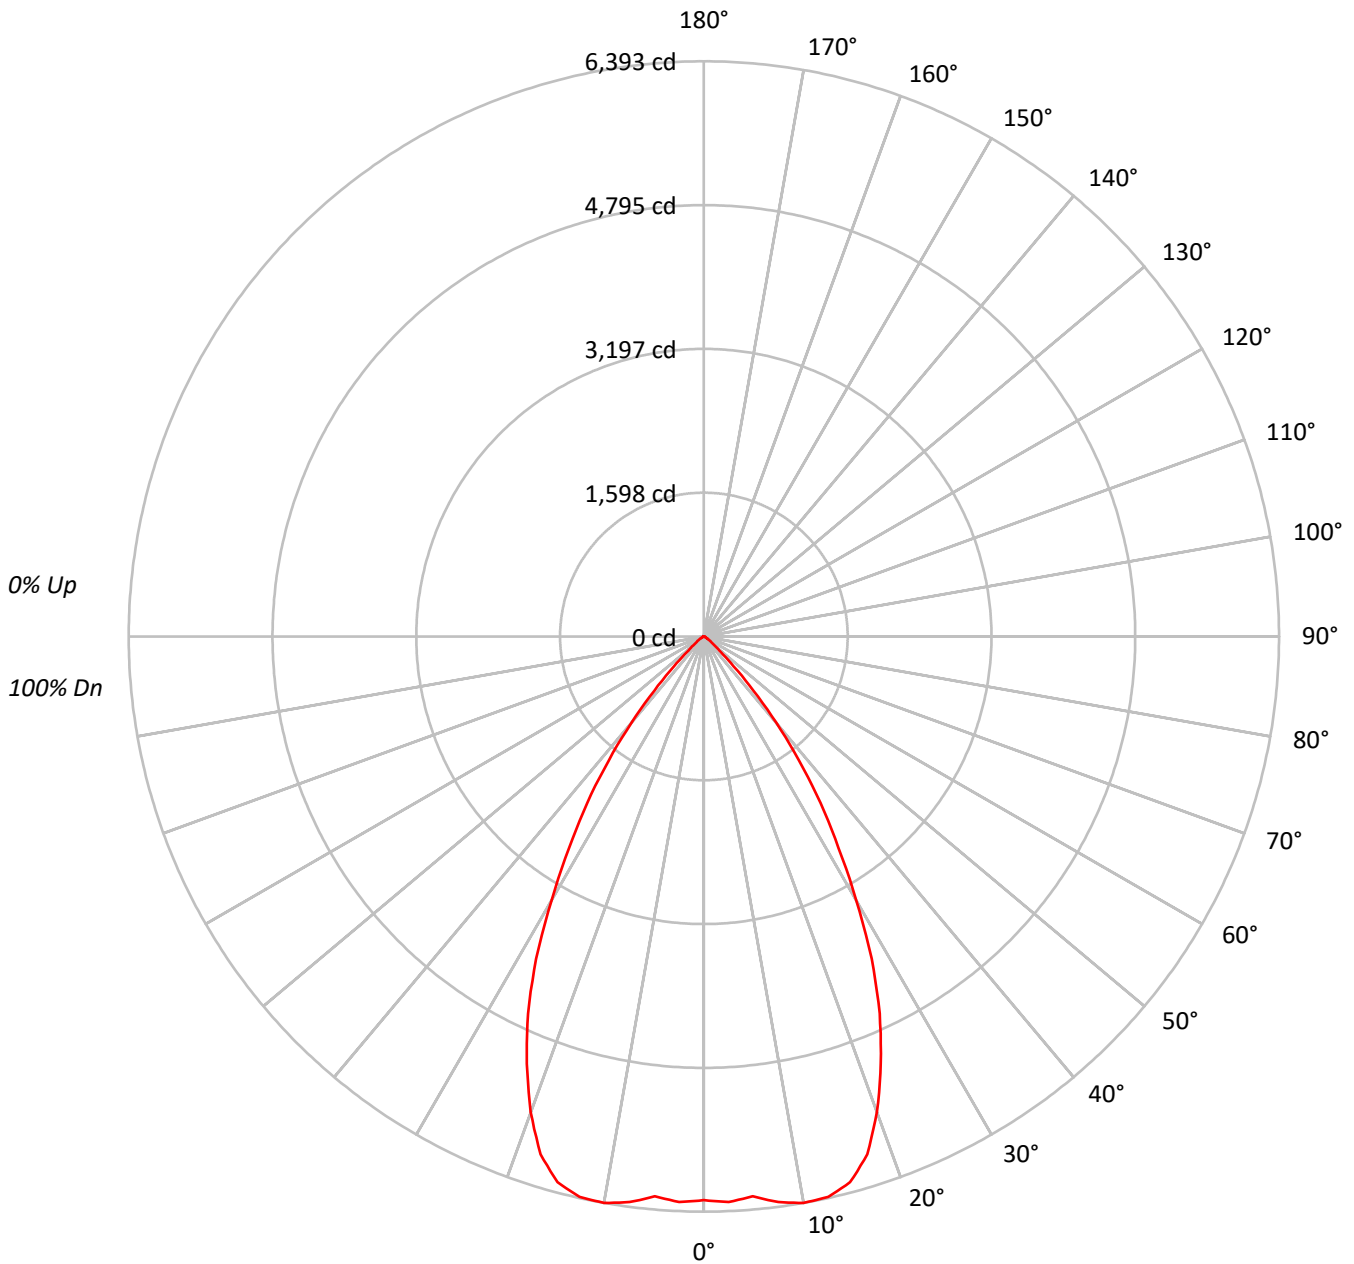



TEST NUMBER: P770820

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	684573
5°	685137
10°	709257
15°	710430
20°	654070
25°	557294
30°	426634
35°	301405
40°	177916
45°	72222
50°	26177
55°	14592
60°	8369
65°	4602
70°	4824
75°	3757
80°	3901
85°	3385

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 72222 cd/sqm



TEST NUMBER: P770820

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	603.3	9.5
10°-20°	1740.3	27.3
20°-30°	2088.0	32.8
30°-40°	1403.2	22.1
40°-50°	420.0	6.6
50°-60°	74.1	1.2
60°-70°	21.1	0.3
70°-80°	10.3	0.2
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4431.6	69.6
0°-40°	5834.8	91.7
0°-60°	6328.9	99.5
0°-90°	6363.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6363.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6266	
5°	6247	603
15°	6281	1740
25°	4623	2088
35°	2260	1403
45°	467	420
55°	77	74
65°	18	21
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P770820

CATALOG NUMBER: LD6D70BD010-EU6DR6570959024-6LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	6265.5
2.5°	6292.2
5°	6246.8
7.5°	6341.1
10°	6392.8
12.5°	6380.3
15°	6280.6
17.5°	6036.6
20°	5625.3
22.5°	5140.9
25°	4622.7
27.5°	4037.8
30°	3381.6
32.5°	2786.8
35°	2259.7
37.5°	1738.9
40°	1247.4
42.5°	814.7
45°	467.4
47.5°	247.5
50°	154.0
52.5°	106.8
55°	76.6
57.5°	55.2
60°	38.3
62.5°	24.9
65°	17.8
67.5°	16.0
70°	15.1
72.5°	11.6
75°	8.9
77.5°	8.0
80°	6.2
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)