

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770897

Luminaire Tested: LD6D70BD010-EU6DR7070959024-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P770897
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR7070959024-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6981.6 lumens
Efficiency: N/A
Efficacy: 104.8 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P770897
CATALOG NUMBER: LD6D70BD010-EU6DR7070959024-6LBDP1H

Luminous Intensity Polar Plot

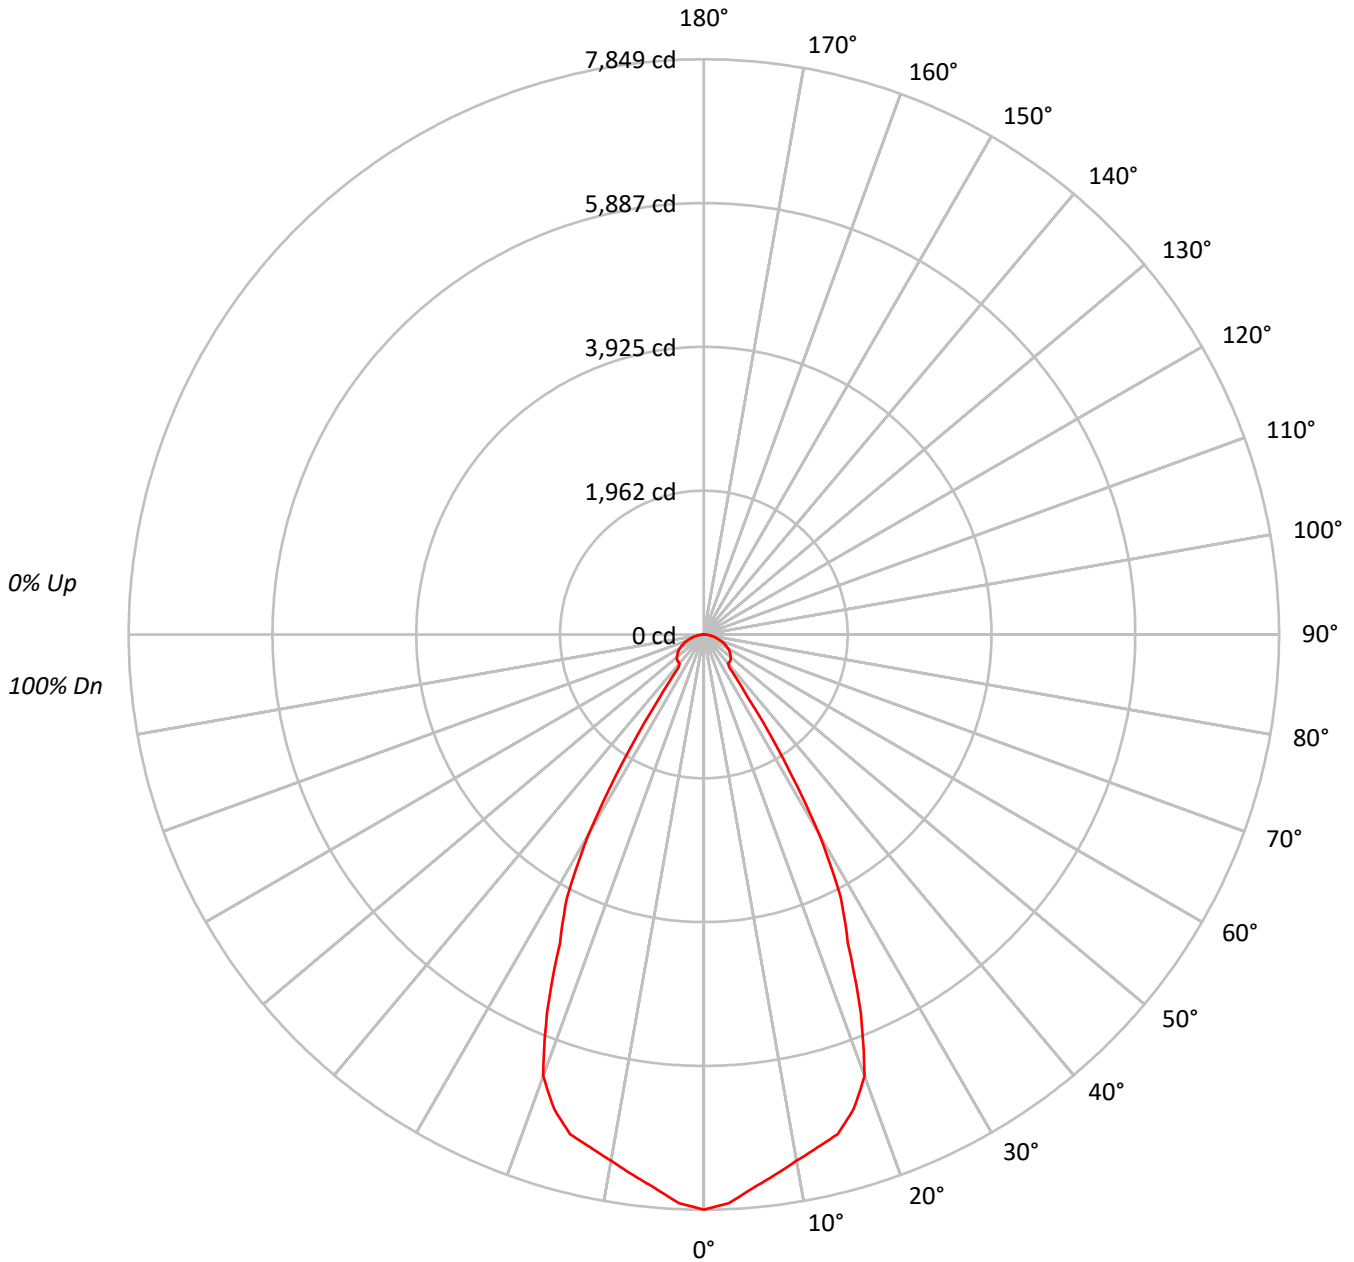



TEST NUMBER: P770897

CATALOG NUMBER: LD6D70BD010-EU6DR7070959024-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	857631
5°	832150
10°	808954
15°	798332
20°	745483
25°	560042
30°	395901
35°	140239
40°	73740
45°	78542
50°	81335
55°	82863
60°	83366
65°	81619
70°	77021
75°	71344
80°	63361
85°	51399

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 83395 cd/sqm



TEST NUMBER: P770897

CATALOG NUMBER: LD6D70BD010-EU6DR7070959024-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	715.6	10.3
10°-20°	1962.9	28.1
20°-30°	2161.9	31.0
30°-40°	826.0	11.8
40°-50°	390.0	5.6
50°-60°	387.7	5.6
60°-70°	310.4	4.4
70°-80°	178.4	2.6
80°-90°	48.5	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4840.5	69.3
0°-40°	5666.5	81.2
0°-60°	6444.3	92.3
0°-90°	6981.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6981.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	7849	
5°	7587	716
15°	7058	1963
25°	4646	2162
35°	1051	826
45°	508	390
55°	435	388
65°	316	310
75°	169	178
85°	41	49
90°	0	



TEST NUMBER: P770897

CATALOG NUMBER: LD6D70BD010-EU6DR7070959024-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	7849.4
2.5°	7767.4
5°	7587.2
7.5°	7436.8
10°	7291.4
12.5°	7168.3
15°	7057.7
17.5°	6790.5
20°	6411.5
22.5°	5593.7
25°	4645.5
27.5°	4044.0
30°	3138.0
32.5°	2027.0
35°	1051.4
37.5°	567.9
40°	517.0
42.5°	513.3
45°	508.3
47.5°	497.1
50°	478.5
52.5°	457.3
55°	435.0
57.5°	410.1
60°	381.5
62.5°	349.2
65°	315.7
67.5°	278.4
70°	241.1
72.5°	203.8
75°	169.0
77.5°	133.0
80°	100.7
82.5°	70.8
85°	41.0
87.5°	16.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)