

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770365

Luminaire Tested: LD6D70BD010-EU6DR3570959027-6LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770365  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D70BD010-EU6DR3570959027-6LBDP1LI  
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 35° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7857.8 lumens  
Efficiency: N/A  
Efficacy: 118.0 lumens/watt  
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P770365

CATALOG NUMBER: LD6D70BD010-EU6DR3570959027-6LBDP1LI

### Luminous Intensity Polar Plot

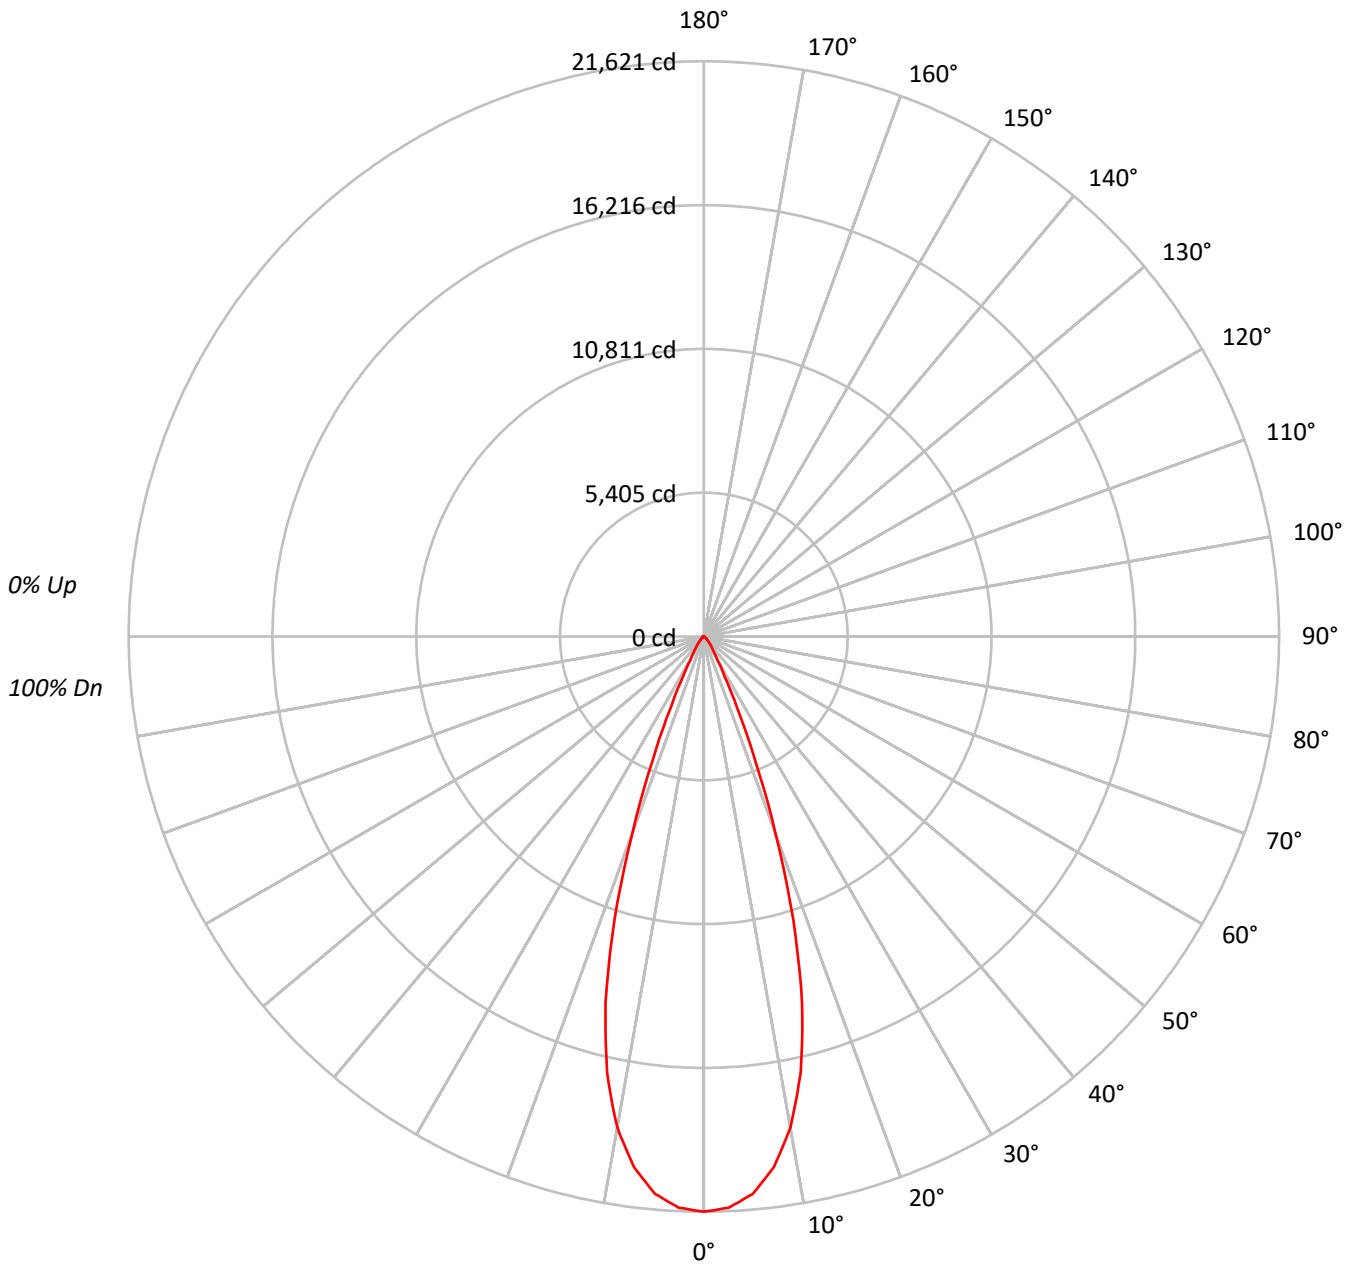



TEST NUMBER: P770365

CATALOG NUMBER: LD6D70BD010-EU6DR3570959027-6LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|-----|--|--|--|--|--|----|--|--|--|--|--|--|--|--|---|
| RF  | 20  |     |     |     |     |     |     |     |     | 20  |     |     |     |     |     |     |     |     | 20 |    |   |     |  |  |  |  |  | 20 |  |  |  |  |  |  |  |  |   |
| RC  | 80  |     |     |     |     |     |     |     |     | 50  |     |     |     |     |     |     |     |     | 30 |    |   |     |  |  |  |  |  | 10 |  |  |  |  |  |  |  |  | 0 |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0 |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |   |     |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |   | 100 |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 1   | 115 | 112 | 110 | 108 | 112 | 110 | 108 | 107 | 106 | 105 | 103 | 103 | 101 | 100 | 99  | 98  | 98  | 96  |    |    |   | 96  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 2   | 110 | 106 | 103 | 101 | 108 | 105 | 102 | 99  | 102 | 99  | 97  | 99  | 97  | 95  | 96  | 95  | 93  | 92  |    |    |   | 92  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 3   | 106 | 101 | 97  | 94  | 105 | 100 | 96  | 93  | 97  | 95  | 92  | 95  | 93  | 91  | 93  | 91  | 89  | 88  |    |    |   | 88  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 4   | 103 | 97  | 92  | 89  | 101 | 96  | 92  | 89  | 94  | 90  | 88  | 92  | 89  | 87  | 90  | 88  | 86  | 84  |    |    |   | 84  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 5   | 99  | 93  | 88  | 85  | 98  | 92  | 87  | 84  | 90  | 86  | 84  | 89  | 85  | 83  | 87  | 84  | 82  | 81  |    |    |   | 81  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 6   | 96  | 89  | 84  | 81  | 94  | 88  | 84  | 81  | 87  | 83  | 80  | 85  | 82  | 80  | 84  | 81  | 79  | 78  |    |    |   | 78  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 7   | 93  | 85  | 81  | 78  | 91  | 85  | 80  | 77  | 84  | 80  | 77  | 83  | 79  | 77  | 82  | 79  | 76  | 75  |    |    |   | 75  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 8   | 90  | 82  | 78  | 74  | 88  | 82  | 77  | 74  | 81  | 77  | 74  | 80  | 76  | 74  | 79  | 76  | 73  | 72  |    |    |   | 72  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 9   | 87  | 79  | 75  | 72  | 86  | 79  | 75  | 72  | 78  | 74  | 71  | 77  | 74  | 71  | 77  | 73  | 71  | 70  |    |    |   | 70  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |
| 10  | 84  | 77  | 72  | 69  | 83  | 76  | 72  | 69  | 76  | 72  | 69  | 75  | 71  | 69  | 74  | 71  | 69  | 68  |    |    |   | 68  |  |  |  |  |  |    |  |  |  |  |  |  |  |  |   |

**AVERAGE LUMINANCE (cd/sqm):**

|     |         |
|-----|---------|
|     | 0°      |
| 0°  | 2362294 |
| 5°  | 2306783 |
| 10° | 2079022 |
| 15° | 1613654 |
| 20° | 915242  |
| 25° | 356074  |
| 30° | 132837  |
| 35° | 72814   |
| 40° | 47596   |
| 45° | 28972   |
| 50° | 18443   |
| 55° | 13030   |
| 60° | 9528    |
| 65° | 5171    |
| 70° | 383     |
| 75° | 0       |
| 80° | 0       |
| 85° | 0       |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 28972 cd/sqm



TEST NUMBER: P770365

CATALOG NUMBER: LD6D70BD010-EU6DR3570959027-6LBDP1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 1934.3 | 24.6      |
| 10°-20°   | 3776.7 | 48.1      |
| 20°-30°   | 1540.3 | 19.6      |
| 30°-40°   | 368.6  | 4.7       |
| 40°-50°   | 153.6  | 2.0       |
| 50°-60°   | 63.6   | 0.8       |
| 60°-70°   | 19.9   | 0.3       |
| 70°-80°   | 0.5    | 0.0       |
| 80°-90°   | 0.3    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 7251.3 | 92.3      |
| 0°-40°    | 7619.9 | 97.0      |
| 0°-60°    | 7837.1 | 99.7      |
| 0°-90°    | 7857.8 | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 7857.8 | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°    | Flux |
|-----|-------|------|
| 0°  | 21621 |      |
| 5°  | 21032 | ###  |
| 15° | 14266 | 3777 |
| 25° | 2954  | 1540 |
| 35° | 546   | 369  |
| 45° | 188   | 154  |
| 55° | 68    | 64   |
| 65° | 20    | 20   |
| 75° | 0     | 0    |
| 85° | 0     | 0    |
| 90° | 0     |      |



TEST NUMBER: P770365  
CATALOG NUMBER: LD6D70BD010-EU6DR3570959027-6LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

| 0°    |         |
|-------|---------|
| 0°    | 21620.7 |
| 2.5°  | 21491.0 |
| 5°    | 21032.3 |
| 7.5°  | 20117.3 |
| 10°   | 18739.0 |
| 12.5° | 16798.2 |
| 15°   | 14265.6 |
| 17.5° | 11168.2 |
| 20°   | 7871.5  |
| 22.5° | 5019.3  |
| 25°   | 2953.6  |
| 27.5° | 1669.6  |
| 30°   | 1052.9  |
| 32.5° | 739.3   |
| 35°   | 545.9   |
| 37.5° | 422.1   |
| 40°   | 333.7   |
| 42.5° | 257.0   |
| 45°   | 187.5   |
| 47.5° | 140.3   |
| 50°   | 108.5   |
| 52.5° | 86.1    |
| 55°   | 68.4    |
| 57.5° | 55.4    |
| 60°   | 43.6    |
| 62.5° | 31.8    |
| 65°   | 20.0    |
| 67.5° | 7.1     |
| 70°   | 1.2     |
| 72.5° | 1.2     |
| 75°   | 0.0     |
| 77.5° | 0.0     |
| 80°   | 0.0     |
| 82.5° | 1.2     |
| 85°   | 0.0     |
| 87.5° | 0.0     |
| 90°   | 0.0     |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)