

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770847

Luminaire Tested: LD6D70BD010-EU6DR6570959030-6LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P770847
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR6570959030-6LBDP1MW
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6102.4 lumens
Efficiency: N/A
Efficacy: 91.6 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P770847
CATALOG NUMBER: LD6D70BD010-EU6DR6570959030-6LBDP1MW

Luminous Intensity Polar Plot

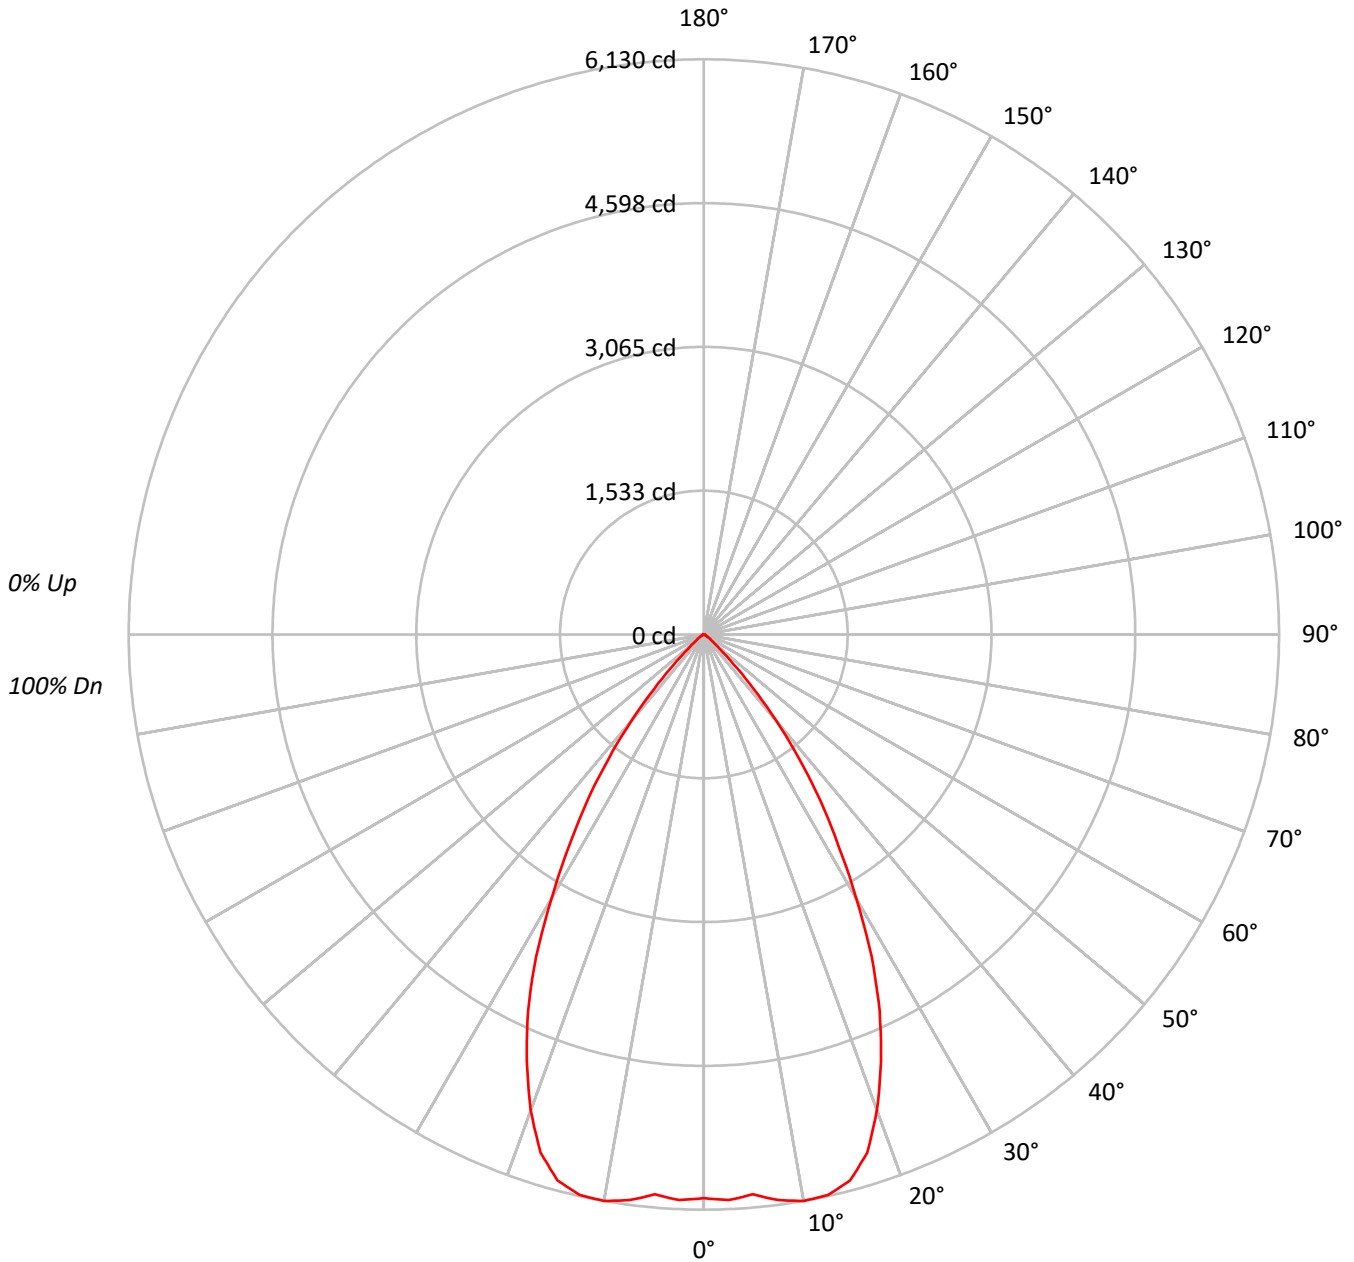



TEST NUMBER: P770847

CATALOG NUMBER: LD6D70BD010-EU6DR6570959030-6LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	656460
5°	657005
10°	680134
15°	681258
20°	627211
25°	534412
30°	409110
35°	289040
40°	170614
45°	69255
50°	25106
55°	13982
60°	8020
65°	4421
70°	4632
75°	3588
80°	3775
85°	3259

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 69255 cd/sqm



TEST NUMBER: P770847

CATALOG NUMBER: LD6D70BD010-EU6DR6570959030-6LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	578.5	9.5
10°-20°	1668.8	27.3
20°-30°	2002.3	32.8
30°-40°	1345.6	22.1
40°-50°	402.8	6.6
50°-60°	71.1	1.2
60°-70°	20.2	0.3
70°-80°	9.9	0.2
80°-90°	3.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4249.6	69.6
0°-40°	5595.2	91.7
0°-60°	6069.1	99.5
0°-90°	6102.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6102.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6008	
5°	5990	579
15°	6023	1669
25°	4433	2002
35°	2167	1346
45°	448	403
55°	73	71
65°	17	20
75°	8	10
85°	3	3
90°	0	



TEST NUMBER: P770847

CATALOG NUMBER: LD6D70BD010-EU6DR6570959030-6LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6008.2
2.5°	6033.8
5°	5990.3
7.5°	6080.8
10°	6130.3
12.5°	6118.4
15°	6022.7
17.5°	5788.8
20°	5394.3
22.5°	4929.9
25°	4432.9
27.5°	3872.0
30°	3242.7
32.5°	2672.4
35°	2167.0
37.5°	1667.5
40°	1196.2
42.5°	781.2
45°	448.2
47.5°	237.4
50°	147.7
52.5°	102.5
55°	73.4
57.5°	52.9
60°	36.7
62.5°	23.9
65°	17.1
67.5°	15.4
70°	14.5
72.5°	11.1
75°	8.5
77.5°	7.7
80°	6.0
82.5°	4.3
85°	2.6
87.5°	1.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)