

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770952

Luminaire Tested: LD6D70BD010-EU6DR7070959040-6LBS1B

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P770952  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D70BD010-EU6DR7070959040-6LBS1B  
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8444.4 lumens  
Efficiency: N/A  
Efficacy: 126.8 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 66.6  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P770952

CATALOG NUMBER: LD6D70BD010-EU6DR7070959040-6LBS1B

### Luminous Intensity Polar Plot

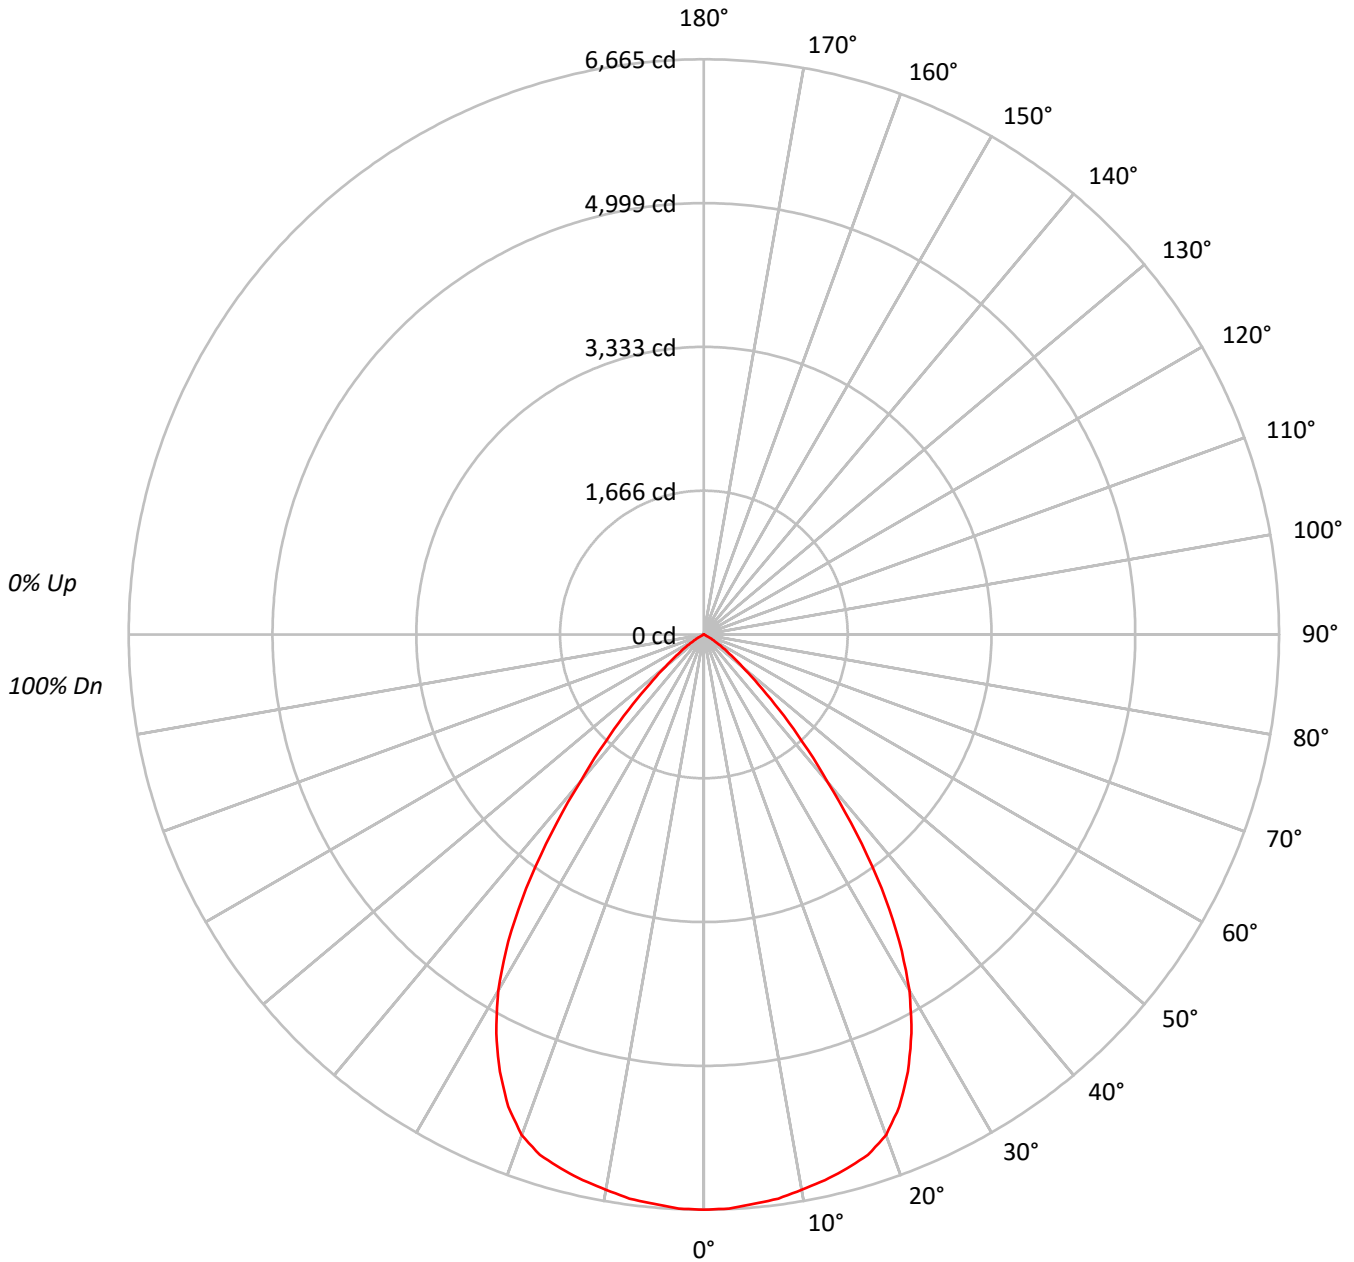



TEST NUMBER: P770952

CATALOG NUMBER: LD6D70BD010-EU6DR7070959040-6LBS1B

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78																			
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71																			
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65																			
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60																			
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56																			
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51																			
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48																			
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	728234
5°	726409
10°	724834
15°	724638
20°	717555
25°	674052
30°	600917
35°	479111
40°	318136
45°	190196
50°	98605
55°	51832
60°	18334
65°	310
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 190196 cd/sqm



TEST NUMBER: P770952

CATALOG NUMBER: LD6D70BD010-EU6DR7070959040-6LBS1B

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	629.8	7.5
10°-20°	1806.4	21.4
20°-30°	2548.4	30.2
30°-40°	2199.9	26.1
40°-50°	985.2	11.7
50°-60°	257.9	3.1
60°-70°	16.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4984.7	59.0
0°-40°	7184.6	85.1
0°-60°	8427.6	99.8
0°-90°	8444.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8444.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6665	
5°	6623	630
15°	6406	1806
25°	5591	2548
35°	3592	2200
45°	1231	985
55°	272	258
65°	1	17
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P770952

CATALOG NUMBER: LD6D70BD010-EU6DR7070959040-6LBS1B

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	6665.1
2.5°	6657.9
5°	6623.1
7.5°	6594.3
10°	6533.2
12.5°	6478.1
15°	6406.2
17.5°	6323.5
20°	6171.3
22.5°	5920.8
25°	5591.2
27.5°	5208.8
30°	4763.0
32.5°	4217.6
35°	3592.0
37.5°	2901.7
40°	2230.5
42.5°	1694.7
45°	1230.9
47.5°	848.6
50°	580.1
52.5°	400.3
55°	272.1
57.5°	164.2
60°	83.9
62.5°	26.4
65°	1.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)