

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P770890

Luminaire Tested: LD6D70BD010-EU6DR6570959050-6LBS1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P770890
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D70BD010-EU6DR6570959050-6LBS1MW
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7536.6 lumens
Efficiency: N/A
Efficacy: 113.2 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96
Luminous Opening: Circular (Dia: 0.48' x H: 0')
CIE Type: Direct


Input Watts (W): 66.6
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P770890
CATALOG NUMBER: LD6D70BD010-EU6DR6570959050-6LBS1MW

Luminous Intensity Polar Plot

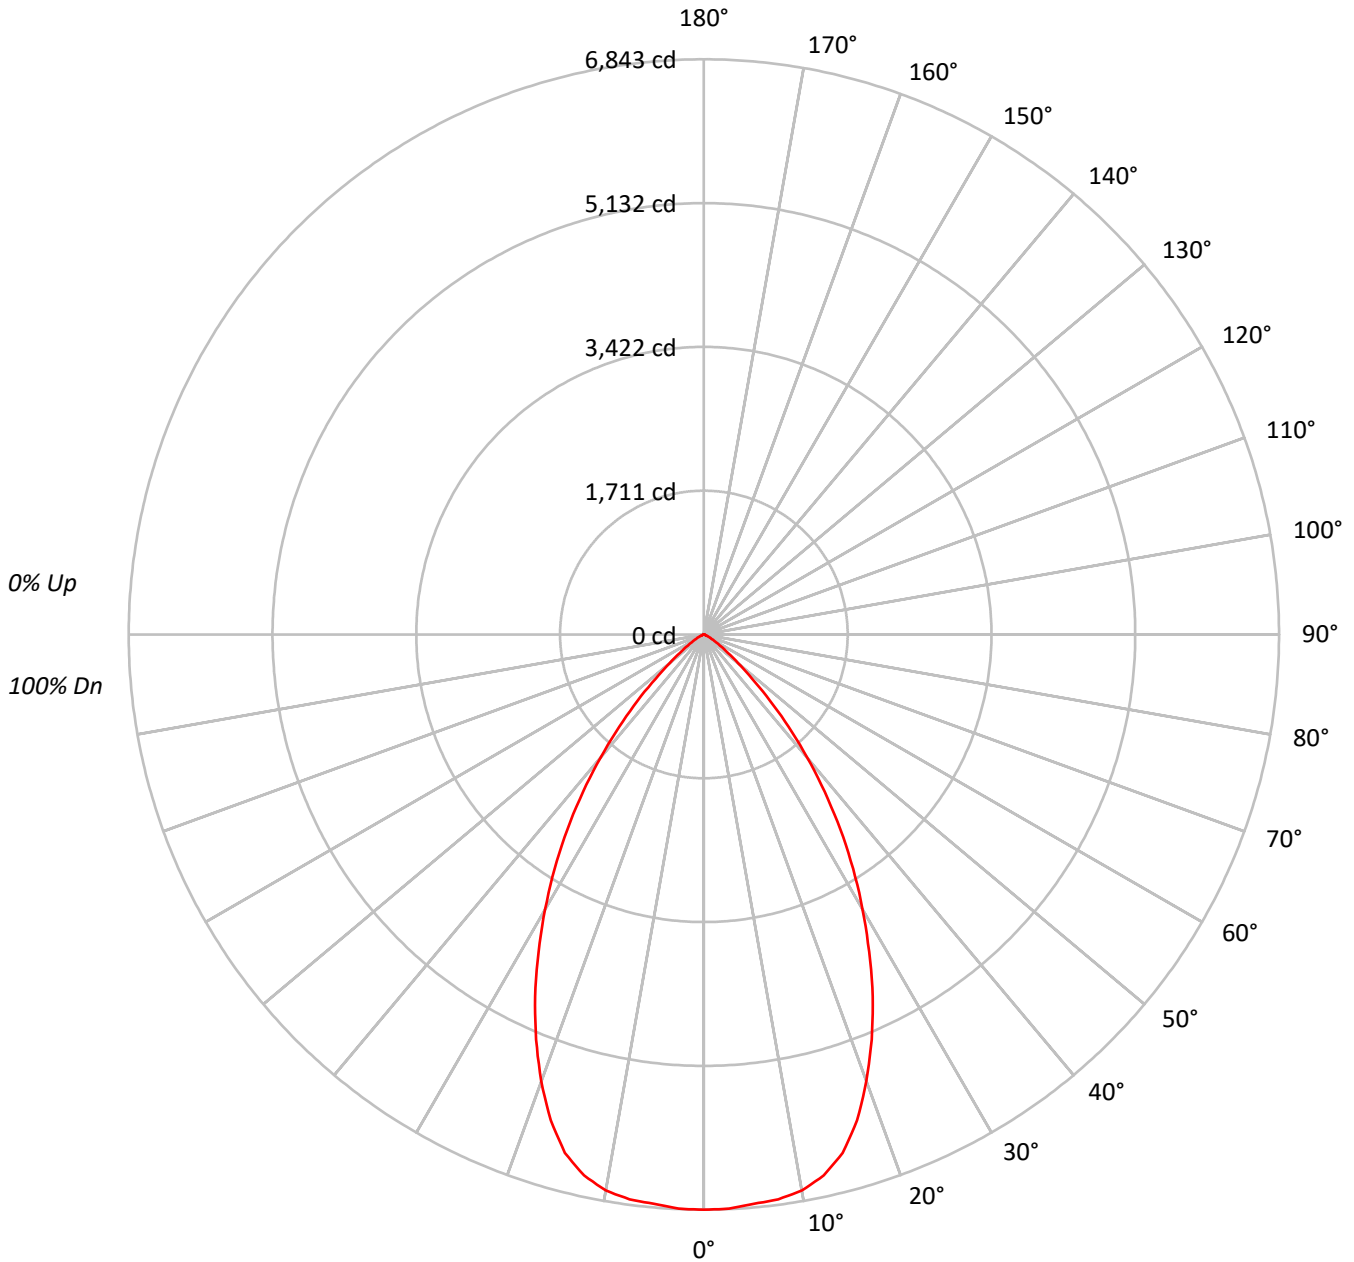



TEST NUMBER: P770890

CATALOG NUMBER: LD6D70BD010-EU6DR6570959050-6LBS1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	399664
5°	398657
10°	398315
15°	386039
20°	351439
25°	306258
30°	254717
35°	201830
40°	145666
45°	92028
50°	47965
55°	25497
60°	13386
65°	7366
70°	3091
75°	3407
80°	2354
85°	2010

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 92028 cd/sqm



TEST NUMBER: P770890

CATALOG NUMBER: LD6D70BD010-EU6DR6570959050-6LBS1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	647.1	8.6
10°-20°	1772.1	23.5
20°-30°	2166.1	28.7
30°-40°	1757.5	23.3
40°-50°	875.8	11.6
50°-60°	244.3	3.2
60°-70°	55.5	0.7
70°-80°	14.5	0.2
80°-90°	3.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4585.4	60.8
0°-40°	6342.9	84.2
0°-60°	7463.0	99.0
0°-90°	7536.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7536.6	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6843	
5°	6800	647
15°	6385	1772
25°	4752	2166
35°	2831	1758
45°	1114	876
55°	250	244
65°	53	56
75°	15	14
85°	3	4
90°	0	



TEST NUMBER: P770890

CATALOG NUMBER: LD6D70BD010-EU6DR6570959050-6LBS1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	6843.1
2.5°	6838.1
5°	6799.9
7.5°	6777.7
10°	6716.4
12.5°	6591.7
15°	6384.6
17.5°	6060.8
20°	5654.5
22.5°	5216.0
25°	4752.5
27.5°	4256.7
30°	3777.0
32.5°	3303.4
35°	2830.8
37.5°	2359.1
40°	1910.6
42.5°	1490.3
45°	1114.2
47.5°	776.3
50°	527.9
52.5°	364.0
55°	250.4
57.5°	168.9
60°	114.6
62.5°	79.4
65°	53.3
67.5°	27.2
70°	18.1
72.5°	17.1
75°	15.1
77.5°	10.1
80°	7.0
82.5°	5.0
85°	3.0
87.5°	2.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)