

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771449

Luminaire Tested: LD6D75BD010-EU6DR5570959024-6LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P771449  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-52)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D75BD010-EU6DR5570959024-6LBS1MW  
Description: 6 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 55° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7476.4 lumens  
Efficiency: N/A  
Efficacy: 103.3 lumens/watt  
Spacing Criteria (0/90/45): 0.89 / 0.89 / 0.87  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P771449

CATALOG NUMBER: LD6D75BD010-EU6DR5570959024-6LBS1MW

### Luminous Intensity Polar Plot

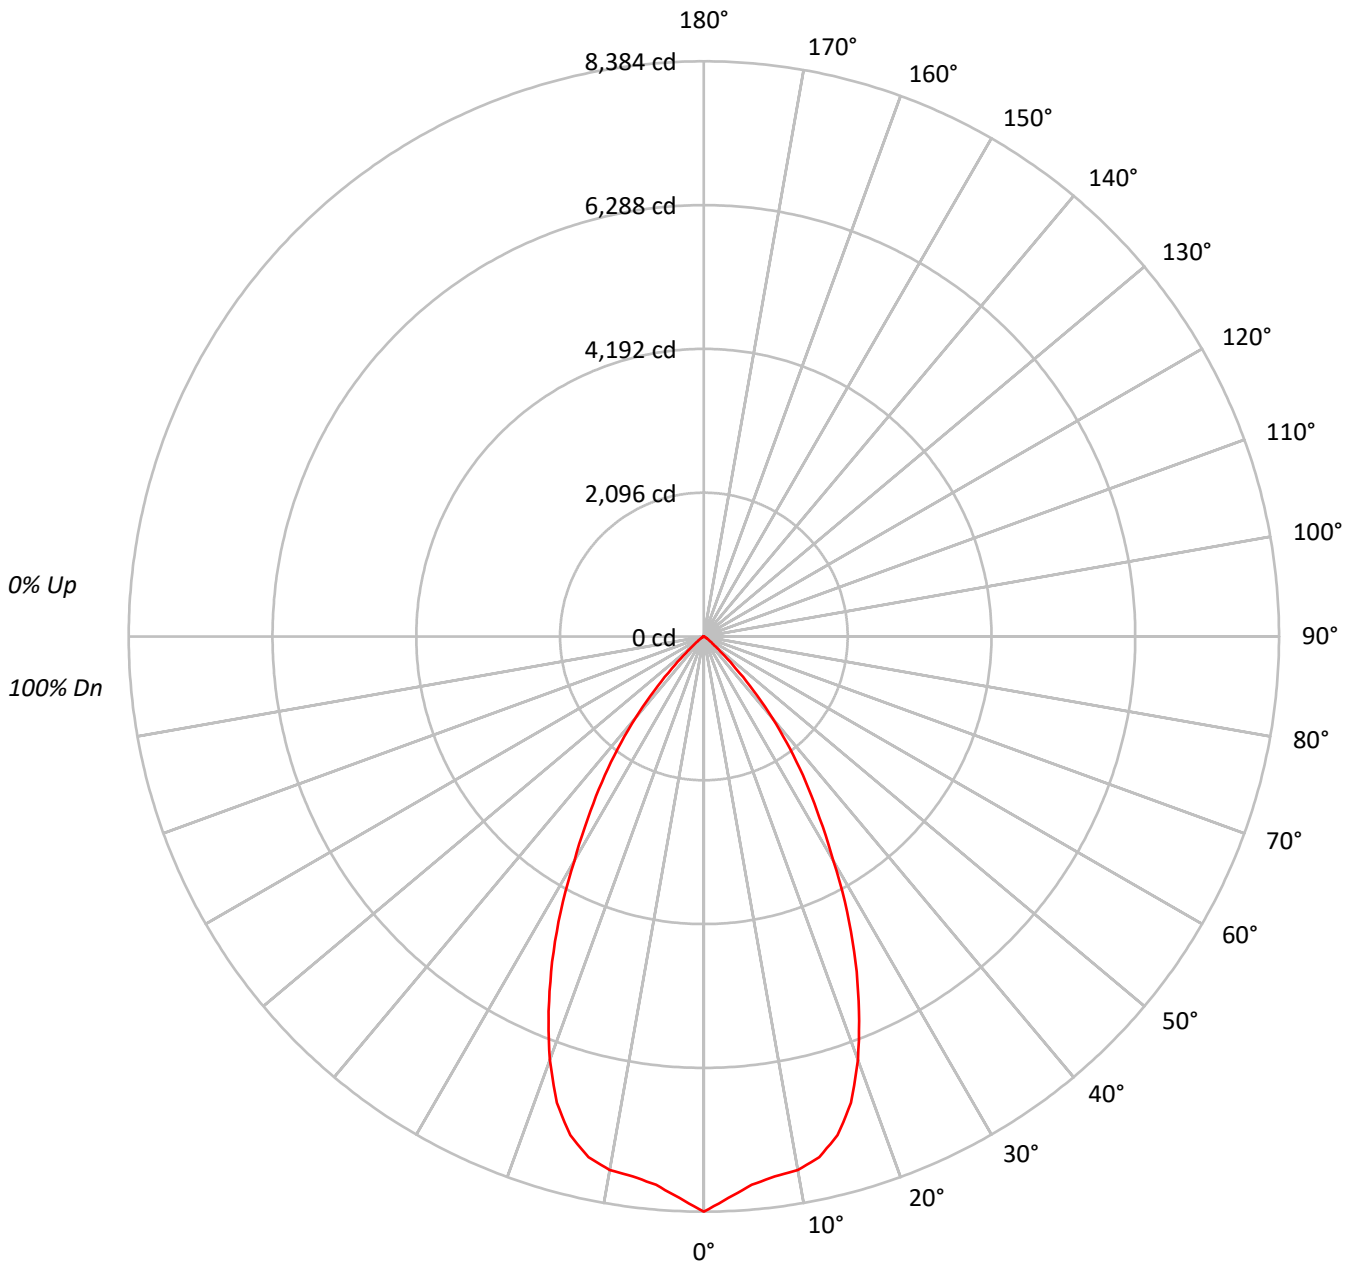



TEST NUMBER: P771449

CATALOG NUMBER: LD6D75BD010-EU6DR5570959024-6LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94			
2	108	103	99	96	106	101	98	95	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	81	78	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	70	67	74	70	67	65			
7	83	74	68	64	82	73	67	63	72	67	63	71	66	63	70	65	62	61			
8	79	69	63	59	78	69	63	59	68	63	59	67	62	59	66	62	58	57			
9	75	66	60	56	74	65	59	55	64	59	55	63	58	55	62	58	55	54			
10	72	62	56	52	71	61	56	52	61	56	52	60	55	52	59	55	52	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	915998
5°	879618
10°	876309
15°	851134
20°	763157
25°	630712
30°	476431
35°	345448
40°	221076
45°	100962
50°	33027
55°	14249
60°	6119
65°	801
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 100962 cd/sqm



TEST NUMBER: P771449

CATALOG NUMBER: LD6D75BD010-EU6DR5570959024-6LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	763.1	10.2
10°-20°	2082.8	27.9
20°-30°	2373.5	31.7
30°-40°	1615.8	21.6
40°-50°	556.8	7.4
50°-60°	77.0	1.0
60°-70°	7.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5219.4	69.8
0°-40°	6835.2	91.4
0°-60°	7469.0	99.9
0°-90°	7476.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7476.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	8384	
5°	8020	763
15°	7524	2083
25°	5232	2374
35°	2590	1616
45°	653	557
55°	75	77
65°	3	7
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771449

CATALOG NUMBER: LD6D75BD010-EU6DR5570959024-6LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	8383.6
2.5°	8191.4
5°	8020.0
7.5°	7935.9
10°	7898.5
12.5°	7773.8
15°	7524.5
17.5°	7128.7
20°	6563.5
22.5°	5911.1
25°	5231.7
27.5°	4524.2
30°	3776.3
32.5°	3142.6
35°	2589.9
37.5°	2064.2
40°	1550.0
42.5°	1074.2
45°	653.4
47.5°	352.2
50°	194.3
52.5°	115.3
55°	74.8
57.5°	47.8
60°	28.0
62.5°	12.5
65°	3.1
67.5°	1.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)