

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771599

Luminaire Tested: LD6D75BD010-EU6DR6570959024-6LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P771599
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR6570959024-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6405.7 lumens
Efficiency: N/A
Efficacy: 88.5 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771599

CATALOG NUMBER: LD6D75BD010-EU6DR6570959024-6LBDP1H

Luminous Intensity Polar Plot

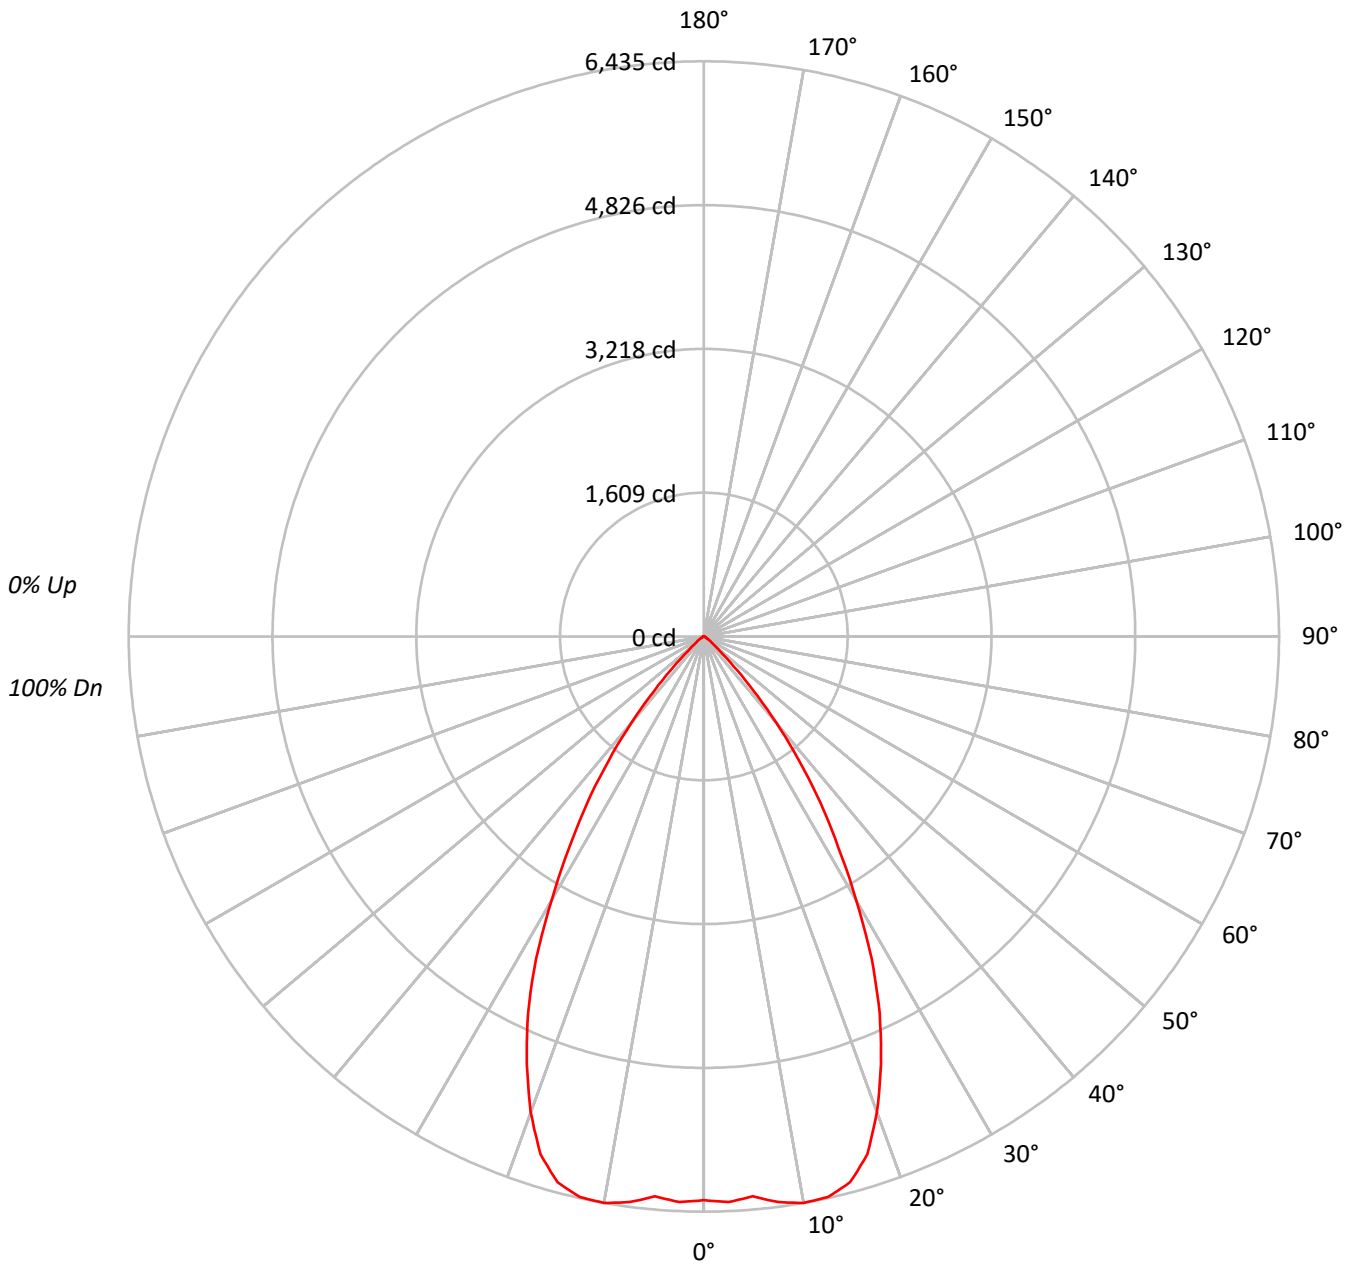



TEST NUMBER: P771599

CATALOG NUMBER: LD6D75BD010-EU6DR6570959024-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	689086
5°	689656
10°	713939
15°	715125
20°	658383
25°	560983
30°	429448
35°	303392
40°	179086
45°	72701
50°	26347
55°	14687
60°	8413
65°	4628
70°	4856
75°	3799
80°	3964
85°	3385

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 72701 cd/sqm



TEST NUMBER: P771599

CATALOG NUMBER: LD6D75BD010-EU6DR6570959024-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	607.3	9.5
10°-20°	1751.8	27.3
20°-30°	2101.8	32.8
30°-40°	1412.5	22.1
40°-50°	422.8	6.6
50°-60°	74.6	1.2
60°-70°	21.2	0.3
70°-80°	10.4	0.2
80°-90°	3.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4460.8	69.6
0°-40°	5873.3	91.7
0°-60°	6370.7	99.5
0°-90°	6405.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6405.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	6307	
5°	6288	607
15°	6322	1752
25°	4653	2102
35°	2275	1412
45°	470	423
55°	77	75
65°	18	21
75°	9	10
85°	3	3
90°	0	



TEST NUMBER: P771599

CATALOG NUMBER: LD6D75BD010-EU6DR6570959024-6LBDP1H

CANDELA DISTRIBUTION (FULL):

0°	
0°	6306.8
2.5°	6333.7
5°	6288.0
7.5°	6383.0
10°	6435.0
12.5°	6422.4
15°	6322.1
17.5°	6076.5
20°	5662.4
22.5°	5174.9
25°	4653.3
27.5°	4064.4
30°	3403.9
32.5°	2805.2
35°	2274.6
37.5°	1750.4
40°	1255.6
42.5°	820.1
45°	470.5
47.5°	249.2
50°	155.0
52.5°	107.5
55°	77.1
57.5°	55.6
60°	38.5
62.5°	25.1
65°	17.9
67.5°	16.1
70°	15.2
72.5°	11.7
75°	9.0
77.5°	8.1
80°	6.3
82.5°	4.5
85°	2.7
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)