

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771676

Luminaire Tested: LD6D75BD010-EU6DR7070959024-6LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P771676
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR7070959024-6LBDP1B
Description: 6 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4293.3 lumens
Efficiency: N/A
Efficacy: 59.3 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P771676
CATALOG NUMBER: LD6D75BD010-EU6DR7070959024-6LBDP1B

Luminous Intensity Polar Plot

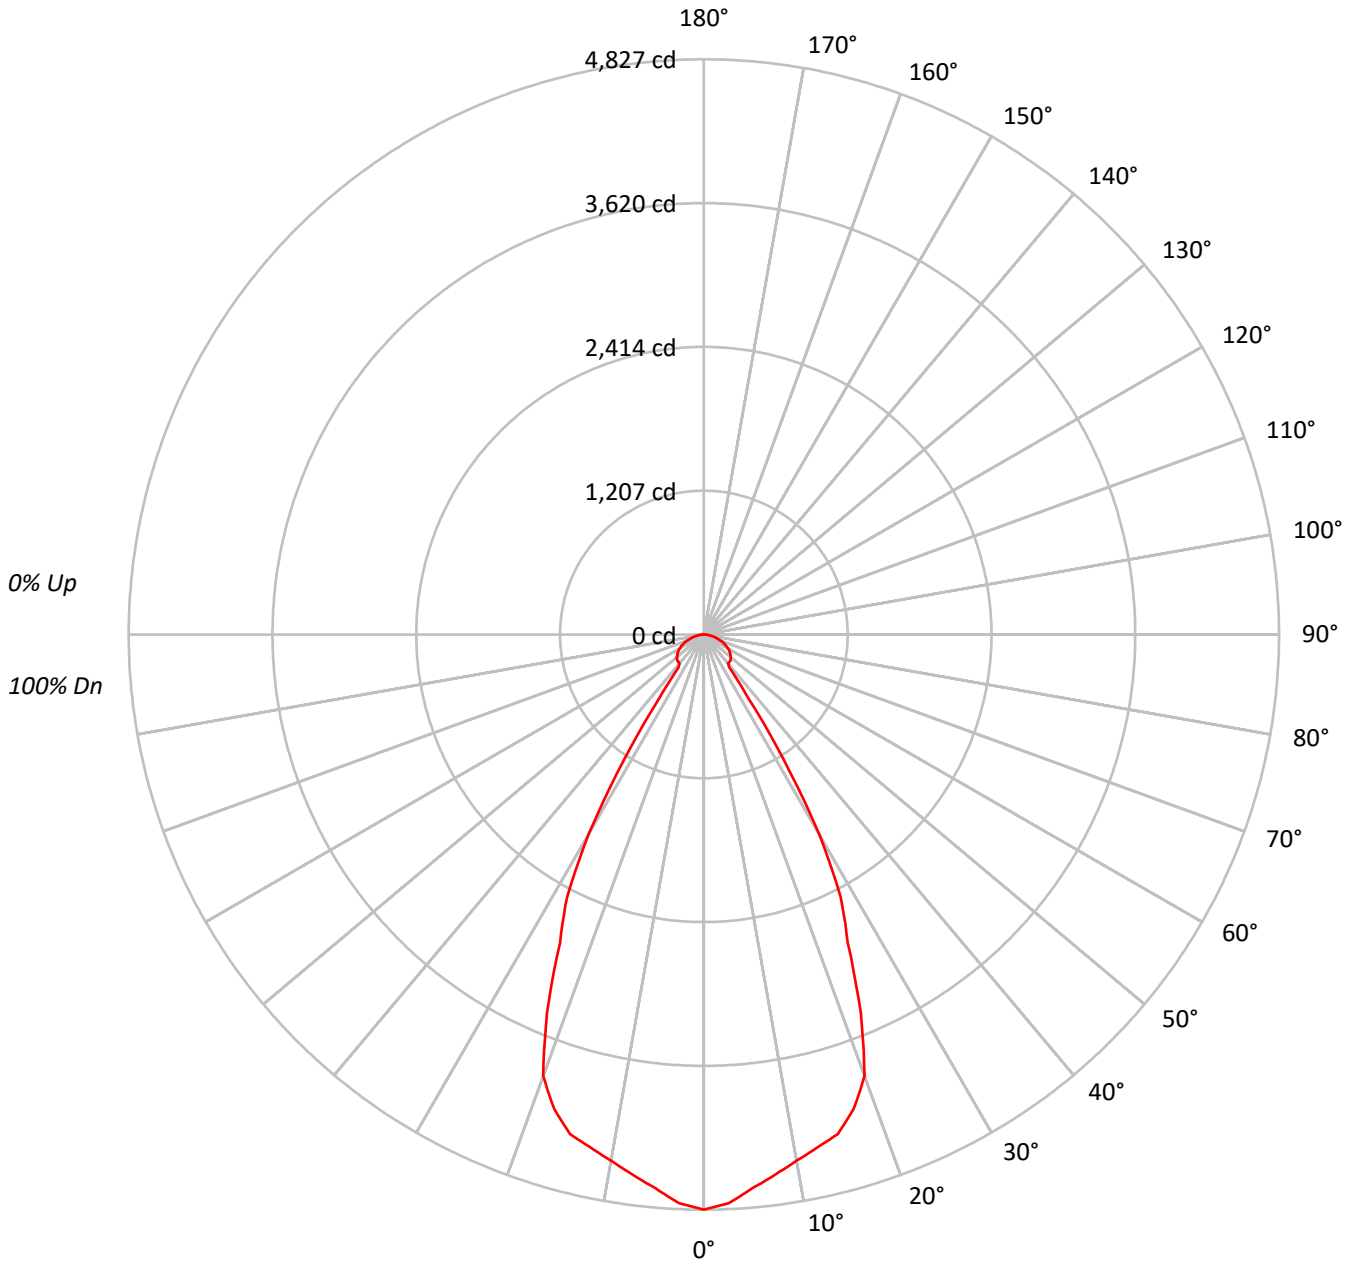



TEST NUMBER: P771676

CATALOG NUMBER: LD6D75BD010-EU6DR7070959024-6LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	527402
5°	511725
10°	497461
15°	490931
20°	458429
25°	344392
30°	243458
35°	86232
40°	45342
45°	48302
50°	50008
55°	50956
60°	51265
65°	50181
70°	47375
75°	43862
80°	38948
85°	31591

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 51285 cd/sqm



TEST NUMBER: P771676

CATALOG NUMBER: LD6D75BD010-EU6DR7070959024-6LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	440.1	10.3
10°-20°	1207.1	28.1
20°-30°	1329.5	31.0
30°-40°	508.0	11.8
40°-50°	239.8	5.6
50°-60°	238.4	5.6
60°-70°	190.9	4.4
70°-80°	109.7	2.6
80°-90°	29.8	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2976.6	69.3
0°-40°	3484.6	81.2
0°-60°	3962.8	92.3
0°-90°	4293.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4293.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4827	
5°	4666	440
15°	4340	1207
25°	2857	1329
35°	646	508
45°	313	240
55°	268	238
65°	194	191
75°	104	110
85°	25	30
90°	0	



TEST NUMBER: P771676

CATALOG NUMBER: LD6D75BD010-EU6DR7070959024-6LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	4827.0
2.5°	4776.5
5°	4665.7
7.5°	4573.2
10°	4483.8
12.5°	4408.1
15°	4340.1
17.5°	4175.8
20°	3942.7
22.5°	3439.9
25°	2856.7
27.5°	2486.8
30°	1929.7
32.5°	1246.5
35°	646.5
37.5°	349.3
40°	317.9
42.5°	315.6
45°	312.6
47.5°	305.7
50°	294.2
52.5°	281.2
55°	267.5
57.5°	252.2
60°	234.6
62.5°	214.8
65°	194.1
67.5°	171.2
70°	148.3
72.5°	125.3
75°	103.9
77.5°	81.8
80°	61.9
82.5°	43.6
85°	25.2
87.5°	9.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)