

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771071

Luminaire Tested: LD6D75BD010-EU6DR3070959027-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771071
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR3070959027-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8937.9 lumens
Efficiency: N/A
Efficacy: 123.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771071

CATALOG NUMBER: LD6D75BD010-EU6DR3070959027-6LBS1LI

Luminous Intensity Polar Plot

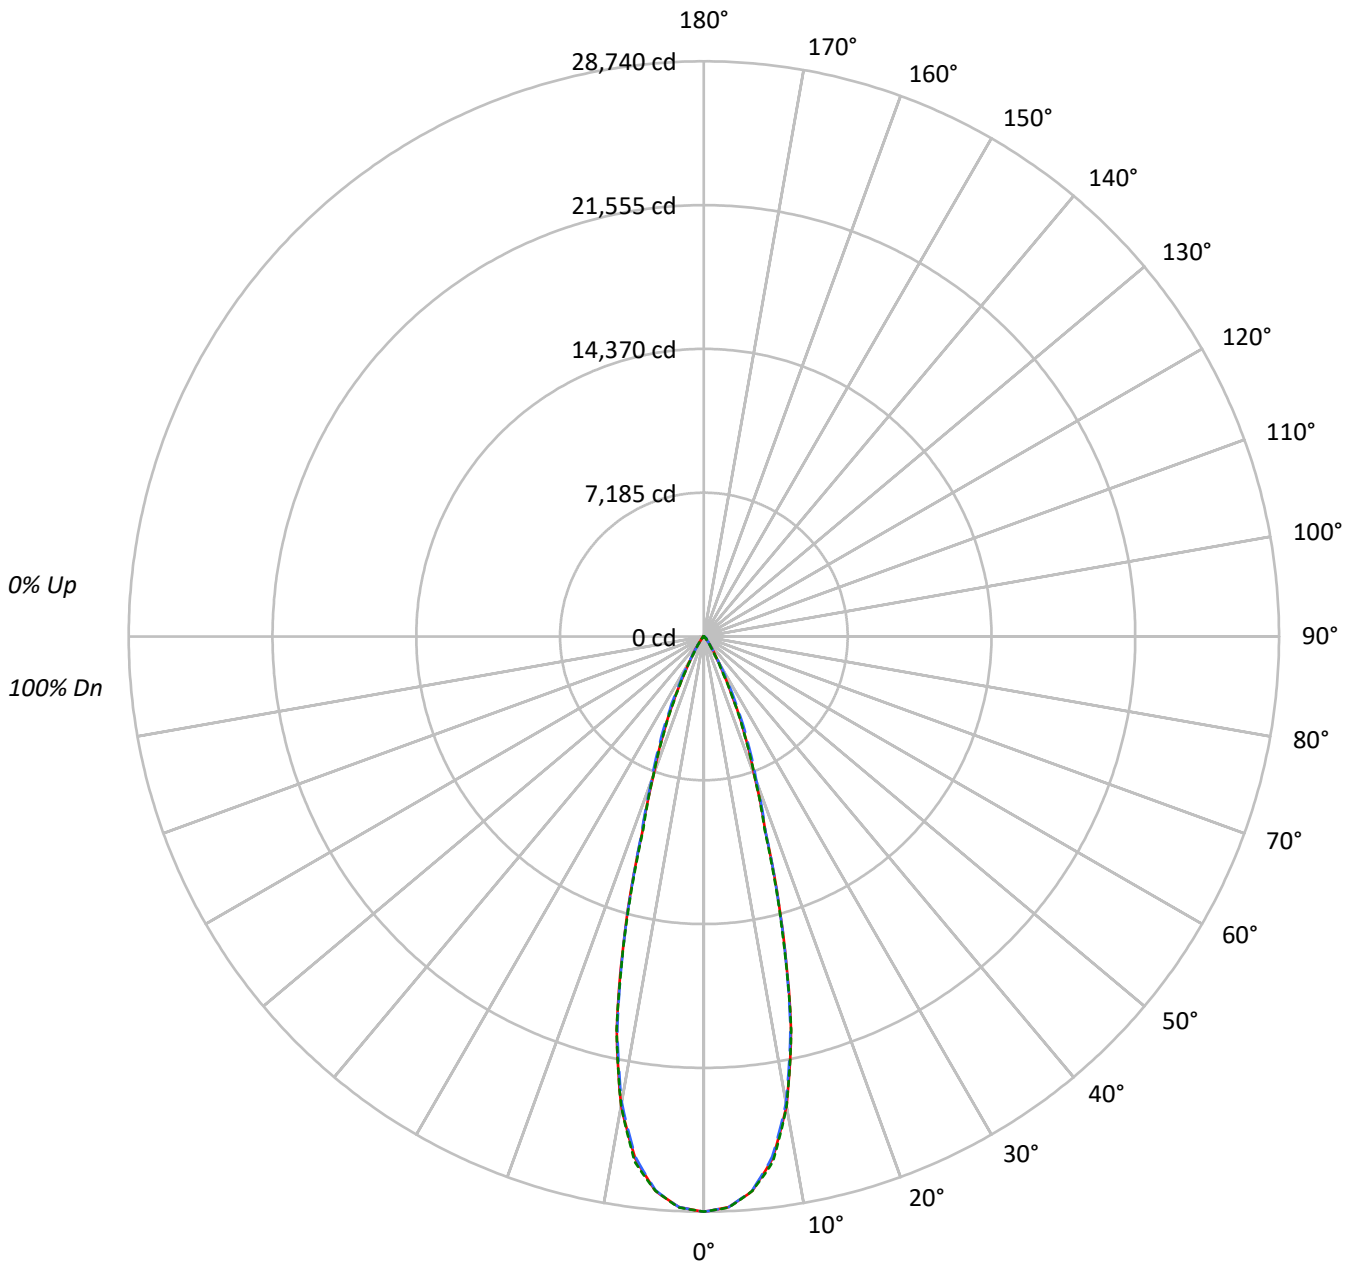



TEST NUMBER: P771071

CATALOG NUMBER: LD6D75BD010-EU6DR3070959027-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2199827	2199827	2199827
5°	2136672	2134183	2136780
10°	1850683	1837633	1850248
15°	1207482	1200992	1194953
20°	600427	622949	599620
25°	302455	341060	296256
30°	121096	131950	105505
35°	56168	53795	45095
40°	24251	26929	22842
45°	17103	21228	17255
50°	5883	15457	6216
55°	3390	6406	3576
60°	2373	2801	2373
65°	1539	1539	1539
70°	940	627	940
75°	0	414	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 21228 cd/sqm



TEST NUMBER: P771071

CATALOG NUMBER: LD6D75BD010-EU6DR3070959027-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2527.2	28.3
10°-20°	4070.1	45.5
20°-30°	1758.8	19.7
30°-40°	400.9	4.5
40°-50°	137.6	1.5
50°-60°	33.6	0.4
60°-70°	8.7	0.1
70°-80°	0.9	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	8356.1	93.5
0°-40°	8757.0	98.0
0°-60°	8928.2	99.9
0°-90°	8937.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8937.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	28740	28740	28740	28740	28740	
5°	27808	27782	27776	27834	27810	2529
15°	15238	15054	15156	15106	15080	4080
25°	3581	3717	4038	3622	3508	1714
35°	601	614	576	572	483	408
45°	158	196	196	196	159	112
55°	25	27	48	28	27	25
65°	8	8	8	8	8	8
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P771071

CATALOG NUMBER: LD6D75BD010-EU6DR3070959027-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	28739.6	28739.6	28739.6	28739.6	28739.6
2.5°	28549.1	28529.4	28540.7	28554.8	28560.4
5°	27808.3	27781.5	27775.9	27833.7	27809.7
7.5°	26314.1	26276.0	26218.1	26349.3	26472.1
10°	23810.9	23768.6	23643.0	23705.1	23805.3
12.5°	20115.5	19978.6	19975.8	20173.3	20146.5
15°	15237.6	15054.1	15155.7	15106.4	15079.5
17.5°	10246.8	10176.3	10311.7	10270.8	10094.4
20°	7371.2	7389.5	7647.7	7517.9	7361.3
22.5°	5378.8	5445.1	5751.3	5416.9	5294.1
25°	3581.2	3716.6	4038.3	3622.1	3507.8
27.5°	2202.6	2264.7	2590.6	2174.4	2112.3
30°	1370.1	1339.1	1492.9	1281.2	1193.7
32.5°	898.8	859.3	908.7	815.6	745.0
35°	601.1	613.8	575.7	571.5	482.6
37.5°	375.3	431.8	381.0	406.4	310.4
40°	242.7	313.2	269.5	297.7	228.6
42.5°	199.0	241.3	221.5	235.6	203.2
45°	158.0	196.1	196.1	196.1	159.4
47.5°	87.5	131.2	167.9	134.0	93.1
50°	49.4	66.3	129.8	69.1	52.2
52.5°	33.9	38.1	88.9	39.5	35.3
55°	25.4	26.8	48.0	28.2	26.8
57.5°	19.8	21.2	25.4	21.2	19.8
60°	15.5	15.5	18.3	16.9	15.5
62.5°	11.3	11.3	12.7	11.3	11.3
65°	8.5	8.5	8.5	8.5	8.5
67.5°	4.2	5.6	5.6	5.6	5.6
70°	4.2	2.8	2.8	2.8	4.2
72.5°	2.8	1.4	1.4	1.4	1.4
75°	0.0	0.0	1.4	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)