

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771079

Luminaire Tested: LD6D75BD010-EU6DR3070959030-6LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771079
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR3070959030-6LBDP1H
Description: 6 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8331.0 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight

TEST NUMBER: P771079

CATALOG NUMBER: LD6D75BD010-EU6DR3070959030-6LBDP1H

Luminous Intensity Polar Plot

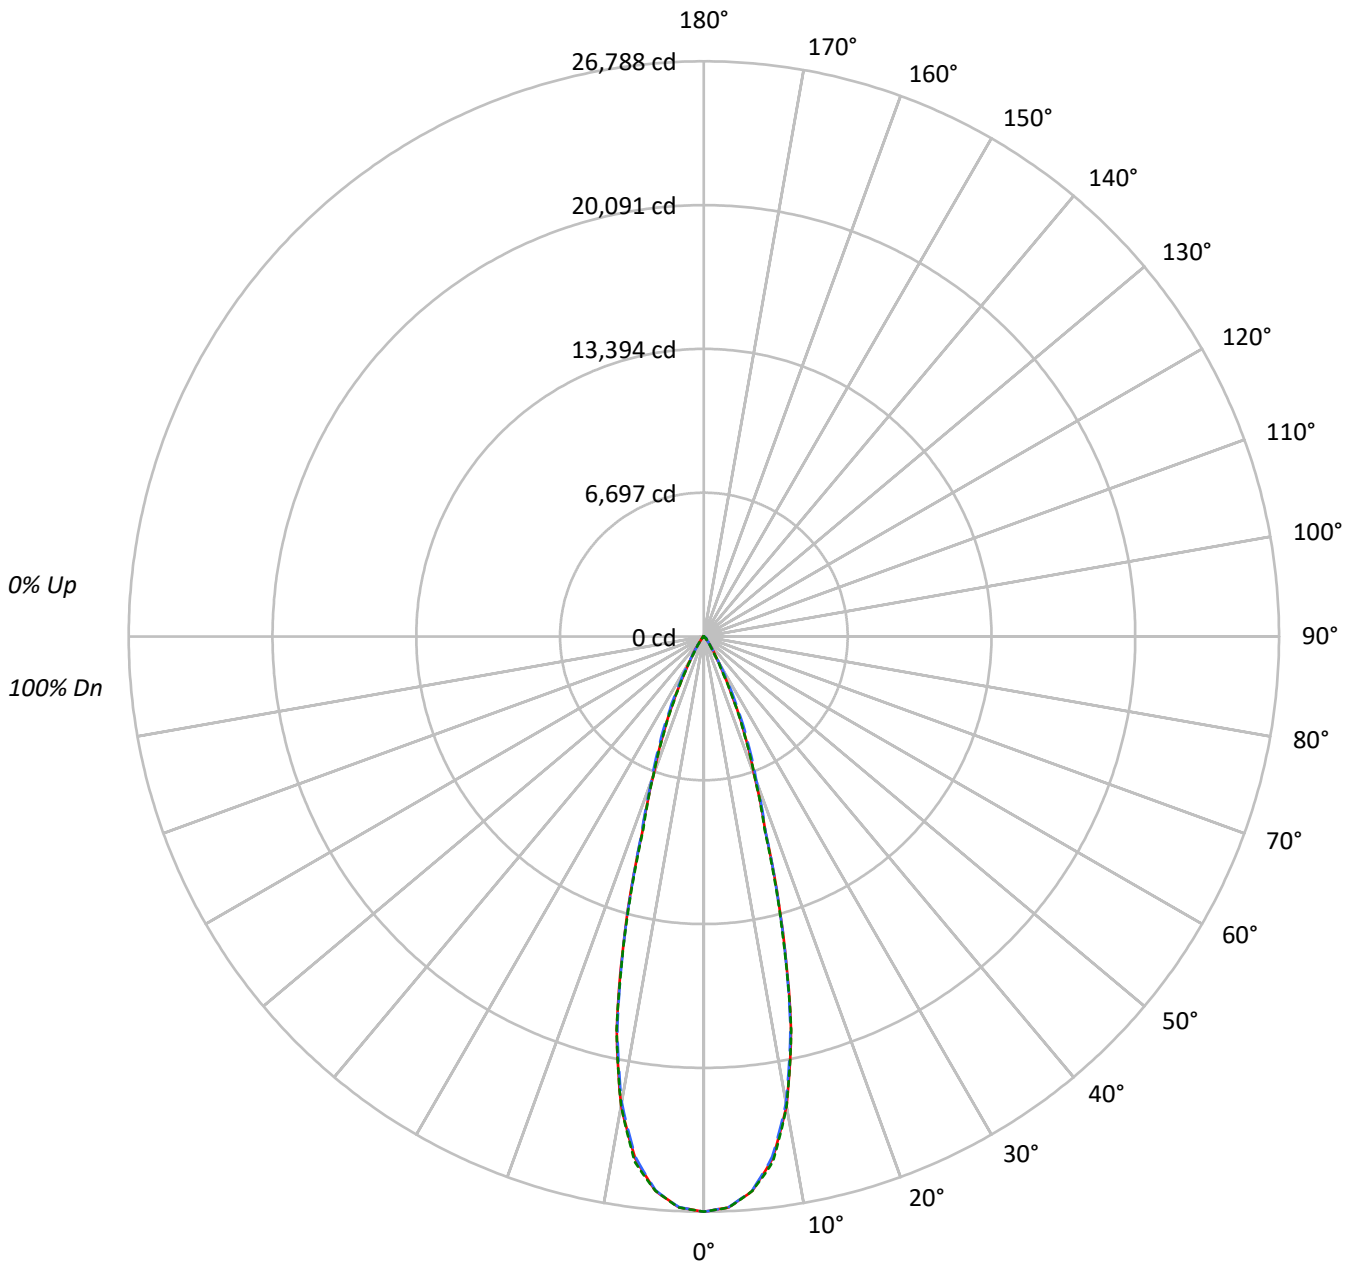



TEST NUMBER: P771079

CATALOG NUMBER: LD6D75BD010-EU6DR3070959030-6LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2050467	2050467	2050467
5°	1991599	1989278	1991706
10°	1725026	1712863	1724622
15°	1125496	1119450	1113824
20°	559658	580658	558909
25°	281915	317902	276138
30°	112876	122987	98346
35°	52356	50141	42030
40°	22602	25100	21293
45°	15945	19788	16086
50°	5478	14409	5799
55°	3163	5965	3336
60°	2220	2618	2220
65°	1431	1431	1431
70°	873	582	873
75°	0	384	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 19788 cd/sqm



TEST NUMBER: P771079

CATALOG NUMBER: LD6D75BD010-EU6DR3070959030-6LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2355.6	28.3
10°-20°	3793.8	45.5
20°-30°	1639.4	19.7
30°-40°	373.7	4.5
40°-50°	128.3	1.5
50°-60°	31.3	0.4
60°-70°	8.1	0.1
70°-80°	0.8	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	7788.8	93.5
0°-40°	8162.4	98.0
0°-60°	8322.0	99.9
0°-90°	8331.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8331.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	26788	26788	26788	26788	26788	
5°	25920	25895	25890	25944	25922	2358
15°	14203	14032	14127	14081	14056	3803
25°	3338	3464	3764	3376	3270	1598
35°	560	572	537	533	450	380
45°	147	183	183	183	149	105
55°	24	25	45	26	25	23
65°	8	8	8	8	8	8
75°	0	0	1	0	0	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P771079

CATALOG NUMBER: LD6D75BD010-EU6DR3070959030-6LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	26788.3	26788.3	26788.3	26788.3	26788.3
2.5°	26610.7	26592.3	26602.8	26616.0	26621.3
5°	25920.2	25895.3	25890.0	25943.9	25921.6
7.5°	24527.4	24491.9	24438.0	24560.3	24674.7
10°	22194.2	22154.8	22037.7	22095.6	22189.0
12.5°	18749.7	18622.1	18619.5	18803.6	18778.6
15°	14203.0	14032.0	14126.7	14080.7	14055.7
17.5°	9551.1	9485.3	9611.6	9573.4	9409.0
20°	6870.7	6887.8	7128.5	7007.5	6861.5
22.5°	5013.6	5075.4	5360.8	5049.1	4934.7
25°	3338.0	3464.3	3764.1	3376.2	3269.6
27.5°	2053.0	2110.9	2414.7	2026.7	1968.9
30°	1277.1	1248.1	1391.5	1194.2	1112.7
32.5°	837.8	801.0	847.0	760.2	694.4
35°	560.3	572.1	536.6	532.7	449.8
37.5°	349.8	402.5	355.1	378.8	289.3
40°	226.2	292.0	251.2	277.5	213.1
42.5°	185.4	224.9	206.5	219.6	189.4
45°	147.3	182.8	182.8	182.8	148.6
47.5°	81.5	122.3	156.5	124.9	86.8
50°	46.0	61.8	121.0	64.4	48.7
52.5°	31.6	35.5	82.9	36.8	32.9
55°	23.7	25.0	44.7	26.3	25.0
57.5°	18.4	19.7	23.7	19.7	18.4
60°	14.5	14.5	17.1	15.8	14.5
62.5°	10.5	10.5	11.8	10.5	10.5
65°	7.9	7.9	7.9	7.9	7.9
67.5°	3.9	5.3	5.3	5.3	5.3
70°	3.9	2.6	2.6	2.6	3.9
72.5°	2.6	1.3	1.3	1.3	1.3
75°	0.0	0.0	1.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)