

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771653

Luminaire Tested: LD6D75BD010-EU6DR6570959040-6LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P771653  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D75BD010-EU6DR6570959040-6LBDP1MW  
Description: 6 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6822.4 lumens  
Efficiency: N/A  
Efficacy: 94.2 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight

TEST NUMBER: P771653

CATALOG NUMBER: LD6D75BD010-EU6DR6570959040-6LBDP1MW

### Luminous Intensity Polar Plot

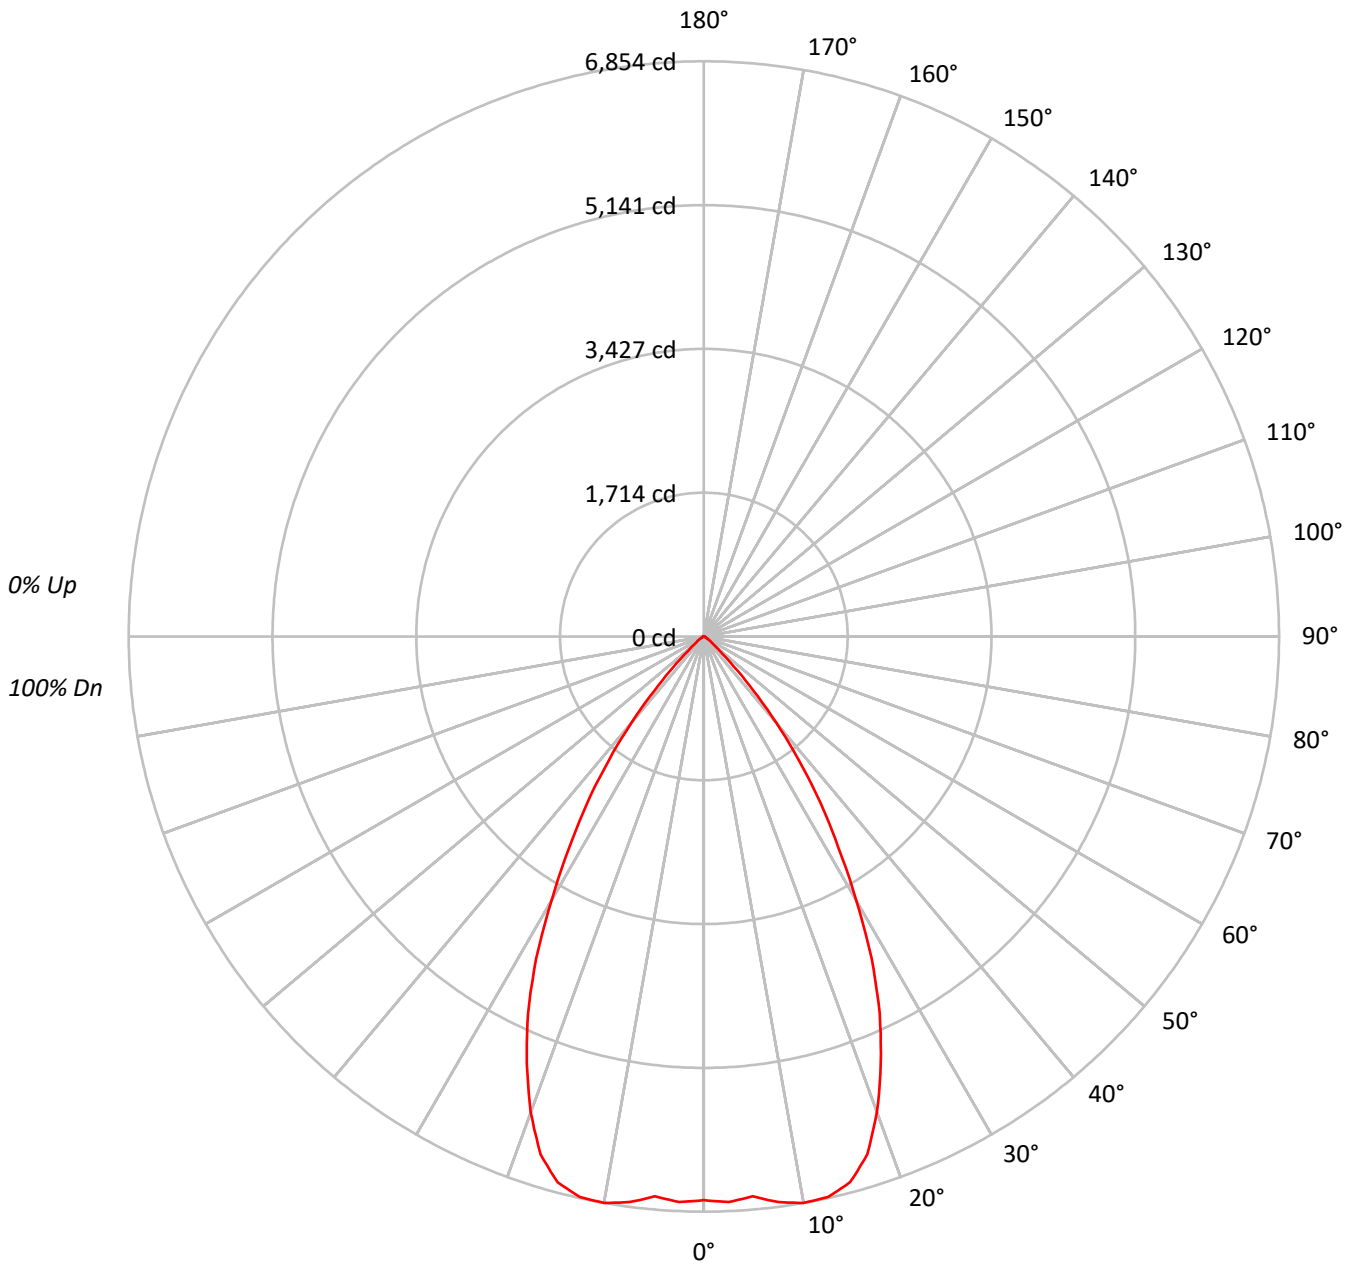



TEST NUMBER: P771653  
 CATALOG NUMBER: LD6D75BD010-EU6DR6570959040-6LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	733926
5°	734525
10°	760393
15°	761649
20°	701218
25°	597475
30°	457393
35°	323133
40°	190739
45°	77429
50°	28064
55°	15639
60°	8959
65°	4938
70°	5175
75°	4010
80°	4216
85°	3636

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 77429 cd/sqm



TEST NUMBER: P771653

CATALOG NUMBER: LD6D75BD010-EU6DR6570959040-6LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	646.8	9.5
10°-20°	1865.7	27.3
20°-30°	2238.5	32.8
30°-40°	1504.3	22.1
40°-50°	450.3	6.6
50°-60°	79.5	1.2
60°-70°	22.6	0.3
70°-80°	11.1	0.2
80°-90°	3.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4751.1	69.6
0°-40°	6255.4	91.7
0°-60°	6785.2	99.5
0°-90°	6822.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	6822.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	6717	
5°	6697	647
15°	6733	1866
25°	4956	2239
35°	2423	1504
45°	501	450
55°	82	79
65°	19	23
75°	10	11
85°	3	4
90°	0	



TEST NUMBER: P771653  
CATALOG NUMBER: LD6D75BD010-EU6DR6570959040-6LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	6717.2
2.5°	6745.8
5°	6697.1
7.5°	6798.3
10°	6853.7
12.5°	6840.3
15°	6733.4
17.5°	6471.8
20°	6030.8
22.5°	5511.6
25°	4956.0
27.5°	4328.9
30°	3625.4
32.5°	2987.7
35°	2422.6
37.5°	1864.2
40°	1337.3
42.5°	873.4
45°	501.1
47.5°	265.4
50°	165.1
52.5°	114.5
55°	82.1
57.5°	59.2
60°	41.0
62.5°	26.7
65°	19.1
67.5°	17.2
70°	16.2
72.5°	12.4
75°	9.5
77.5°	8.6
80°	6.7
82.5°	4.8
85°	2.9
87.5°	1.9
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)