

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771279

Luminaire Tested: LD6D75BD010-EU6DR4070959050-6LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P771279
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-28)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D75BD010-EU6DR4070959050-6LBS1LI
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 40° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10486.7 lumens
Efficiency: N/A
Efficacy: 144.8 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.6
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct


Input Watts (W): 72.4
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT



Downlight

TEST NUMBER: P771279
CATALOG NUMBER: LD6D75BD010-EU6DR4070959050-6LBS1LI

Luminous Intensity Polar Plot

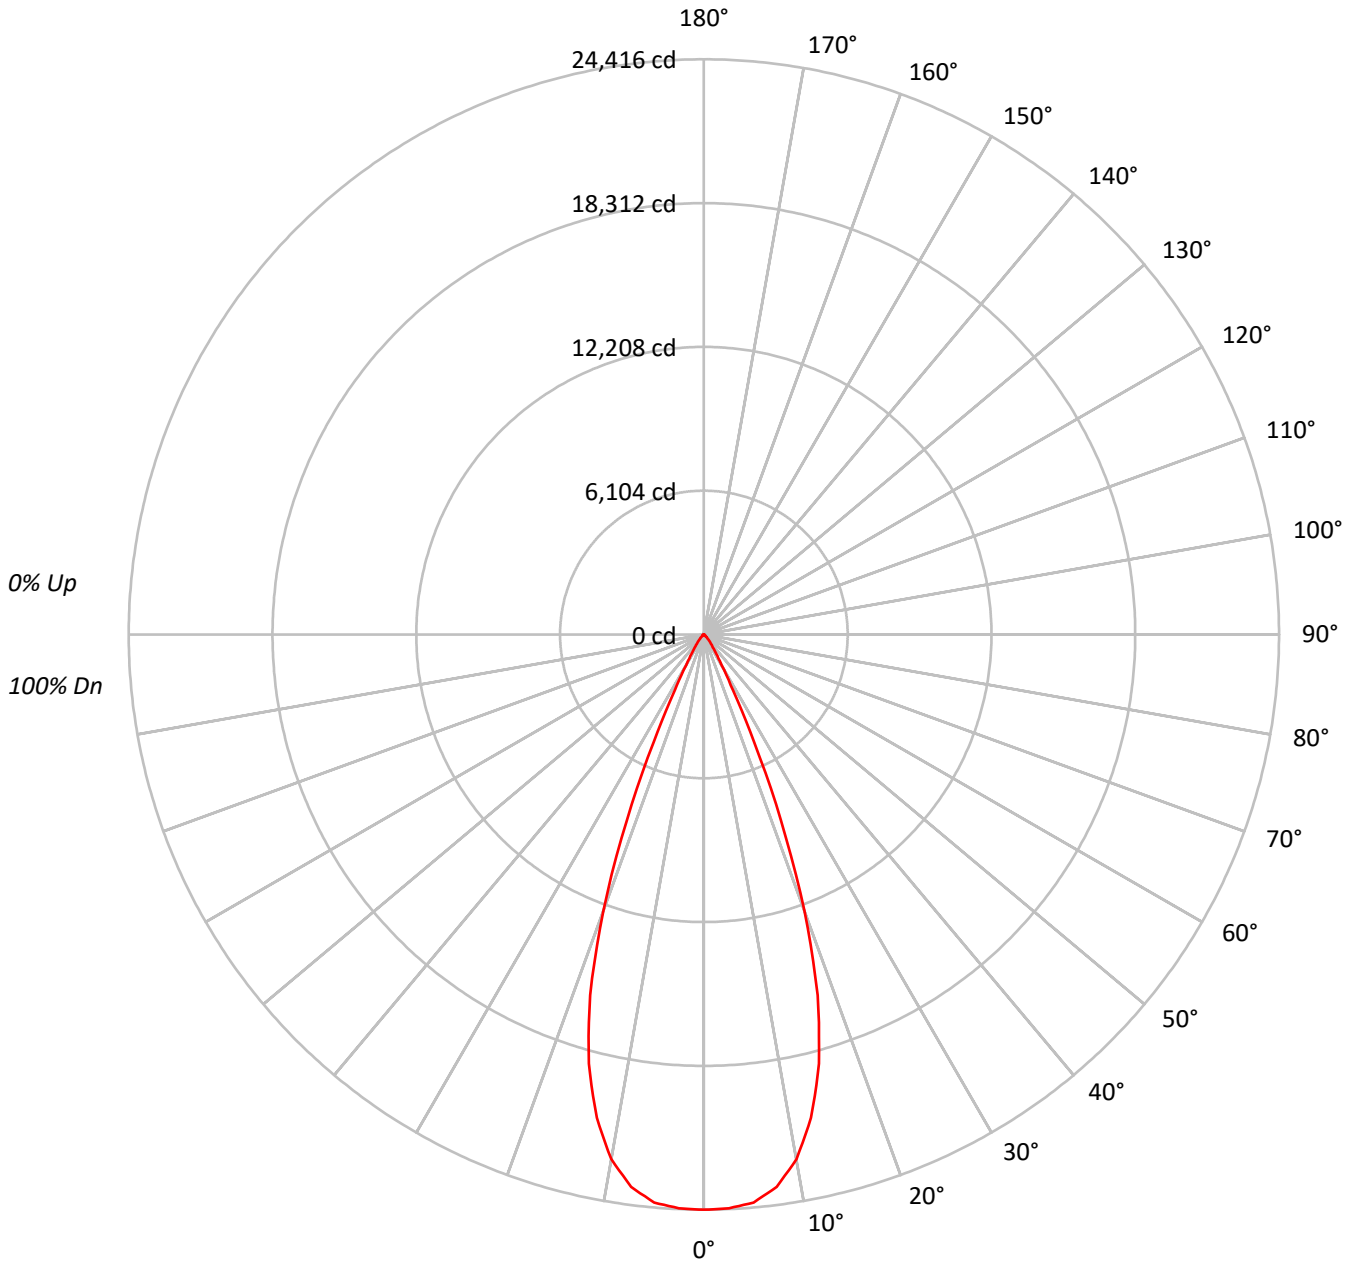



TEST NUMBER: P771279

CATALOG NUMBER: LD6D75BD010-EU6DR4070959050-6LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	97	96	96	96	96
2	110	106	103	100	108	105	102	99	102	99	97	99	97	95	96	95	93	92	92	92	92
3	106	101	97	94	104	100	96	93	97	94	92	95	93	90	93	91	89	88	88	88	88
4	102	97	92	89	101	95	91	88	93	90	87	92	89	86	90	87	85	84	84	84	84
5	99	92	88	84	97	91	87	84	90	86	83	88	85	83	87	84	82	81	81	81	81
6	95	88	84	80	94	88	83	80	86	82	80	85	82	79	84	81	79	77	77	77	77
7	92	85	80	77	91	84	80	77	83	79	76	82	79	76	81	78	76	74	74	74	74
8	89	82	77	74	88	81	77	74	80	76	73	79	76	73	78	75	73	72	72	72	72
9	86	79	74	71	85	78	74	71	77	73	71	76	73	70	76	72	70	69	69	69	69
10	83	76	71	68	82	75	71	68	75	71	68	74	70	68	73	70	68	67	67	67	67

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2667678
5°	2654715
10°	2509283
15°	2133214
20°	1453934
25°	606637
30°	190747
35°	88660
40°	49022
45°	22482
50°	10913
55°	5981
60°	3125
65°	1112
70°	447
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22482 cd/sqm



TEST NUMBER: P771279

CATALOG NUMBER: LD6D75BD010-EU6DR4070959050-6LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	2260.1	21.6
10°-20°	5063.2	48.3
20°-30°	2534.5	24.2
30°-40°	464.6	4.4
40°-50°	128.2	1.2
50°-60°	30.1	0.3
60°-70°	5.8	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	9857.8	94.0
0°-40°	10322.4	98.4
0°-60°	10480.7	99.9
0°-90°	10486.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	10486.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	24416	
5°	24205	###
15°	18859	5063
25°	5032	2534
35°	665	465
45°	146	128
55°	31	30
65°	4	6
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771279

CATALOG NUMBER: LD6D75BD010-EU6DR4070959050-6LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	24415.7
2.5°	24380.0
5°	24204.6
7.5°	23645.5
10°	22617.1
12.5°	21013.9
15°	18858.8
17.5°	16056.0
20°	12504.5
22.5°	8525.1
25°	5032.0
27.5°	2660.1
30°	1511.9
32.5°	977.0
35°	664.7
37.5°	475.0
40°	343.7
42.5°	235.3
45°	145.5
47.5°	92.7
50°	64.2
52.5°	45.6
55°	31.4
57.5°	20.0
60°	14.3
62.5°	8.6
65°	4.3
67.5°	2.9
70°	1.4
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)