

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P771746

Luminaire Tested: LD6D75BD010-EU6DR7070959050-6LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P771746  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D75BD010-EU6DR7070959050-6LBS1H  
Description: 6 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9657.0 lumens  
Efficiency: N/A  
Efficacy: 133.4 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct


Input Watts (W): 72.4  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT



Downlight

TEST NUMBER: P771746  
CATALOG NUMBER: LD6D75BD010-EU6DR7070959050-6LBS1H

### Luminous Intensity Polar Plot

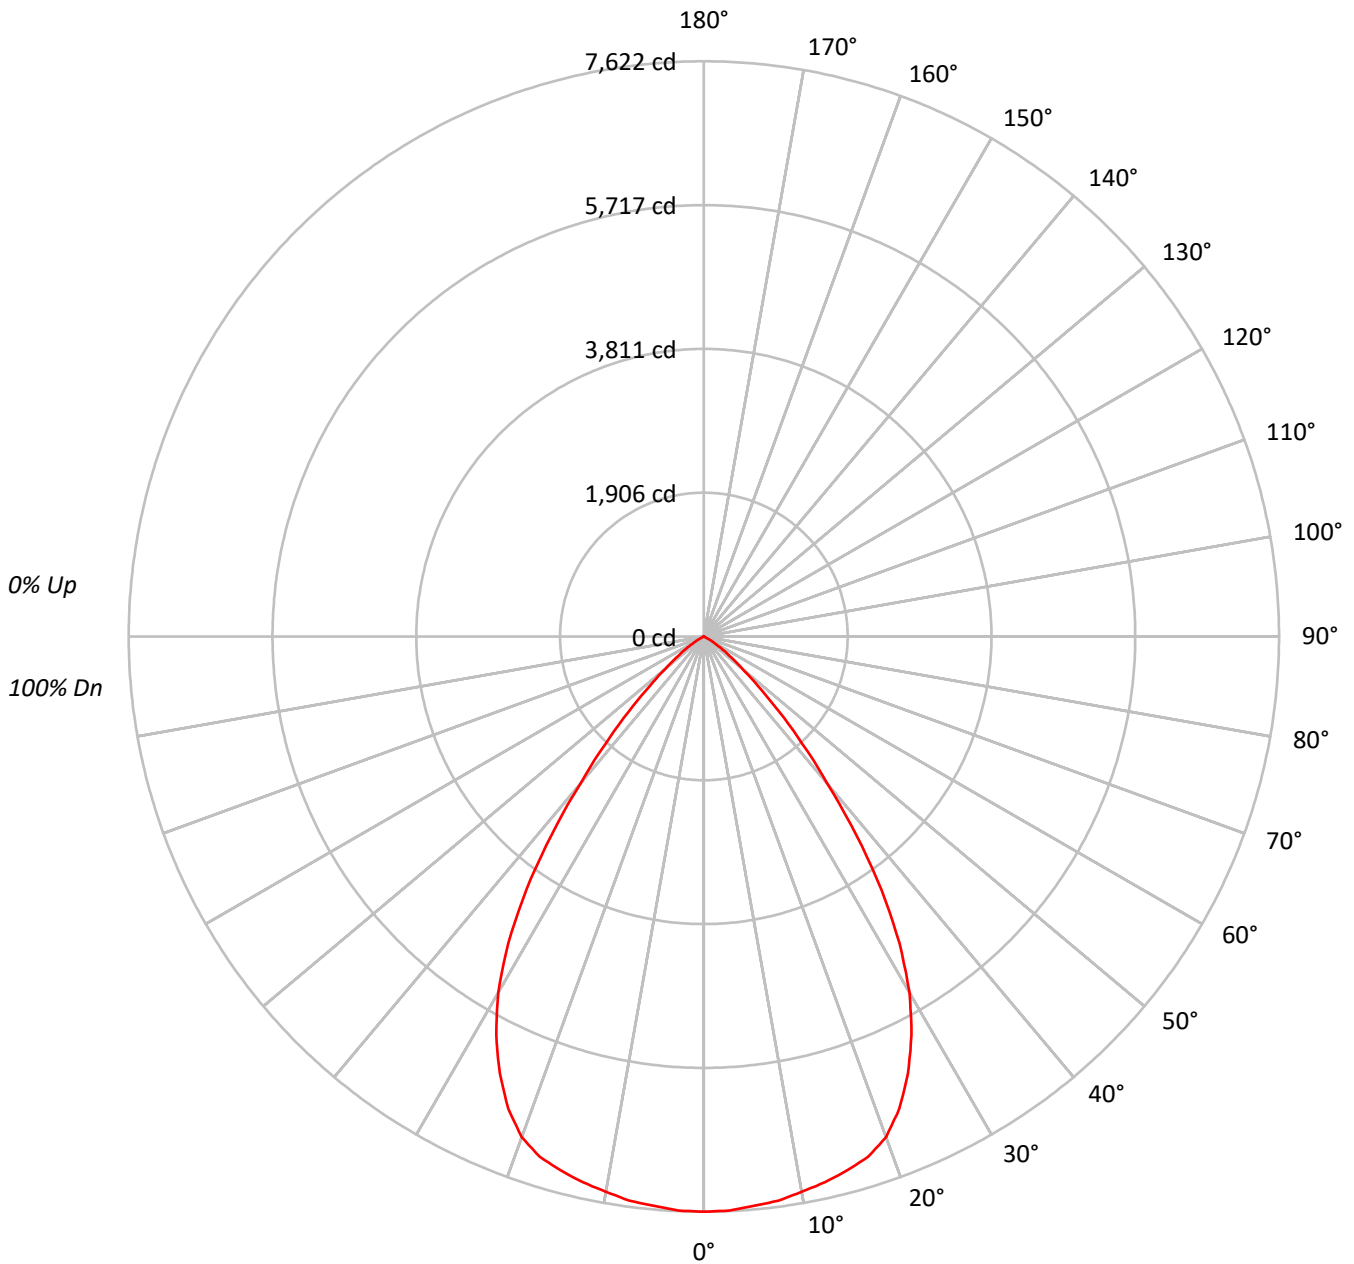



TEST NUMBER: P771746

CATALOG NUMBER: LD6D75BD010-EU6DR7070959050-6LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93						93													
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85						85													
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78						78													
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71						71													
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65						65													
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60						60													
7	80	69	63	58	78	69	62	58	67	62	58	66	61	57	65	61	57	56						56													
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51						51													
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48						48													
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44						44													

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	832796
5°	830724
10°	828924
15°	828692
20°	820584
25°	770834
30°	687200
35°	547910
40°	363820
45°	217500
50°	112764
55°	59262
60°	20956
65°	362
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 217500 cd/sqm



TEST NUMBER: P771746

CATALOG NUMBER: LD6D75BD010-EU6DR7070959050-6LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	720.3	7.5
10°-20°	2065.8	21.4
20°-30°	2914.3	30.2
30°-40°	2515.8	26.1
40°-50°	1126.6	11.7
50°-60°	294.9	3.1
60°-70°	19.2	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	5700.4	59.0
0°-40°	8216.2	85.1
0°-60°	9637.8	99.8
0°-90°	9657.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	9657.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	7622	
5°	7574	720
15°	7326	2066
25°	6394	2914
35°	4108	2516
45°	1408	1127
55°	311	295
65°	1	19
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P771746

CATALOG NUMBER: LD6D75BD010-EU6DR7070959050-6LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	7622.1
2.5°	7613.9
5°	7574.2
7.5°	7541.3
10°	7471.4
12.5°	7408.3
15°	7326.1
17.5°	7231.5
20°	7057.4
22.5°	6771.0
25°	6394.0
27.5°	5956.8
30°	5446.9
32.5°	4823.3
35°	4107.8
37.5°	3318.3
40°	2550.8
42.5°	1938.1
45°	1407.6
47.5°	970.4
50°	663.4
52.5°	457.8
55°	311.1
57.5°	187.8
60°	95.9
62.5°	30.2
65°	1.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)