

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759167

Luminaire Tested: LD6D08D010-EU6DR300210IC9027-6LBS1B

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P759167
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD6D08D010-EU6DR300210IC9027-6LBS1B
Description: 6 INCH ROUND SHALLOW SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 725.6 lumens
Efficiency: N/A
Efficacy: 81.5 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 8.9
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P759167
CATALOG NUMBER: LD6D08D010-EU6DR300210IC9027-6LBS1B

Luminous Intensity Polar Plot

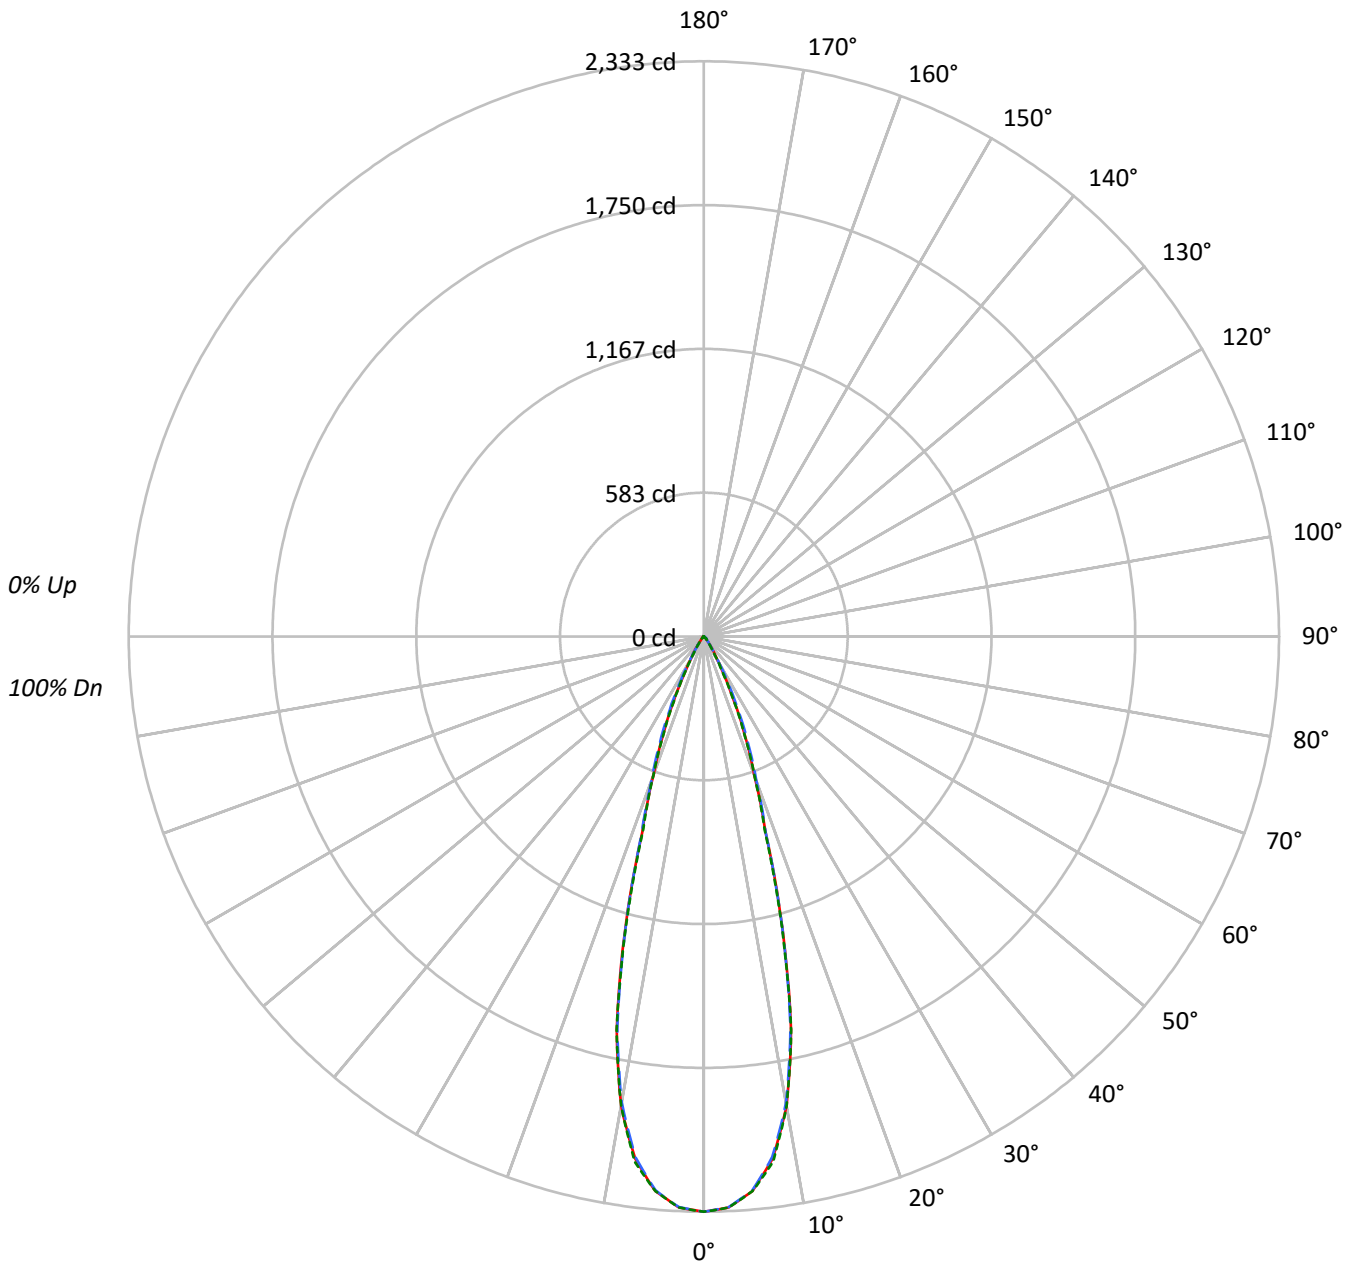



TEST NUMBER: P759167

CATALOG NUMBER: LD6D08D010-EU6DR300210IC9027-6LBS1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	178599	178599	178599
5°	173472	173265	173480
10°	150249	149192	150218
15°	98032	97509	97018
20°	48743	50576	48678
25°	24551	27685	24053
30°	9828	10712	8564
35°	4560	4373	3663
40°	1968	2188	1859
45°	1386	1721	1396
50°	476	1250	500
55°	280	520	294
60°	199	230	199
65°	127	127	127
70°	67	45	67
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 1721 cd/sqm



TEST NUMBER: P759167

CATALOG NUMBER: LD6D08D010-EU6DR300210IC9027-6LBS1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	205.2	28.3
10°-20°	330.4	45.5
20°-30°	142.8	19.7
30°-40°	32.6	4.5
40°-50°	11.2	1.5
50°-60°	2.7	0.4
60°-70°	0.7	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	678.4	93.5
0°-40°	711.0	98.0
0°-60°	724.9	99.9
0°-90°	725.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	725.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2333	2333	2333	2333	2333	
5°	2258	2256	2255	2260	2258	205
15°	1237	1222	1230	1226	1224	331
25°	291	302	328	294	285	139
35°	49	50	47	46	39	33
45°	13	16	16	16	13	9
55°	2	2	4	2	2	2
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P759167

CATALOG NUMBER: LD6D08D010-EU6DR300210IC9027-6LBS1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2333.3	2333.3	2333.3	2333.3	2333.3
2.5°	2317.8	2316.2	2317.1	2318.3	2318.7
5°	2257.7	2255.5	2255.0	2259.7	2257.8
7.5°	2136.4	2133.3	2128.6	2139.2	2149.2
10°	1933.1	1929.7	1919.5	1924.5	1932.7
12.5°	1633.1	1622.0	1621.8	1637.8	1635.6
15°	1237.1	1222.2	1230.5	1226.5	1224.3
17.5°	831.9	826.2	837.2	833.9	819.5
20°	598.4	599.9	620.9	610.4	597.6
22.5°	436.7	442.1	467.0	439.8	429.8
25°	290.7	301.7	327.8	294.0	284.8
27.5°	178.8	183.9	210.3	176.5	171.5
30°	111.2	108.7	121.2	104.0	96.9
32.5°	73.0	69.8	73.8	66.2	60.5
35°	48.8	49.8	46.8	46.4	39.2
37.5°	30.5	35.1	30.9	33.0	25.2
40°	19.7	25.4	21.9	24.2	18.6
42.5°	16.2	19.6	18.0	19.1	16.5
45°	12.8	15.9	15.9	15.9	12.9
47.5°	7.1	10.7	13.6	10.9	7.6
50°	4.0	5.4	10.5	5.6	4.2
52.5°	2.8	3.1	7.2	3.2	2.9
55°	2.1	2.2	3.9	2.3	2.2
57.5°	1.6	1.7	2.1	1.7	1.6
60°	1.3	1.3	1.5	1.4	1.3
62.5°	0.9	0.9	1.0	0.9	0.9
65°	0.7	0.7	0.7	0.7	0.7
67.5°	0.3	0.5	0.5	0.5	0.5
70°	0.3	0.2	0.2	0.2	0.3
72.5°	0.2	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)