

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P759416

Luminaire Tested: LD6D08D010-EU6DR450210IC9030-6LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P759416  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD6D08D010-EU6DR450210IC9030-6LBS1LI  
Description: 6 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 45° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 880.0 lumens  
Efficiency: N/A  
Efficacy: 98.9 lumens/watt  
Spacing Criteria (0/90/45): 0.75 / 0.75 / 0.69  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 8.9  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P759416  
CATALOG NUMBER: LD6D08D010-EU6DR450210IC9030-6LBS1LI

### Luminous Intensity Polar Plot

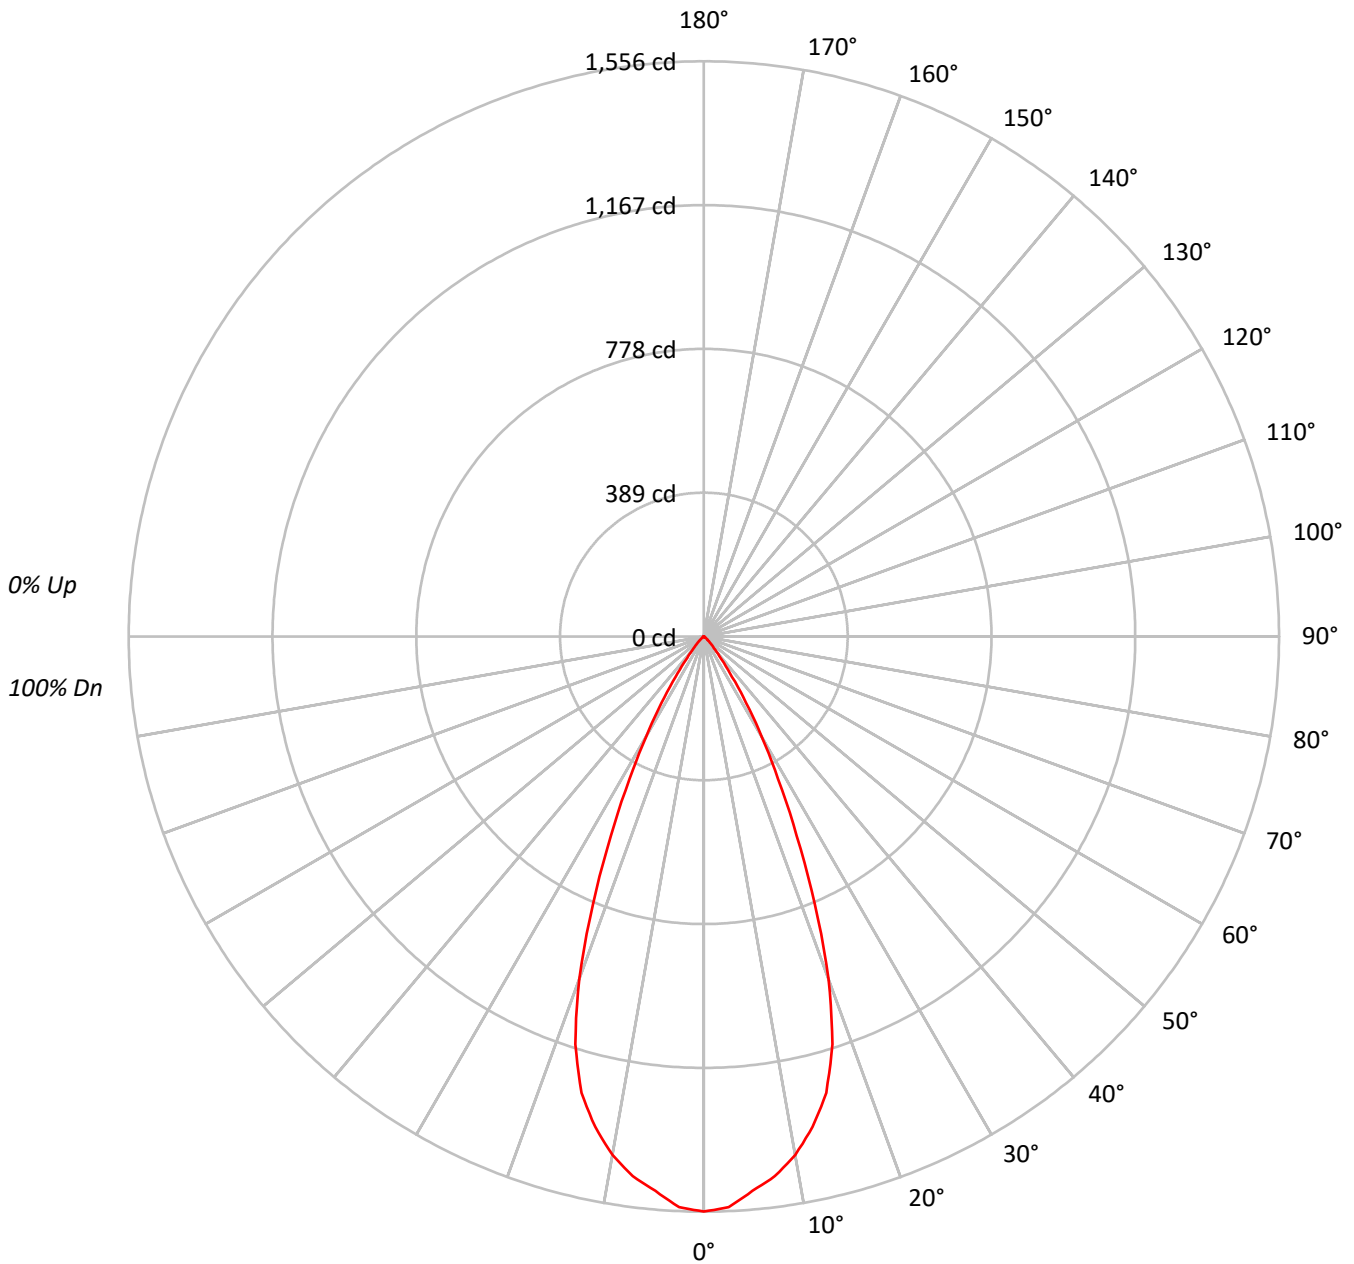



TEST NUMBER: P759416

CATALOG NUMBER: LD6D08D010-EU6DR450210IC9030-6LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     | 0  |    |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    |
| 1   | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 98  | 98  | 97  | 95  |    |    |
| 2   | 109 | 105 | 102 | 99  | 107 | 103 | 100 | 98  | 100 | 98  | 95  | 97  | 95  | 93  | 95  | 93  | 91  | 90  |    |    |
| 3   | 105 | 99  | 95  | 91  | 103 | 98  | 94  | 91  | 95  | 92  | 89  | 93  | 90  | 88  | 91  | 89  | 87  | 85  |    |    |
| 4   | 100 | 94  | 89  | 85  | 99  | 93  | 88  | 85  | 91  | 87  | 84  | 89  | 86  | 83  | 87  | 84  | 82  | 81  |    |    |
| 5   | 96  | 89  | 84  | 80  | 95  | 88  | 83  | 80  | 86  | 82  | 79  | 85  | 81  | 79  | 83  | 80  | 78  | 77  |    |    |
| 6   | 92  | 85  | 80  | 76  | 91  | 84  | 79  | 76  | 83  | 78  | 75  | 81  | 77  | 75  | 80  | 77  | 74  | 73  |    |    |
| 7   | 89  | 81  | 75  | 72  | 87  | 80  | 75  | 72  | 79  | 74  | 71  | 78  | 74  | 71  | 77  | 73  | 71  | 69  |    |    |
| 8   | 85  | 77  | 72  | 68  | 84  | 76  | 71  | 68  | 75  | 71  | 68  | 74  | 70  | 67  | 73  | 70  | 67  | 66  |    |    |
| 9   | 82  | 73  | 68  | 65  | 81  | 73  | 68  | 65  | 72  | 68  | 65  | 71  | 67  | 64  | 71  | 67  | 64  | 63  |    |    |
| 10  | 79  | 70  | 65  | 62  | 78  | 70  | 65  | 62  | 69  | 65  | 62  | 68  | 64  | 61  | 68  | 64  | 61  | 60  |    |    |

**AVERAGE LUMINANCE (cd/sqm):**

|     |        |
|-----|--------|
|     | 0°     |
| 0°  | 169966 |
| 5°  | 165120 |
| 10° | 157976 |
| 15° | 144584 |
| 20° | 114703 |
| 25° | 71610  |
| 30° | 39464  |
| 35° | 17727  |
| 40° | 6975   |
| 45° | 3291   |
| 50° | 1564   |
| 55° | 819    |
| 60° | 393    |
| 65° | 78     |
| 70° | 32     |
| 75° | 0      |
| 80° | 0      |
| 85° | 0      |

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 3291 cd/sqm



TEST NUMBER: P759416

CATALOG NUMBER: LD6D08D010-EU6DR450210IC9030-6LBS1LI

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 141.5  | 16.1      |
| 10°-20°   | 348.1  | 39.6      |
| 20°-30°   | 275.7  | 31.3      |
| 30°-40°   | 91.8   | 10.4      |
| 40°-50°   | 18.2   | 2.1       |
| 50°-60°   | 4.1    | 0.5       |
| 60°-70°   | 0.6    | 0.1       |
| 70°-80°   | 0.0    | 0.0       |
| 80°-90°   | 0.0    | 0.0       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 765.3  | 87.0      |
| 0°-40°    | 857.1  | 97.4      |
| 0°-60°    | 879.4  | 99.9      |
| 0°-90°    | 880.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 880.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°   | Flux |
|-----|------|------|
| 0°  | 1556 |      |
| 5°  | 1506 | 141  |
| 15° | 1278 | 348  |
| 25° | 594  | 276  |
| 35° | 133  | 92   |
| 45° | 21   | 18   |
| 55° | 4    | 4    |
| 65° | 0    | 1    |
| 75° | 0    | 0    |
| 85° | 0    | 0    |
| 90° | 0    |      |



TEST NUMBER: P759416

CATALOG NUMBER: LD6D08D010-EU6DR450210IC9030-6LBS1LI

**CANDELA DISTRIBUTION (FULL):**

|       | 0°     |
|-------|--------|
| 0°    | 1555.6 |
| 2.5°  | 1545.4 |
| 5°    | 1505.5 |
| 7.5°  | 1472.6 |
| 10°   | 1423.9 |
| 12.5° | 1359.0 |
| 15°   | 1278.2 |
| 17.5° | 1156.6 |
| 20°   | 986.5  |
| 22.5° | 783.9  |
| 25°   | 594.0  |
| 27.5° | 434.9  |
| 30°   | 312.8  |
| 32.5° | 212.7  |
| 35°   | 132.9  |
| 37.5° | 78.8   |
| 40°   | 48.9   |
| 42.5° | 32.2   |
| 45°   | 21.3   |
| 47.5° | 13.7   |
| 50°   | 9.2    |
| 52.5° | 6.1    |
| 55°   | 4.3    |
| 57.5° | 2.8    |
| 60°   | 1.8    |
| 62.5° | 1.0    |
| 65°   | 0.3    |
| 67.5° | 0.1    |
| 70°   | 0.1    |
| 72.5° | 0.0    |
| 75°   | 0.0    |
| 77.5° | 0.0    |
| 80°   | 0.0    |
| 82.5° | 0.0    |
| 85°   | 0.0    |
| 87.5° | 0.0    |
| 90°   | 0.0    |

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)